







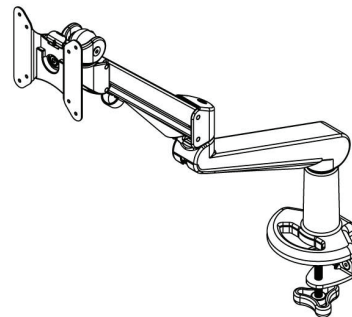









User Manual

Before assembly please spend some time reading this and follow the procedures step by step. Some panels are viewed differently from the detail drawing below. This is for extra clarity. Do not discard any of the packaging until you have checked all the parts and tools. If you are missing any of the parts, please contact your supplier.



Parts and Tools Check List

		X1		X1
		X1		X4
		X1		X1
		X1		X1
		X1		X1
		X1		X1
		X2		X1

X1



Assembly Guide

Step 1

"Clamp" Assembly

Adhere the pad to the base of the clamp.



Fits desk thicknesses from ~ 2.2" (56mm), then clamp the arm to the desk.

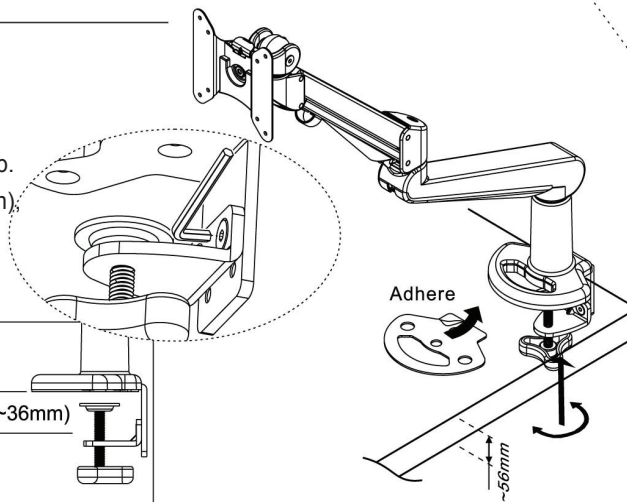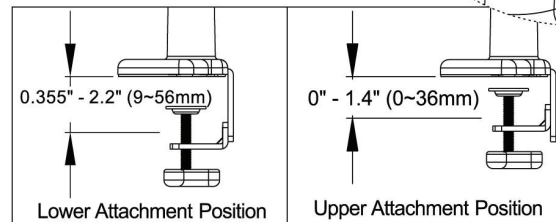

"Grommet" Assembly Step (1-1)


Use 4mm allen key to loosen the 3 screws, then detach clamp mount from the arm

Note: Do not lose the screws as they will be used to attach the grommet mount.

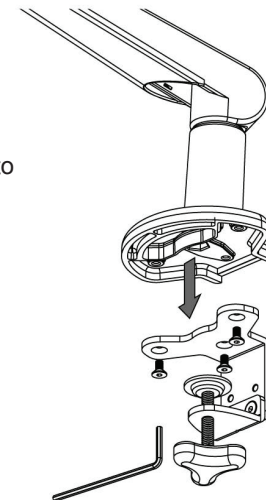

"Grommet" Assembly Step (1-2)

Place the small metal grommet mount plate on the bottom of the arm, then adhere the pad to protect the surface of the desk. Attach the arm to the desk by positioning over the grommet hole. The bolt should be visible under the desk. Secure the arm using the remaining parts as shown below. Grommet hole diameter should be between .78" - 2".

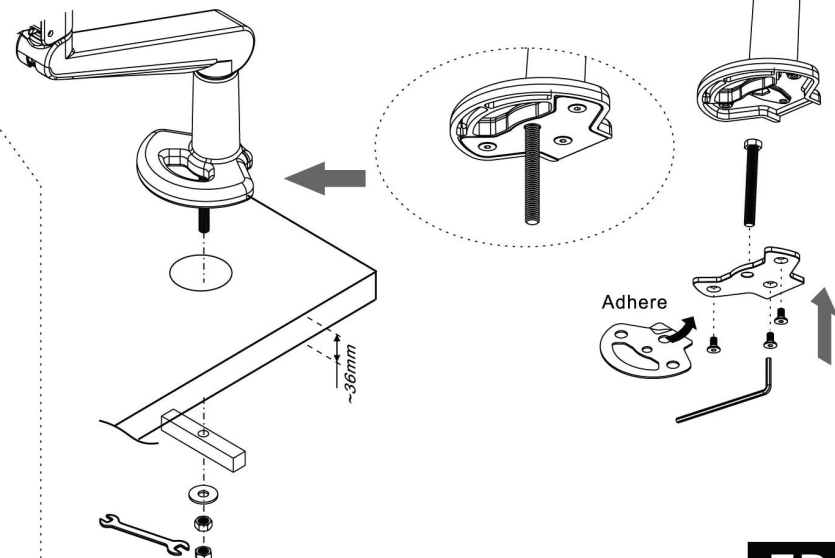

EDGE




CLAMP SCREWS ARE RATED AT 83" LBS OF TORQUE. PLEASE USE ALLEN WRENCH PROVIDED IN HARDWARE PACK TO FASTEN SCREWS SNUG FOR INSTALLATION.

Please contact your supplier for more information.


Step 2

Remove the VESA plate by pinching the grey plastic tab to release the lock, then pull the plate upward to separate from the arm.




Step 3

Place LCD monitor face down on a flat surface. Align the VESA plate holes with the holes on the back of the monitor and attach using the screws provided (shown below).

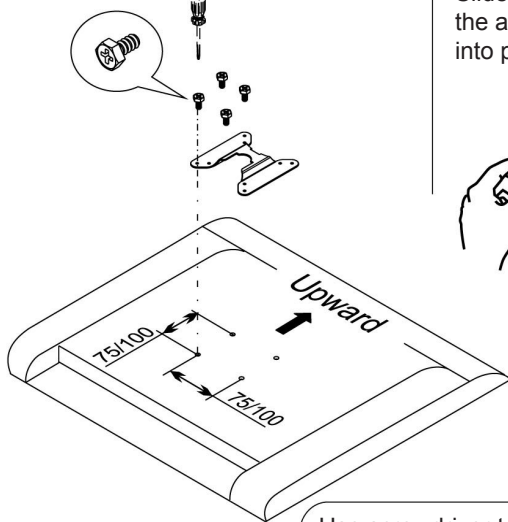


Use screwdriver to tighten the screw.




Step 4

Slide the monitor (with VESA plate) onto the arm making sure it "clicks" securely into place.

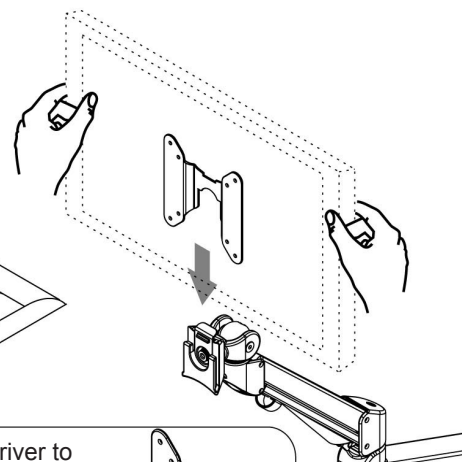

Step 5

Slide the cable cover upward to allow room for cables to be placed inside. Route cables under arm then slide the cover back on.

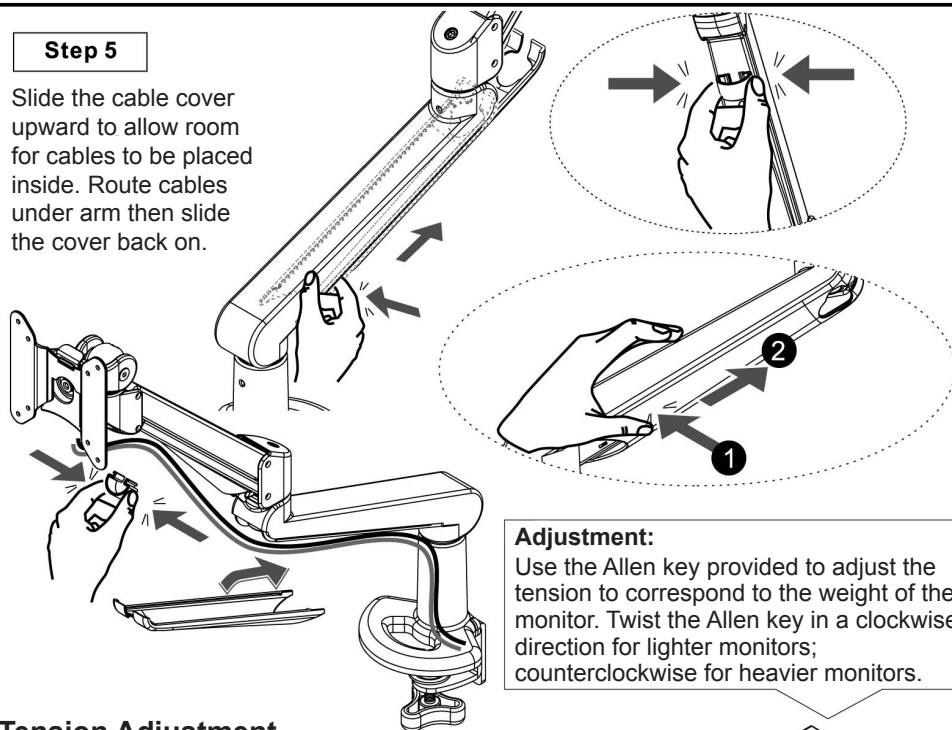

Adjustment:

Use the Allen key provided to adjust the tension to correspond to the weight of the monitor. Twist the Allen key in a clockwise direction for lighter monitors; counterclockwise for heavier monitors.

Tension Adjustment

Caution:

Support arm while adjusting tension.

Weight Capacity:


6.6 ~ 17.6 lbs (3~8kg)

- Product loading capacities are based on monitors' center of gravity less than 3cm (1 3/16") from the end of the VESA interface.
- Loading capacity could be reduced if monitor size is greater than 26" or depth is greater than 5.5cm (2 11/64").
- All product specifications in catalogs are subject to change without notice.

180° Lockout Feature:

- Fasten the screw to the bottom with 2mm Allen Key and then move backward one circle to have the limited 180° rotation if necessary.

360° lockout. Install included set screw here.

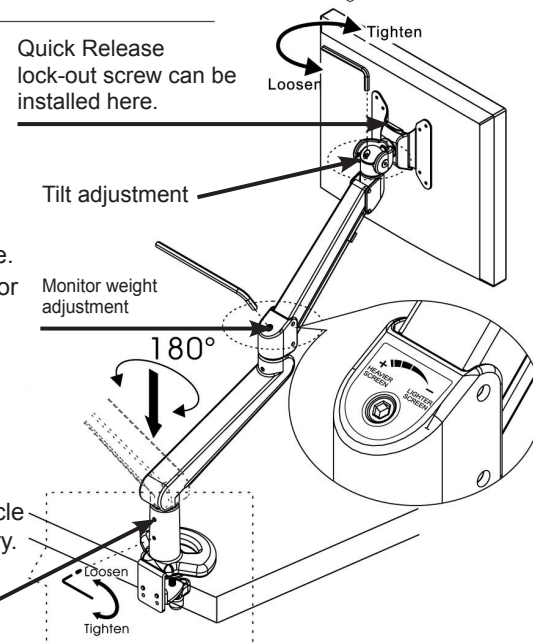

Please contact your supplier for more information.