

FULL VISION SHOW CASE ASSEMBLY INSTRUCTIONS

 **DISPLAYS2GO**


Display Stuff **Better.**



TOOLS NEEDED



Scan to visit the
product page!



NOTE: It is recommended that two persons assemble this unit.

1.

BASE ASSEMBLE

BOTTOM PANEL (x1)
TOE KICK (x2)
#10 CAM LOCK (x16)
BOLT (x4)
GLID (x4)

1. Connect toe kick panel with bottom panel using bolts.
2. Insert and tighten #10 cam lock.
3. Attach glides to the toe kick.



2.

SIDE PANEL AND FRONT GLASS ASSEMBLE

LEFT SIDE PANEL (x1)
RIGHT SIDE PANEL (x1)
BOLT (x12)
FRONT GLASS (x1)

1. Attach assembled base to right panel; tighten.
2. Insert front glass.
3. Attach left side panel to assembled base; tighten.
4. Sit showcase on floor.




3.

ALUMINUM EXTRUSION RAIL ASSEMBLE

U CHANNEL (x6FT) **#6 x 158 PHILLIPS SCREW** (x6)
AK0312 (x1) **FELT** (x12FT)
AK0313 (x1) **#12 SCREW CAP** (x6)
AK0314 (x1)

1. Attach U channel on top glass, cut off leftover.
2. Attach AK0312 to top glass; tighten by using 2 #6 x 158 phillips screw.
3. Tighten AK0314 with case by using 4 #6 x 158 phillips screw.
4. Put AK0313 onto bottom panel.
5. Adhere felt on both AK0312 and AK0314.
6. Place #12 screw caps onto #6 x 158 phillips screws.

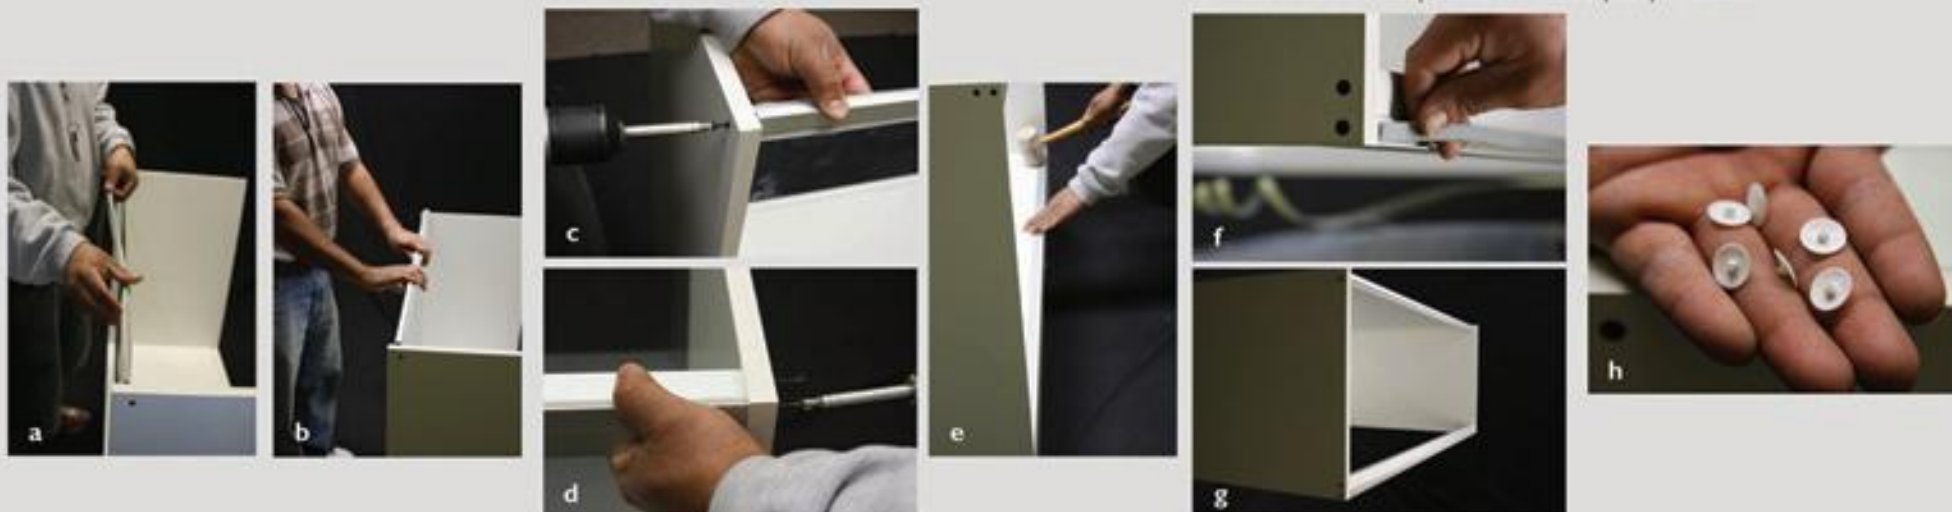

4.

STANDARD ASSEMBLE

SS27CD (x3)
#6 x 34 PHILLIPS SCREW (x3)
#6 x 12 PAN SCREW (x6)

1. Tighten SS27CD on AK0314 using 1 #6 x 34 phillips screw.
2. Tighten the same SS27CD part on base with 2 #6 x 12 pan screws.
3. Repeat steps 1 & 2 to assemble the other 2 pcs of SS27CD.



5.

GLASS SHELF & TOP GLASS ASSEMBLE

BT8C (x3)
BT10C (x3)
8" SHELF GLASS (x1)
10" SHELF GLASS (x1)
TOP GLASS (x1)

1. Place BT8C & BT10C on SS27CD with proper height.
2. Place 10" glass shelf on BT10C; put 8" glass shelf on BT8C.
3. Gently sit top glass on the top frame.



6.

DOOR PANEL ASSEMBLE

DOOR PANEL (x2)

1. Insert doors on showcase.

