

INSTRUCTION SHEET

OFF VEHICLE CARBURETOR SERVICE

ROCHESTER—MODEL 2SE


50-572-7

PRI. & SEC. VACUUM BREAK

DISASSEMBLY

GENERAL EXPLODED VIEW

THE GENERAL DESIGN AND PARTS SHOWN WILL VARY TO
INDIVIDUAL UNITS COVERED ON THIS INSTRUCTION SHEET.

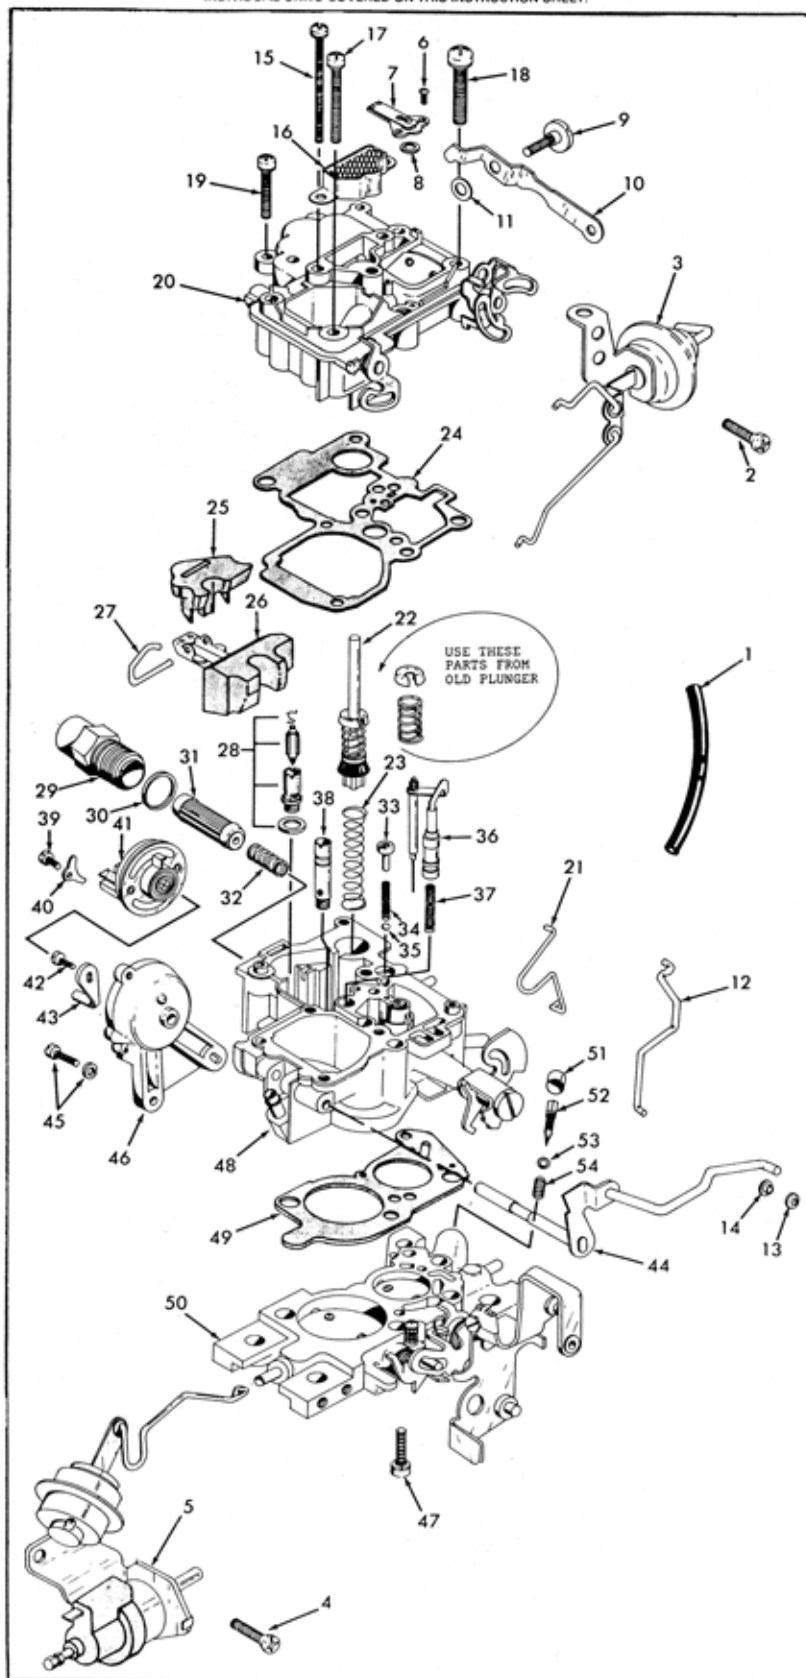

USE THE EXPLODED VIEW AS A GUIDE. THE NUMERICAL SEQUENCE MAY GENERALLY BE FOLLOWED TO DISASSEMBLE UNIT FAR ENOUGH TO PERMIT CLEANING AND INSPECTION. NOTE: MOST SCREWS HAVE SOME FORM OF LOCK TIGHT ON THEM. LINKAGE CONNECTED TO VACUUM BREAK UNITS CAN BE UNHOOKED AT ONE END ONLY. UNHOOK FAST IDLE ROD (21) WHEN REMOVING BOWL COVER. (FAST IDLE CAM AND SCREW ARE NOT REMOVABLE). TO REMOVE POWER PISTON ASSEMBLY (36) LIGHTLY BOUNCE VACUUM PISTON TO WORK RETAINER OUT OF CASTING. PULL PLASTIC RETAINER (33) OUT. DO NOT PRY OUT. THIS WILL DAMAGE THE SEALING BEADS ON THE BOWL CASTING. THE IDLE MIXTURE NEEDLE (52) IS SEALED WITH A HARDENED STEEL PLUG. IF NECESSARY, TO REMOVE IDLE MIXTURE NEEDLE ON A MAJOR OVERHAUL, FOLLOW PROCEDURE IN FIG. 1 TO REMOVE STEEL PLUG. (THE IDLE MIXTURE NEEDLE HAS BEEN FACTORY ADJUSTED AND SEALED FOR EMISSION CONTROL).

TAMPER - RESISTANT CHOKE COVER

USING #21 DRILL (.159"), DRILL POP RIVET HEAD ENOUGH TO REMOVE HEAD. AFTER HEADS ARE REMOVED USE A DRIFT PUNCH AND SMALL HAMMER TO DRIVE THE REMAINDER OF THE RIVETS OUT OF THE CHOKE HOUSING. REMOVE CHOKE COMPONENTS. REPLACEMENT RETAINERS AND SELF TAPPING SCREWS OR POP RIVETS ARE FOUND IN REPAIR KIT

NOMENCLATURE

REF. NO.	REF. NO.
1. HOSE-VACUUM BREAK	27. PIN-FLOAT HINGE
2. SCREW (2)-VAC. BREAK BRACKET	28. NEEDLE & SEAT ASSEMBLY
3. PRI. VAC. BREAK, LINKAGE & BRACKET ASSY.	29. FILTER NUT-FUEL INLET
4. SCREW (2)-SEC. VAC. BREAK BRACKET	30. GASKET-FILTER NUT
5. SEC. VAC. BREAK, LINK, SOLENOID & BRACKET ASSEMBLY	31. FILTER-FUEL INLET
6. SCREW (2)-IDLE COMPENSATOR	32. SPRING-FILTER
7. IDLE COMPENSATOR	33. GUIDE-PUMP DISC, SPRING
8. GASKET-IDLE COMPENSATOR	34. SPRING-PUMP DISC
9. SCREW-PUMP LEVER	35. BALL-PUMP DISC
10. LEVER-PUMP	36. POWER PISTON ASSEMBLY
11. SPACE WASHER-PUMP LEVER SCREW	37. SPRING-POWER PISTON
12. ROD-PUMP	38. JET-PRIMARY
13. RETAINER (UPPER)-CHOKE ROD	39. SCREW (3)-CHOKE RETAINER
14. BUSHING-CHOKE ROD	40. RETAINER (3)-CHOKE COVER
15. SCREW & LOCKWASHER (2) LONG-BOWL COVER	41. ELECTRIC CHOKE COVER ASSEMBLY
16. VENT STACK	42. SCREW-CHOKE LEVER
17. SCREW & LOCKWASHER (1)-BOWL COVER	43. LEVER-CHOKE
18. SCREW & LOCKWASHER (1)-LARGE-BOWL COVER	44. CHOKE SHAFT & ROD ASSEMBLY
19. SCREW & LOCKWASHER (3)-BOWL COVER	45. SCREW & LOCKWASHER (2)-CHOKE HOUSING
20. BOWL COVER ASSEMBLY	46. HOUSING-CHOKE
21. ROD-FAST IDLE CAM	47. SCREW & LOCKWASHER (4)-THROTTLE BODY
22. PUMP ASSEMBLY	48. BOWL ASSEMBLY
23. SPRING-PUMP RETURN	49. GASKET-THROTTLE BODY
24. GASKET-BOWL COVER	50. THROTTLE BODY ASSEMBLY
25. INSERT-FLOAT BOWL	51. PLUG-IDLE NEEDLE SEAL (NOT REPLACED)
26. FLOAT ASSEMBLY	52. NEEDLE-IDLE ADJUSTING
	53. WASHER-IDLE NEEDLE
	54. SPRING-IDLE NEEDLE

CLEANING

CLEANING MUST BE DONE WITH CARBURETOR DISASSEMBLED. SOAK PARTS LONG ENOUGH TO SOFTEN AND REMOVE ALL FOREIGN MATERIAL. USE A CARBURETOR CLEANING SOLVENT. MAKE CERTAIN THE THROTTLE BORES ARE FREE OF ALL CARBON DEPOSITS. CAUTION: THE SECONDARY THROTTLE BORE & VALVE IS COATED WITH A SPECIAL GRAPHITE COMPOUND. CARE SHOULD BE TAKEN DURING CLEANING AS NOT TO DISTURB THESE COATINGS. RINSE OFF IN A SUITABLE SOLVENT. BLOW OUT ALL PASSAGES IN CASTINGS WITH COMPRESSED AIR AND CHECK CAREFULLY TO INSURE THOROUGH CLEANING OF OBSCURE AREAS. CAUTION: DO NOT SOAK DIAPHRAGM UNITS, SOLENOIDS, FLOAT, ELECTRIC CHOKE, PLASTIC FILLER BLOCK, OR PARTS CONTAINING RUBBER IN CLEANING SOLVENTS. (PLASTIC BUSHINGS ON ROD ENDS WILL WITHSTAND NORMAL CLEANING IN CARBURETOR CLEANER).

REASSEMBLY

REASSEMBLE IN REVERSE ORDER OF DISASSEMBLY. NOTE SPECIAL INSTRUCTIONS AND FOLLOW NUMERICAL OUTLINE IN MAKING ADJUSTMENTS.

SPECIAL INSTRUCTIONS


IDLE ADJUSTING NEEDLE (52) TURN NEEDLE IN UNTIL LIGHTLY SEATED, THEN BACK OUT 3 TURNS.

POWER PISTON ASSEMBLY (36) PRESS DOWN FIRMLY ON PLASTIC POWER PISTON RETAINER TO MAKE SURE RETAINER IS SEATED IN RECESS OF FLOAT BOWL.


FUEL FILTER (31)-BE SURE TO USE FILTER WITH BUILT IN ROLL OVER CHECK VALVE AND WITH CHECK VALVE FACING OUT. TIGHTEN FILTER NUT (29) TO 18 FT. LBS.

NEEDLE & SEAT ASSY. (28)-WHEN INSTALLING FLOAT BE SURE TO HOOK NEEDLE PULL CLIP OVER EDGE OF FLAT ON FLOAT ARM FACING FLOAT PONTON. CAUTION: DO NOT HOOK PULL CLIP IN HOLES OF FLOAT ARM.

BOWL COVER INSTALLATION-TIGHTEN BOWL COVER SCREWS IN SEQUENCE SHOWN.




ADJUSTMENTS



SAW 2 SLOTS AS SHOWN (DO NOT EXTEND MORE THAN 1/8" BEYOND LOCATOR POINT). SUPPORT THROTTLE BODY, THEN PLACE A PUNCH IN THE LOCATOR POINT OF THE THROTTLE BODY, HOLDING PUNCH AT A 45° ANGLE, BREAKOUT THROTTLE BODY CASTING TO GAIN ACCESS TO THE HARDENED STEEL PLUG. HOLD A CENTER PUNCH VERTICAL DRIVE IT INTO THE STEEL PLUG (HARDENED PLUG WILL BREAK). REMOVE PIECES TO GAIN ACCESS TO IDLE MIXTURE NEEDLE.

IDLE MIXTURE NEEDLE PLUG REMOVAL


FIG. 1

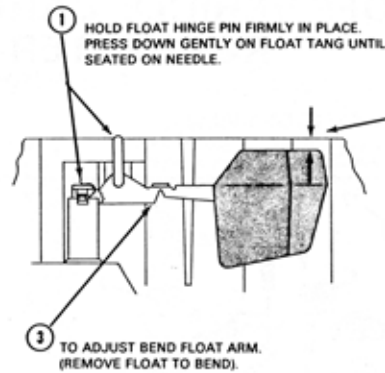

CAUTION: DO NOT EXERT PRESSURE ON RESILIENT NEEDLE VALVE


DRY FLOAT LEVEL ADJUSTMENT

FIG. 2

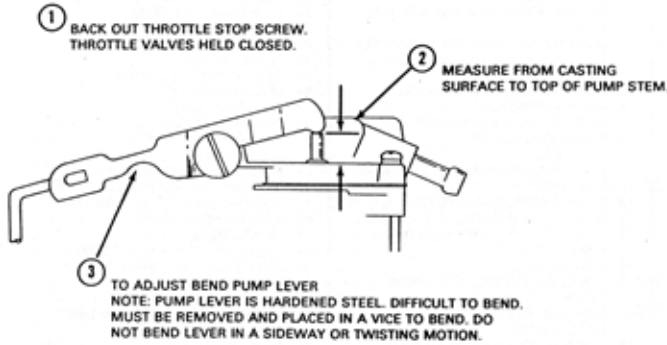

PUMP ROD ADJUSTMENT

FIG. 3

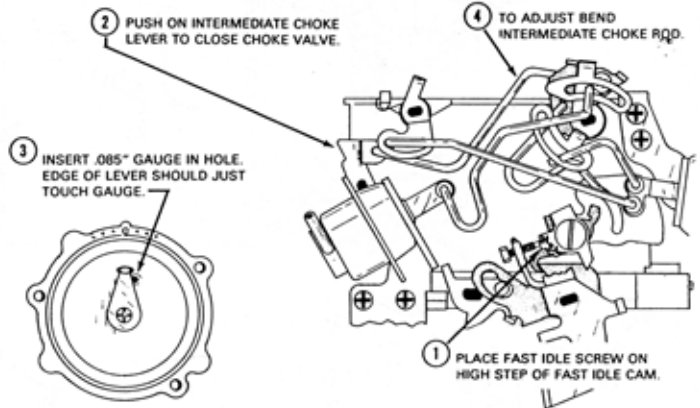


CHOKE COIL LEVER ADJUSTMENT

FIG. 4

- 1 ROTATE DEGREE SCALE UNTIL ZERO (0) IS OPPOSITE POINTER.
- 2 CHOKE VALVE HELD COMPLETELY CLOSED. PLACE MAGNET SQUARELY ON TOP OF CHOKE VALVE.
- 3 ROTATE BUBBLE UNTIL IT IS CENTERED.

CAUTION: PLACE CARBURETOR ON HOLDING FIXTURE SO THAT IT WILL REMAIN IN SAME POSITION, WHEN GAUGE IS IN PLACE.

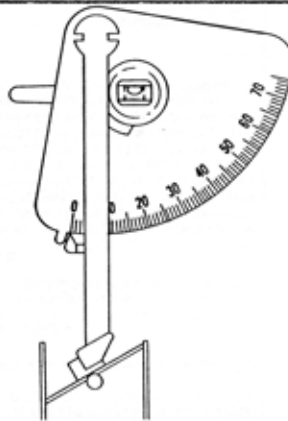

ANGLE GAUGE BASIC ADJUSTMENT

CONTINUE NUMERICAL OUTLINE IN EACH ADJUSTMENT USING DEGREE SETTING.

- 4 ROTATE SCALE SO THAT DEGREE SPECIFIED FOR ADJUSTMENT IS OPPOSITE POINTER.
- 5 FOLLOW NUMERICAL OUTLINE IN MAKING ADJUSTMENT.

GAUGE: J-26701 KENT MOORE TOOL
BT-7704 BORROUGHS TOOL



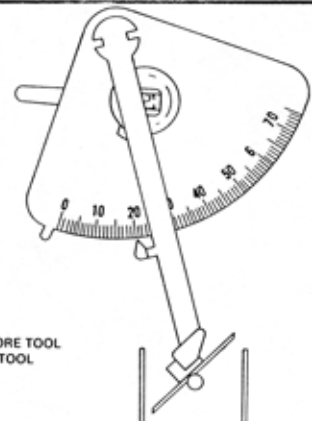


FIG. 5

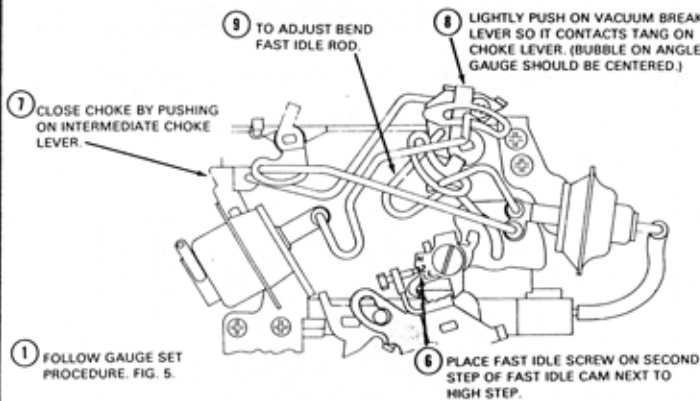









FAST IDLE CAM (CHOKE ROD) ADJUSTMENT

FIG. 6

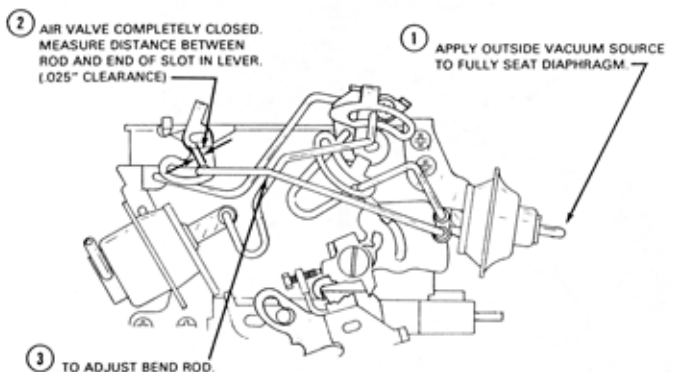


AIR VALVE ROD ADJUSTMENT

FIG. 7

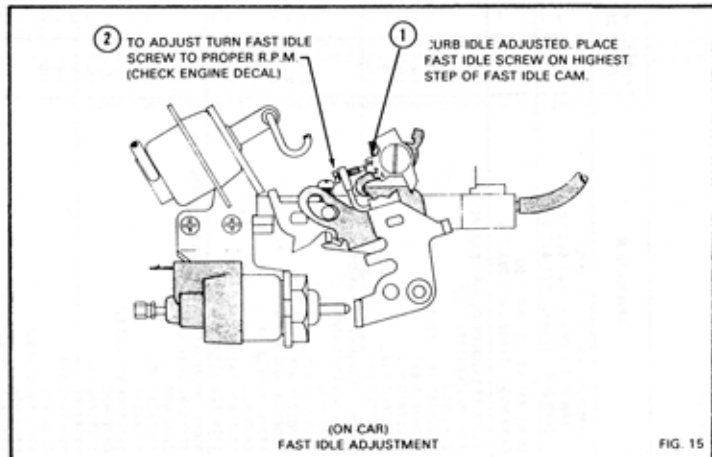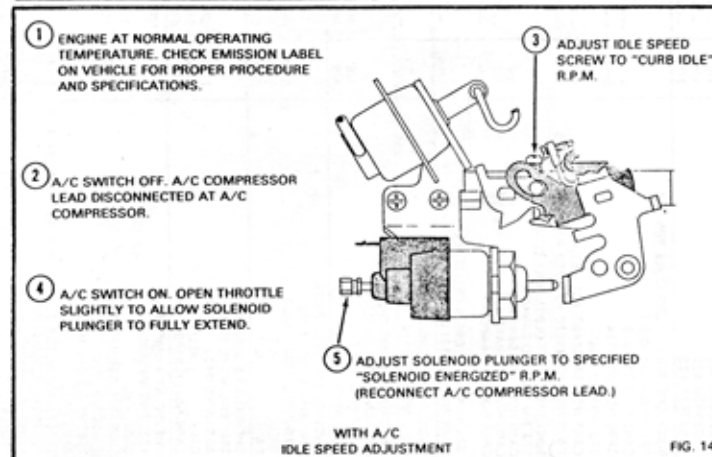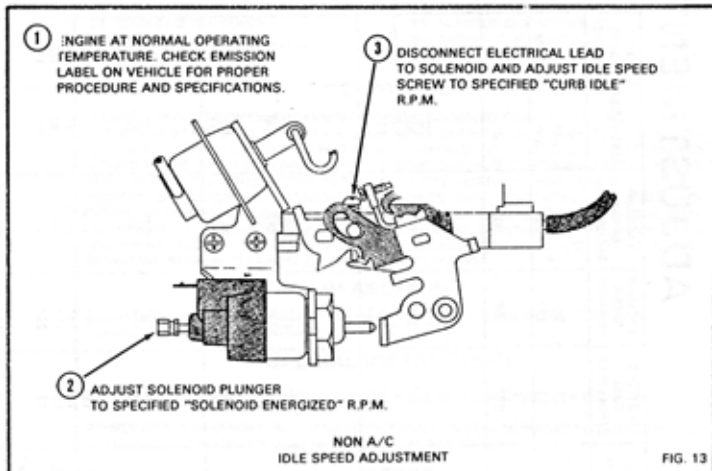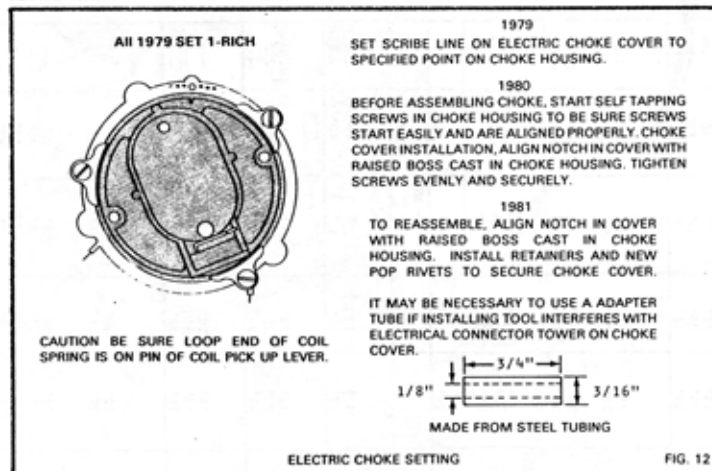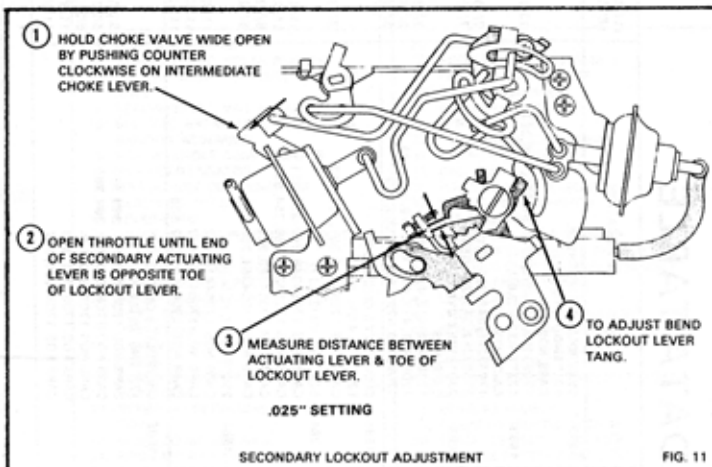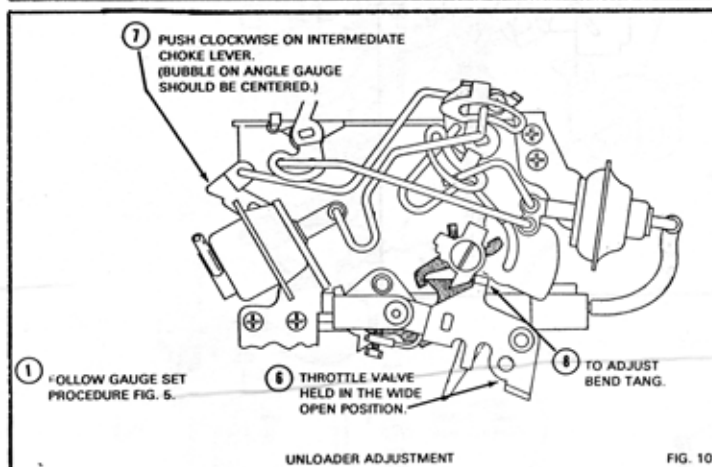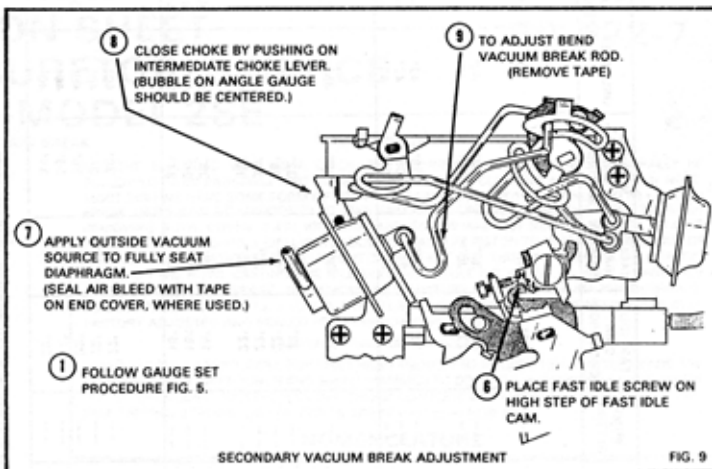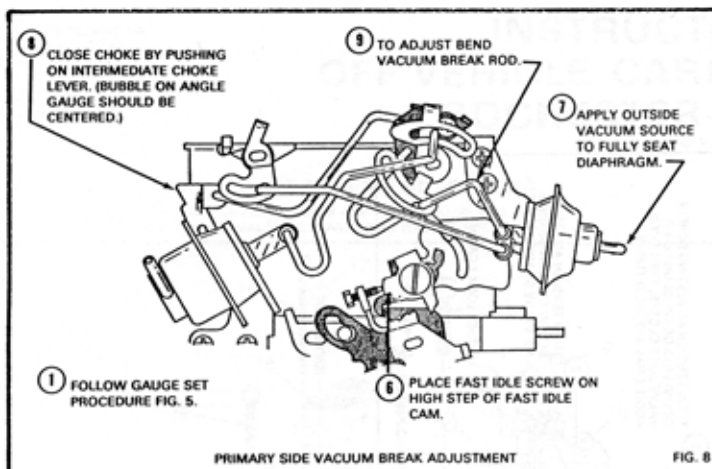

ADJUSTMENT DATA TABLE

YEAR	APPLICATION	FLOAT LEVEL	PUMP SETTING	FAST IDLE CAM (CHOKE ROD)	VACUUM BREAK PRIMARY	VACUUM BREAK SECONDARY	UNLOADER	AIR VALVE (TURNS)
1984	GM/JEEP V6 173" ENG (2.8L) CARB NOS. 17084560, 591, 592, 593 CARB NOS. 17084620, 621, 622, 623	5/32" 7/16"	---	22" 24"	26" 26"	32" 32"	40" 45"	1 1 1/4
1985	GM/JEEP V6 173" ENG (2.8L) CARB NOS. 17085380, 381, 382, 383	5/32"	---	22"	26"	32"	40"	1
1980-81	BUICK, CHEVROLET, OLDSMOBILE, PONTIAC CARB NOS. 17087550, 751, 752, 753 17087651, 651 17087652, 652 17087653, 653 17087654, 654 17087655, 655 17087656, 656 17087657, 657	5/32" 1/4" 1/4" 1/4" 1/4" 1/4" 1/4"	17/32" 17/32" 17/32" 17/32" 17/32" 17/32" 17/32"	24" 24" 24" 24" 24" 24" 24"	30" 30" 30" 30" 30" 30" 26"	38" 37" 38" 38" 32" 32" 32"	30" 30" 30" 30" 30" 30" 30"	1 1 1 1 1 1 1
1982	BUICK, CHEVROLET, OLDSMOBILE, PONTIAC 112" ENG. 4 CYL (1.8L) CARB NOS. 17082310, 312, 314 17082311, 315 17082401, 402, 404, 405 173" ENG. V6 (2.8L) CARB NOS. 17082440, 441, 442, 443 17082550, 551, 552, 553	5/16" 5/16" 5/16" 1/4" 7/16"	---	29" 23" 24" 24" 24" 24" 24"	17" 20" 20" 30" 30" 30" 30"	22" 24" 24" 32" 32" 32" 32"	35" 35" 35" 45" 45" 45" 45"	1/2 1/2 1/2 1 1 1 1
1983	BUICK, CHEVROLET, OLDSMOBILE, PONTIAC 121" ENG. 4 CYL (2.0L) CARB NOS. 17083311, 401 17083312, 402 173" ENG. V6 (2.8L) CARB NOS. 17083460, 462 17083461 17083464, 466 17083465 173" ENG. V6 (2.8L) CARB NOS. 17083440, 441, 442, 443 17083444, 445 17083620, 622 17083621, 623	5/16" 5/16" 1/4" 1/8" 1/8" 1/8" 1/8" 1/4" 7/16"	---	24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24" 24"	18" 16" 18" 18" 18" 18" 20" 28" 28" 28" 28" 28" 28" 28" 28" 28" 28" 28" 28"	20" 20" -- -- -- -- 32" 32" 32" 32" 32" 32" 32" 32" 32" 32" 32" 32" 32"	35" 35" 38" 38" 38" 38" 38" 45" 45" 45" 45" 45" 45" 45" 45" 45" 45" 45" 45"	1/2 1/2 1/2 1/2 1/2 1/2 1/2 1 1 1 1 1 1 1 1 1 1 1
1984	BUICK, CHEVROLET, OLDSMOBILE, PONTIAC 121" ENG. 4 CYL (2.0L) CARB NOS. 17084312 CARB NO. 17084314 173" ENG. V6 (2.8L) CARB NOS. 17084480, 481, 482, 483, 484, 485 CARB NOS. 17084520, 521, 522, 523	5/16" 5/16" 1/4" 7/16"	---	24" 29" 24" 24" 24"	18" 16" 28" 28" 28"	20" 20" 32" 32" 32"	35" 30" 45" 45"	1/2 1/2 1 1/4 1 1/4
1984-86	BUICK, CHEVROLET, OLDSMOBILE, PONTIAC 173" ENG. V6 (2.8L) CANADA CARB NOS. 17084486, 487 CARB NOS. 17084487 CARB NOS. 17084488, 488 CARB NOS. 17084489, 489	3/8" 1/8" 1/8" 7/16"	---	24" 24" 24" 24"	28" 28" 28" 28"	32" 32" 32" 32"	45" 45" 45" 45"	1 1/4 1 1/4 1 1/4 1 1/4
1983	CADILLAC 121" ENG. 4 CYL (2.0L) CARB NO. 17083314	5/16"	---	24"	16"	20"	35"	1/2
1984	CADILLAC 121" ENG. 4 CYL (2.0L) CARB NO. 17084314	5/16"	---	29"	16"	20"	30"	1/2
1979	CHEVROLET & GMC TRUCK 350" ENG. 6 CYL (4.1L) SOSTATES, MT SOSTATES, MT	1/8" 1/8"	9/16" 9/16"	17" 17"	33 1/2" 20"	37" 37"	49" 49"	---
1980	CHEVROLET & GMC TRUCK 450" ENG. 6 CYL (4.1L) SOSTATES, MT SOSTATES, MT SOSTATES, MT	3/16" 3/16" 3/16" 3/16"	9/16" 9/16" 9/16" 9/16"	17" 17" 17" 17"	22" 22" 22" 22"	35" 35" 35" 35"	41" 41" 41" 41"	---
1981	CHEVROLET & GMC TRUCK 450" ENG. 6 CYL (4.1L) SOSTATES, MT SOSTATES, MT SOSTATES, MT	3/16" 3/16" 3/16" 3/16"	5/8" 5/8" 5/8" 5/8"	15" 15" 15" 15"	28" 28" 28" 28"	38" 37" 37" 34"	38" 41" 41" 41"	---
1982	CHEVROLET & GMC TRUCK 173" ENG. V6 (2.8L) CARB NOS. 17082348, 349, 350, 351 17082353, 355 250" ENG. 6 CYL (4.1L) CARB NOS. 17082334, 335, 337, 338, 339, 340, 481, 482, 483, 484, 485 17082336, 482, 500, 502 17082341, 342, 344, 345 17082431 17082486, 487, 488, 489	7/16" 7/16" 3/16" 3/16" 3/16" 3/16" 3/16" 3/16" 3/16"	---	22" 22" 15" 15" 15" 15" 15" 15" 15"	30" 26" 26" 26" 26" 26" 26" 26" 26"	35" 38" 38" 38" 38" 38" 38" 38" 38"	40" 42" 42" 42" 42" 42" 42" 42" 42"	1 1 ---

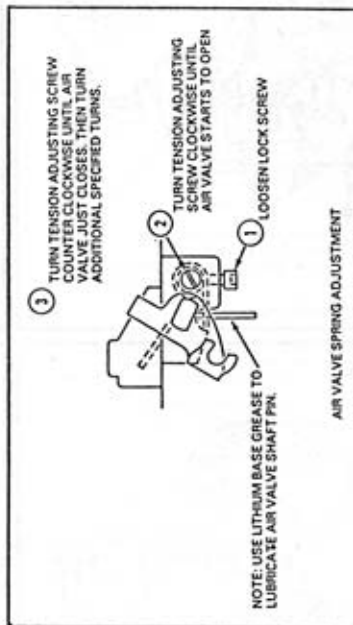

AIR VALVE SPRING ADJUSTMENT