



Scotseal TF Hubcaps

Heavy duty durability and dependability
from the wheel-end experts at SKF.




SKF Scotseal TF Hubcaps:

Lighter than steel. Tougher than aluminum.

- Heavy duty durability
- Oil bath and grease-packed designs
- Compatible with all popular oils and greases including the latest synthetics
- Approved by all major OE truck and trailer manufacturers with growing number installing them as standard equipment
- Will run well over 450,000 maintenance-free miles
- Exclusion technology with multiple barriers protects seals and bearings from outside contamination.

Knowledge engineering by SKF


There are other hubcaps on the market, but none providing better wheel-end protection than Scotseal TF Hubcaps. Check out all the special features shown here, each designed to protect your wheel end components and extend the service life of bearings and hub units. For well over a decade, TF Hubcaps have helped fleets log literally billions of trouble-free miles. But what else would you expect from the company that has led the way in advanced bearing and seal technologies for 100 years.

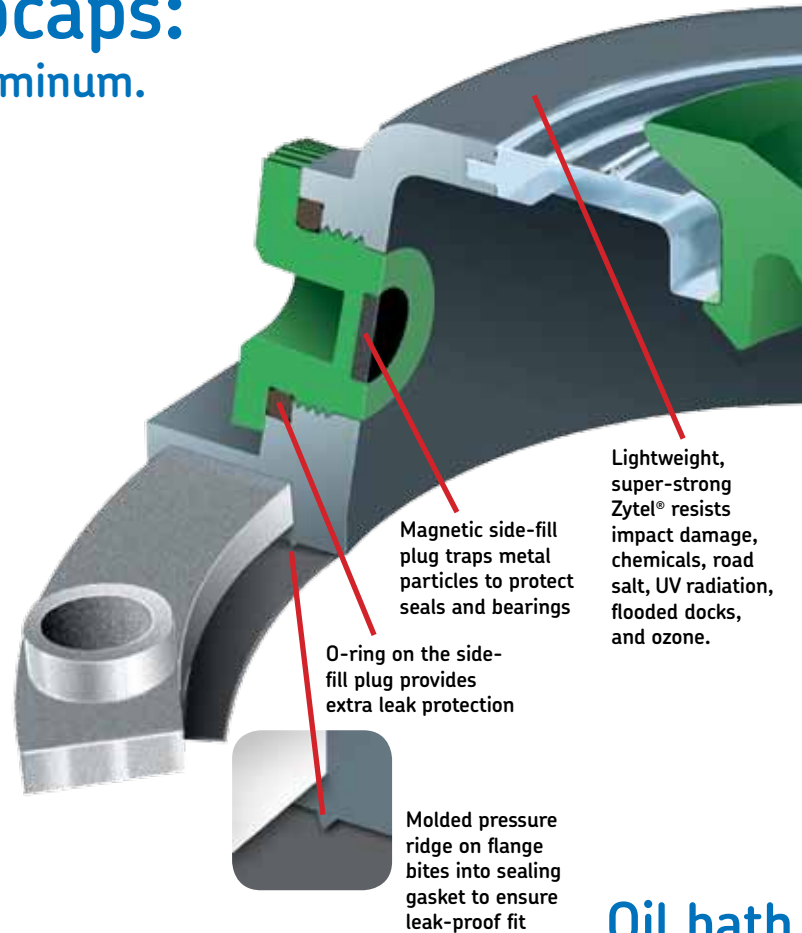


Oil bath

SKF Splashguard

Upgraded vent system and protection

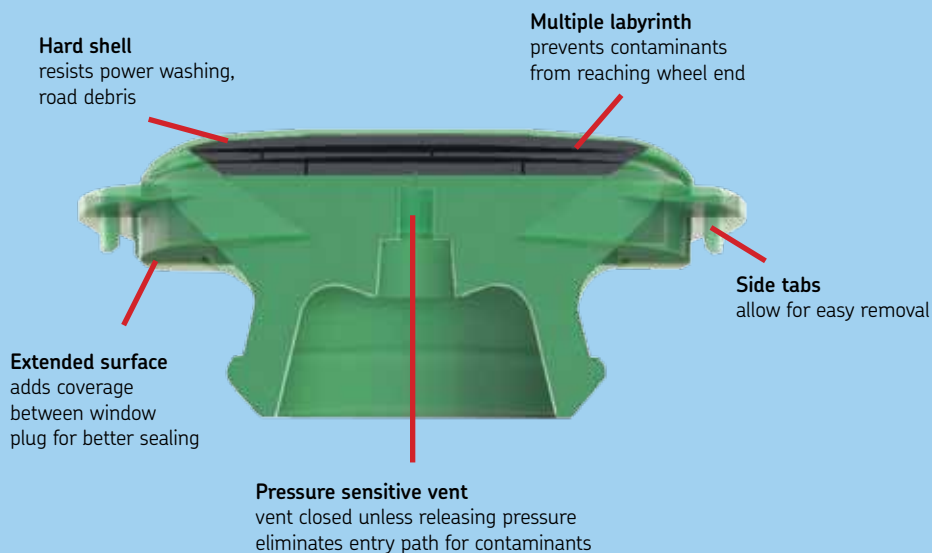


Splashguard center plugs are available in green and black 4 packs	Standard center plug	Splashguard center plug
Green	450434	450439
Black	453807	450438
Display (6 sets each)		454210
Display (12 sets green)		454215
Display (12 sets black)		454216

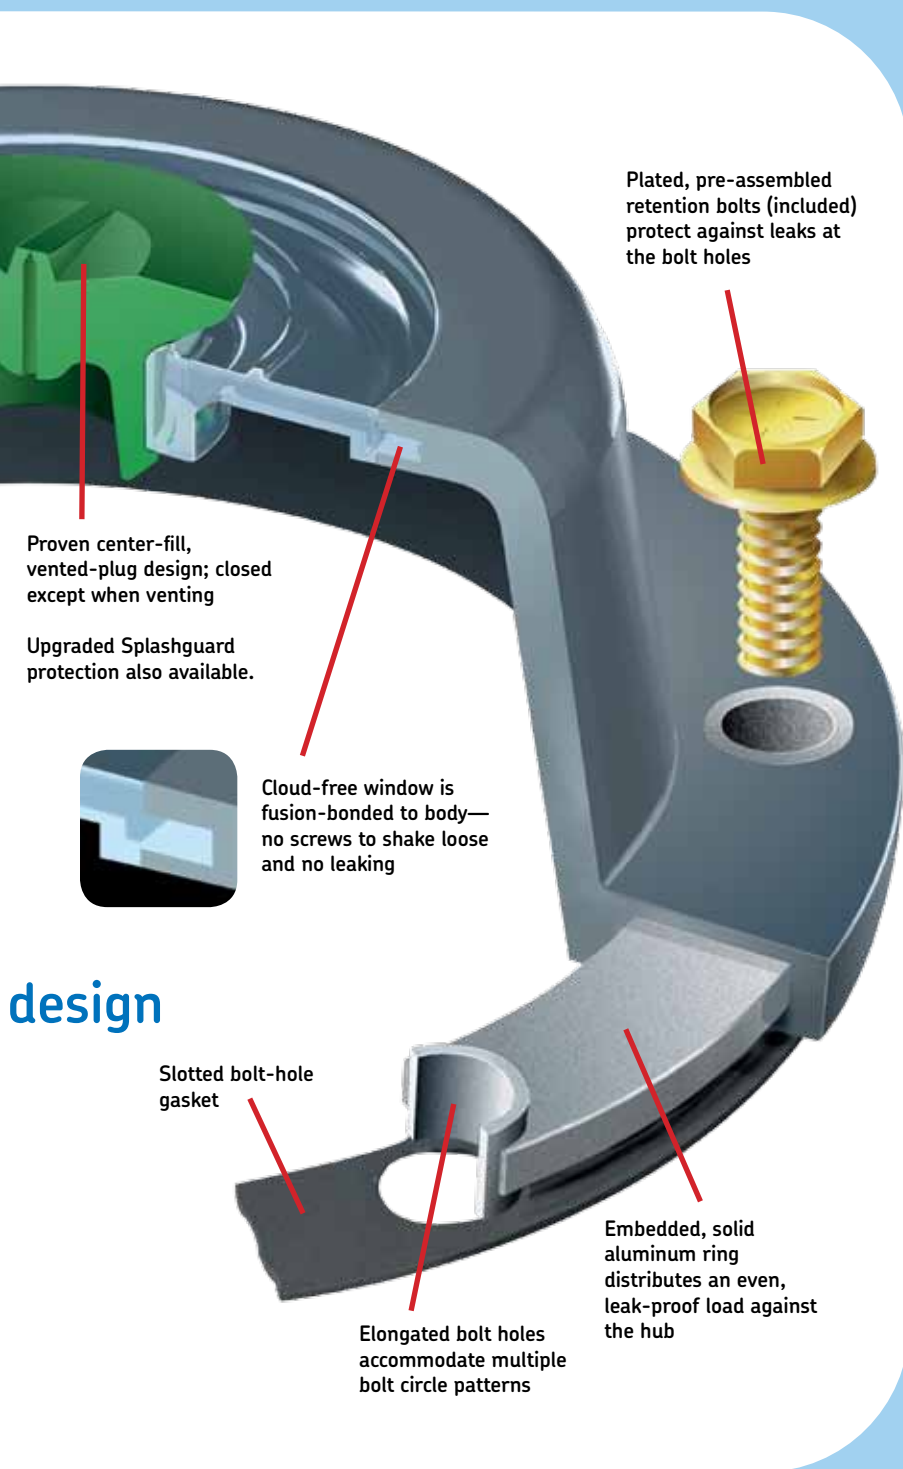

design

Other popular SKF hubcap designs

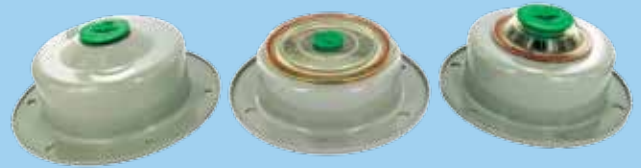

Scotseal® Stamped Steel

Zinc-plated and protected with weather-resistant armor to resist rust and rough wear. Available in 3- to 8-bolt designs.

Scotseal Lexan®

Lightweight, molded design handles harsh conditions; sealed models offered for grease-packed systems. Available for oil and grease pro-par applications.



SKF Scotseal TF hubcaps equipped for P.S.I.

The SKF hubcap line just got stronger. You can now equip your trailers with the SKF Scotseal TF hubcaps you prefer. SKF hubcaps equipped for P.S.I. incorporate the same durable and leak-proof technology you count on from the SKF Scotseal TF hubcaps.

Four new SKF hubcaps are compatible with the Meritor® Tire Inflation System (MTIS) by P.S.I., an automatic tire inflation system (ATIS™). The system increases tire life, fuel efficiency and vehicle productivity.



Tamper-Proof Scotseal TF for grease-packed applications



Designed for today's grease-packed systems, the Tamper-Proof Scotseal TF Hubcap features a patented "umbrella" style valve that seals contamination out, yet vents internal pressure as low as 2 P.S.I. The addition of a splash plate to the

hubcap design helps protect against the harsh conditions created by road spray, power washers and flooded docks.



"Umbrella" valve vents pressure even when covered with 1/4" grease; Splash plate provides extra protection against power washers

SKF Hubcap barrel program:

Order the most popular SKF hubcaps in barrel quantities.

Order by SKF barrel part numbers:

- 1343B** – Trailer axle (grease)
- 1399B** – Trailer Pro-Par axle (grease)
- 1612B** – Steer axle (oil) – black
- 1612B-SG*** – Steer axle (oil) – black
- 1643B** – Trailer axle (oil)
- 1643B-SG*** – Trailer axle (oil)
- 1644B** – Trailer axle (oil) – black
- 1644B-SG*** – Trailer axle (oil) – black
- 1696B** – Trailer Pro-Par axle (oil)
- 1696B-SG*** – Trailer Pro-Par axle (oil)

* Upgraded vent system with splashguard protection.

Each barrel contains:

- 100 bulk packed hubcaps with gaskets and (6) 453963 fastening bolts
- Packaged individually in heavy duty plastic
- 16" x 16" SKF product decal

Note: Barrel #1399B, 1696B and 1696B-SG contain 75 hubcaps



1612 / 1643 / 1644 / 1696


- Lightweight DuPont Zytel material
- Embedded solid aluminum ring, distributes an even, leak proof load against the hub
- Increased impact resistant
- Leak-proof window is fusion-bonded to body



1343 / 1399

- Designed for semi-fluid grease applications
- Tamper-proof design
- "Umbrella" valve vent seals out contaminations yet vents internal pressure as low as 2 psi when covered by 1/4" of grease


Scotseal TF numerical list

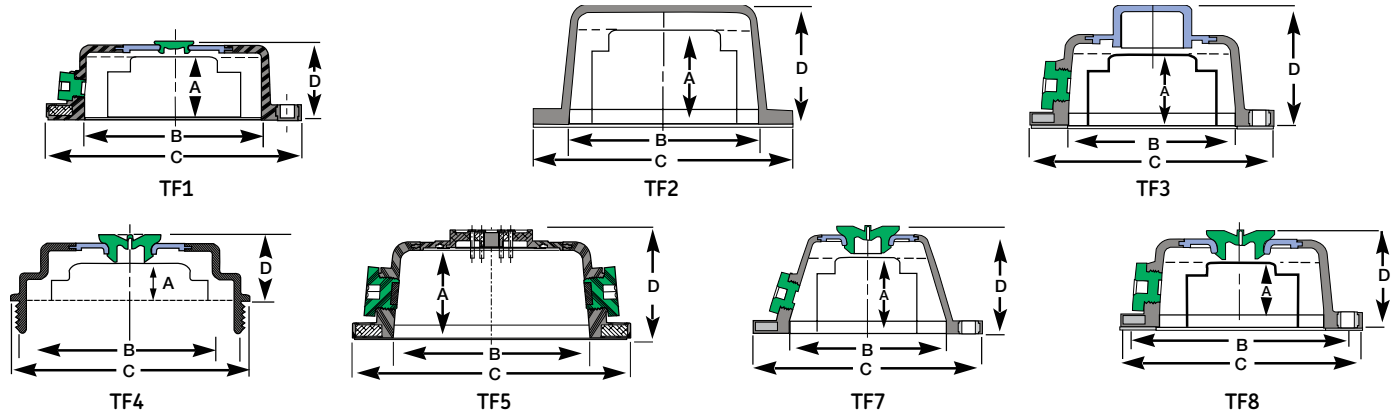

SKF number								Max. axle	Hubcap size			
Hubcap kit	Gasket	Std. Plug	Splashguard plug	Side fill	Bolt holes	Hole size	Bolt circle	Ext. (A)	I.D. (B)	O.D. (C)	Height (D)	Type
1282**	454051	450434	450439	-	6.250 x 8	0.D.	Threaded	1.886	6.060	6.465	1.750	TF4
1600♦	453795	-	-	453770	6	.349	5.500-5.562	1.990	4.432	6.250	3.082	TF3
1601♦	453818	-	-	453770	5	.349	5.500	1.920	4.440	6.250	3.012	TF3
1608*	453868	453879	-	453811	4	.349	3.625	1.808	2.400	4.313	2.024	TF8
1612*■	453869	453807	450438	453811	6	.349	4.500	1.880	3.500	5.250	2.609	TF8
1613*	453795	453879	-	453942	6	.349	5.500-5.562	1.586	4.385	6.250	1.643	TF1
1623	453909	450434	450439	453770	6	.349	5.125-5.250	2.125	4.132	6.000	2.632	TF8
1627	453912	450434	450439	453770	3	.416	5.250	2.125	4.132	6.000	2.632	TF8
1630*	453795	453807	450438	453811	6	.349	5.500-5.562	2.220	4.290	6.250	2.727	TF7
1640	453795	-	-	-	6	.349	5.500-5.562	2.055	4.440	6.250	2.235	TF2
1642	453818	450434	450439	453770	5	.349	5.500	1.730	4.440	6.250	2.469	TF8
1643■	453795	450434	450439	453770	6	.349	5.500-5.562	1.730	4.440	6.250	2.469	TF8
1644*■	453795	453807	450438	453811	6	.349	5.500-5.562	1.730	4.440	6.250	2.469	TF8
1665	453909	450434	450439	453770	6	.349	5.125-5.250	1.400	4.132	6.000	1.905	TF8
1669*	453918	453813	-	453819	6	.349	5.875	1.323	4.715	6.580	1.600	TF8
1670*	453825	450434	450439	453770	6	.286	6.625	1.775	5.526	7.344	2.564	TF8
1681	453915	450434	450439	453770	4	.349	5.000	1.375	4.060	5.615	1.880	TF8
1691*	453795	453879	-	453942	6	.349	5.500-5.562	1.120	4.257	6.250	1.397	TF1
1696■	450799	450434	450439	453770	6	.349	6.750	2.887	5.625	7.500	3.688	TF8
1698	453906	450434	450439	453770	6	.416	6.000	2.000	5.000	6.750	2.507	TF8
1943*	453795	-	-	453770(2)	6	.349	5.500-5.562	1.703	4.420	6.250	2.441	TF5
1996*	453795	-	-	453770(2)	6	.349	6.750	2.805	5.627	7.500	3.650	TF5

* Black ** Lexan design ♦Hubodometer mount design *Designed for PSI system ■Available as Splashguard caps (i.e. 1612-SG)

Tamper proof

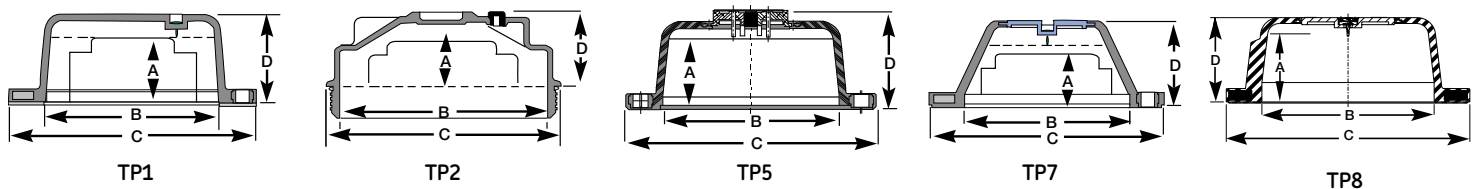

SKF number					Max. axle	Hubcap size			
Hubcap kit	Replacement gasket	Bolt holes	Hole size	Bolt circle	Ext. (A)	I.D. (B)	O.D. (C)	Height (D)	Type
1284**	454051	6.250 x 8 O.D.		Threaded	1.801	6.060	6.465	1.516	TP2
1311	453869	6	0.349	4.500	1.781	3.500	5.250	2.370	TP1
1331	453795	6	0.349	5.500-5.562	2.081	4.287	6.250	2.727	TP7
1343	453795	6	0.349	5.500-5.562	1.703	4.420	6.250	2.161	TP1
1343W	453795	6	0.349	5.500-5.562	1.703	4.420	6.250	2.161	TP8
1399	450799	6	0.349	6.750	2.805	5.662	7.500	3.455	TP1
1399W	450799	6	0.349	6.750	2.805	5.627	7.500	3.64	TP8
1443*	453795	6	0.349	5.500-5.562	1.703	4.420	6.250	2.443	TP5
1499*	450799	6	0.349	6.750	2.805	3.640	7.500	3.640	TP5

**Lexan design *Designed for PSI system



SKF Hubcap interchange reference chart

SKF TF/Zytel			Stemco				Sentinel		National Oil	Dual Dynamics		
Oil	Grease	Application	Oil			Oil	Grease			Oil	Grease	SKF Steel
1282 ²	1284 ²	Pro-Par Trailer		343-4075		348-4075	349-4075		HU-075A	276-P	275-G	
1600		Trailer/Hubo	347-4009									
1601		Trailer/Hubo	347-4013									
1608 ¹		Steer	340-4065	343-4065					HU-065A			
1612 ¹	1311 ¹	Steer	340-4024	343-4024	350-4024				HU-024A	302-P	301-G	1711
1613 ¹		Steer	340-4249	343-4249	350-4249				HU-149A			1703
1623		Trailer	340-4066	343-4066					HU-066A			1723
1627		Trailer	340-4002	343-4002								1727
1627		Steer	340-4019	343-4019					HU-019A			
1630 ¹	1331	Trailer	340-4014	343-4014							202-G	
1642		Trailer	340-4013	343-4013		348-4013	349-4013		HU-013A	282-P		1742
1643	1343	Trailer	340-4009	343-4009		348-4009	349-4009		HU-009A	203-P	283-G	1743
1643	1343	Trailer	340-4046	343-4046					HU-046A	303-P	304-G	
1644 ¹	1343	Trailer/Steer	340-4009	343-4009		348-4009	349-4009					1743
	1343W	Trailer					342-4009					
1665		Trailer	340-4042	343-4042					HU-042A			1765
1669 ¹		Steer	340-4025	343-4025	350-4025				HU-036A			
1670 ¹		Steer	340-4034	343-4034	350-4034				HU-034A			1770
1681		Trailer	340-4029	343-4029					HU-028A			
1691 ¹		Steer	340-4098	343-4098								1790
1696	1399	Trailer	340-4195	343-4195		348-4195	349-4195			257-P	255-G	1796
	1399W	Trailer					342-4195					
1698		Trailer	340-4059	343-4059								1798
1698		Trailer	340-4080	343-4080								
1943 ³	1443 ³	Trailer		343-4370			340-4350			207-P	401-G	
1996 ³	1499 ³	Trailer		343-4372			340-4352			260-P	456-G	

¹ Black design

² Lexan design

³ Designed for P.S.I. system

SKF VSM NA
890 N. State Street
Suite 200
Elgin, IL 60123
800-882-0008
www.vsm.skf.com

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the information contained herein. SKF reserves the right to alter any part of this publication without prior notice.

- SKF, Scotseal and TF are registered trademarks of the SKF Group.