



## BEACONS

Lightbars | Minibars | Directional LEDs | Worklamps | Back-Up Alarms | Camera Systems

## 7960 SERIES SAE Class I LED

ECCO's 7900 Series LED beacons feature 16 of the latest high-intensity 3-watt LEDs, providing the brightest light output available in an LED beacon. Double or quad flash operation and hi/lo intensity control combine with a long maintenance-free service life and low-amp draw to make this beacon the perfect choice for any application. Easily replaces old rotating or strobe beacons with the latest technology, so no ongoing maintenance is required.


### Models

PART NO.	VOLTAGE	AMPS	FPM	MOUNT
7960A	12-24	3.7	80 Double or 65 Quad	3 Bolt Flange/1" Pipe
7960CX	12-24	3.7	80 Double or 65 Quad	3 Bolt Flange/1" Pipe
7960A-VM	12-24	3.7	80 Double or 65 Quad	Vacuum Magnet
7960CX-VM	12-24	3.7	80 Double or 65 Quad	Vacuum Magnet

Replace X in part number with desired color: A = amber, B = blue, C = clear, R = red

### Features and Benefits

- 16 3-watt LEDs provide unrivalled flash intensity
- Double or quad flash operation with hi/lo intensity control
- Die-cast aluminum base is coated against corrosion and designed for vibration resistance and heat dissipation (permanent mount versions are epoxy filled)
- Thread-on polycarbonate lens allows easy flash mode selection without tools
- Reverse polarity, voltage spike and surge protected
- SAE J845 Class I (A, CA, CB, CC & R only)
- CE, R10
- Temperature Range: -22°F to +122°F (-30°C to +50°C)
- Warranty: 5 Years

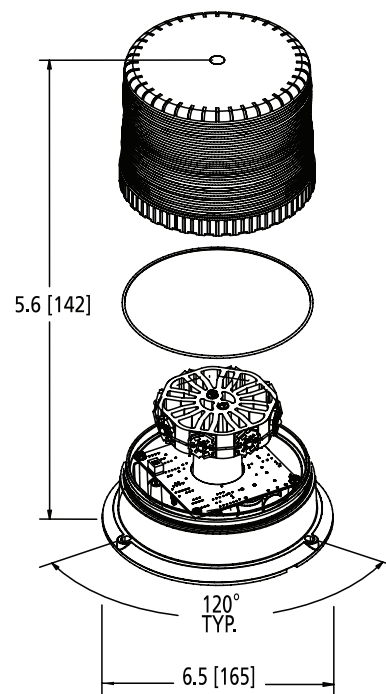

### Parts & Accessories

- Lenses: Amber - R7960LA  
Clear - R7960LC