



Leaders in Reception Seating

Lesro Industries, Inc.
1 Griffin Road South
Bloomfield, CT
06002

Phone
860.243.3226
Fax
860.243.5392
www.lesro.com

Assembly Instructions For Mystic Lounge

Tools required: 9/16" ratchet

Note: These instructions are intended for various models and configurations. Your products may not look exactly as shown in the diagrams.

Important: The assembly process requires that some hardware be kept loose until later in the sequence. Follow these instructions closely to ensure correct assembly.

Recommendation: Retighten all bolts on a seasonal basis to ensure your product remains strong and stable for many years of use.

Weight Capacity: All guest chairs in this series have a weight capacity of 350 lbs. per seat, unless otherwise stated.

Parts List


Arm Frames, left & right
Seat Cushion
Back Cushion

Hardware Pack

3" Hex Bolts, 6 pcs.
Washers, 6 pcs.

Panel Arm Guest Chair

1. Unpack and identify all parts.
2. Attach back cushion to arm frame by inserting posts into key hole slots, as shown in figure 1. With posts fully inserted, press back cushion down until posts "bottom-out" in key hole slots.
3. **Important note:** Thicker fabrics might make it difficult to fully insert the posts into the key hole slots. If this problem occurs, you must press the back and arm pieces tightly together. This will compress the fabric and foam and enable the post head to drop deep enough into the key hole slot.
4. Attach second arm frame to back cushion by repeating step 2.
5. When properly connected, bottom edge of back cushion should align with bottom edges of arm frames, as shown in figure 2.
6. Lay assembly on its back on a soft, clean surface and slide seat cushion into place, as shown in figure 3.
7. Attach seat cushion to back cushion and arm frames using 3" hex bolts and washers, as shown in figure 4. Keep all bolts slightly loose for now.
8. With all bolts connected but still loose, stand chair upright on a level surface. Align bottom edges of arm frames, back cushion and seat cushion, (similar to figure 2) and tighten all bolts securely.
9. Your product is now assembled and ready to use.

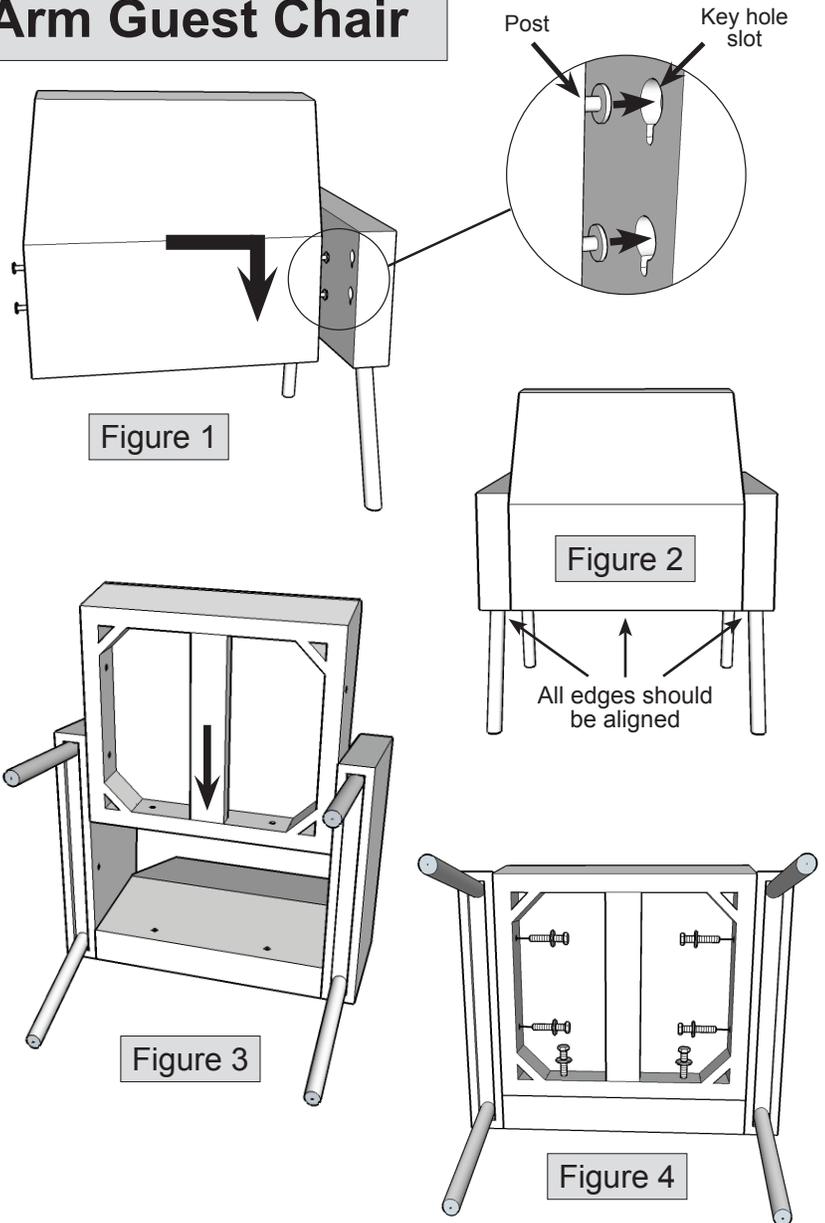

Thank you for purchasing a Lesro product.

Need assistance with assembly? Call Lesro customer service 1-800-275-7545.

Visit us online at www.lesro.com



Leaders in Reception Seating

Lesro Industries, Inc.
1 Griffin Road South
Bloomfield, CT
06002

Phone
860.243.3226
Fax
860.243.5392
www.lesro.com

Assembly Instructions For Mystic Lounge

Tools required: 9/16" ratchet

Note: These instructions are intended for various models and configurations. Your products may not look exactly as shown in the diagrams.

Important: The assembly process requires that some hardware be kept loose until later in the sequence. Follow these instructions closely to ensure correct assembly.

Recommendation: Retighten all bolts on a seasonal basis to ensure your product remains strong and stable for many years of use.

Weight Capacity: All loveseats in this series have a weight capacity of 600 lbs., sofas have a weight capacity of 700 lbs., and Bariatric 750 lbs. unless otherwise stated.

Parts List

Arm Frames, left & right
Seat Cushion
Back Cushion

Hardware Packs

3" Hex Bolts
Washers
7 pcs. each for Bariatric
8 pcs. each for Loveseat
9 pcs. each for Sofa

Panel Arm Bariatric, Loveseat & Sofa

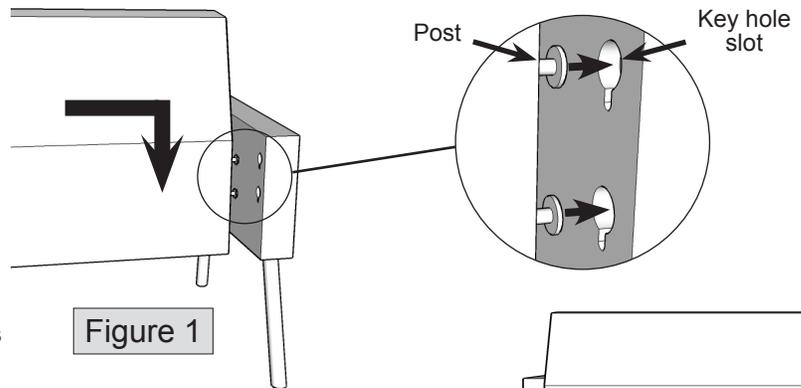


Figure 1

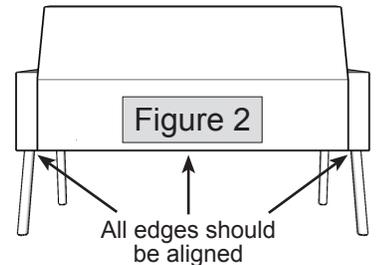


Figure 2

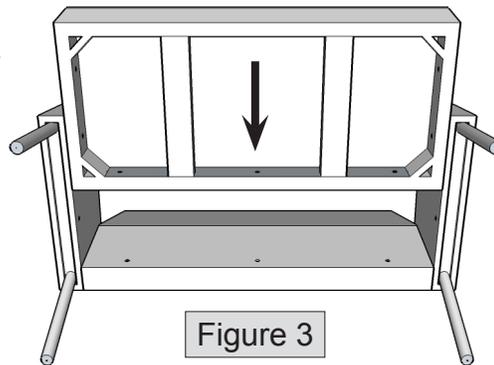


Figure 3

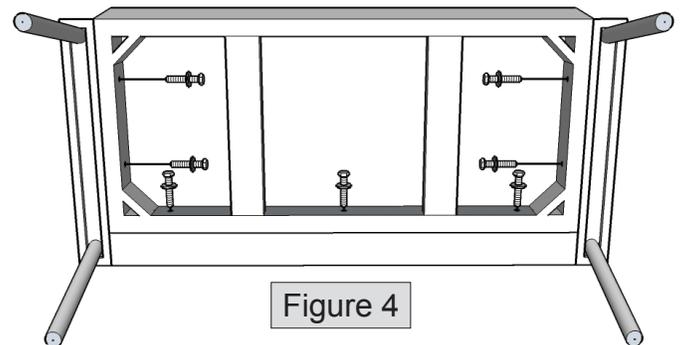


Figure 4

1. Unpack and identify all parts.
2. Attach back cushion to arm frame by inserting posts into key hole slots, as shown in figure 1. With posts fully inserted, press back cushion down until posts "bottom-out" in key hole slots.
3. **Important note:** Thicker fabrics might make it difficult to fully insert the posts into the key hole slots. If this problem occurs, you must press the back and arm pieces tightly together. This will compress the fabric and foam and enable the post head to drop deep enough into the key hole slot.
4. Attach second arm frame to back cushion by repeating step 2.
5. When properly connected, bottom edge of back cushion should align with bottom edges of arm frames as shown in figure 2.
6. Lay assembly on its back on a soft, clean surface and slide seat cushion into place, as shown in fig 3.
7. Attach seat cushion to back cushion and arm frames using 3" hex bolts and washers, as shown in figure 4. Keep all bolts slightly loose for now.
8. With all bolts connected but still loose, stand loveseat/sofa upright on a level surface. Align bottom edges of arm frames, back cushion and seat cushion, (similar to figure 2) and tighten all bolts securely.
9. Your product is now assembled and ready to use.

Thank you for purchasing a Lesro product.
Need assistance with assembly? Call Lesro customer service 1-800-275-7545.
Visit us online at www.lesro.com