


How to activate your new sound pattern using the **G1 RFID Tag**



Prior to completing the steps below your G1 SCBA MUST have Firmware Version 3.0 installed. Refer to the MSA G1 SCBA user manual for firmware update instructions.


G1 SCBA Tagging Process

The G1 Control Module allows the user to tag the SCBA while the unit is turned off.

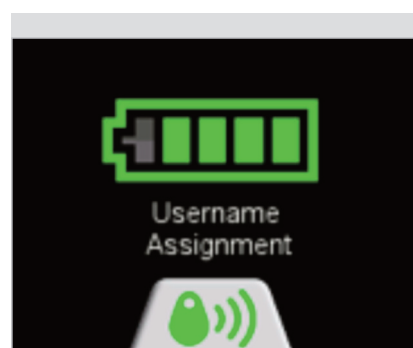


1

Press and hold the green RESET buttons until the battery icon displays.

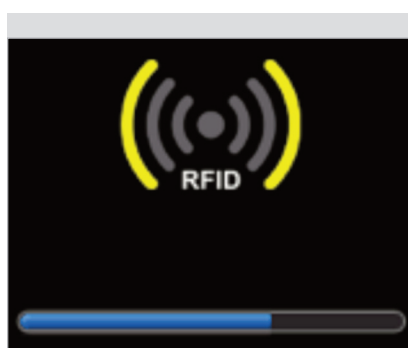


2

When the battery icon is displayed on the screen, press the red ALARM button and RFID symbol will appear.

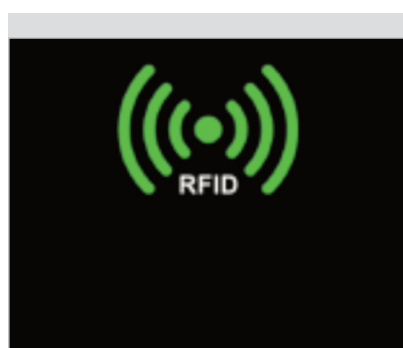


3

Place the G1 SCBA sound pattern tag on the user side of the back plate, on the right side of the power module. The control module will display a Green RFID symbol once complete.

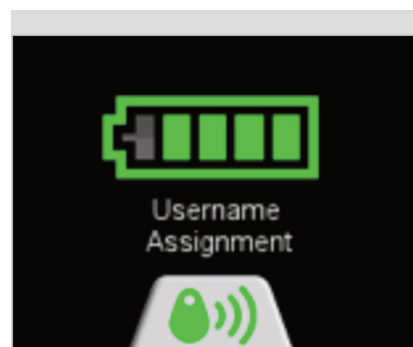

4

If the control module does not display a green RFID symbol, repeat steps 1 and 2.

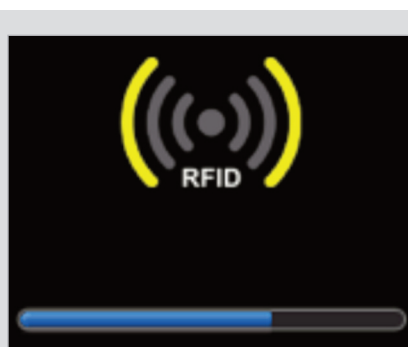

Verification and Labeling

5 Upon completion of the tagging process, allow the G1 SCBA to return to standby mode.

6 Hold down the red ALARM button until the G1 SCBA powers on.

7 Upon start up the unit will enter full alarm, allowing you to confirm installation has been complete. After confirmation, shut down your G1 SCBA by pressing the green RESET button twice.



Proper label placement

8 Apply TIA sound pattern label directly above the NFPA 1982 approvals label located on the back side of the power module.

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 0105-218-MC / December 2016
© MSA 2016 Printed in U.S.A.

MSA – The Safety Company
1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600
www.MSAFire.com

U.S. Customer Service Center
Phone 1-877-MSA-Fire
Fax 1-877-672-3930

MSA Canada
Phone 1-877-MSA-Fire
Fax 1-800-967-0398

MSA Mexico
Phone 1-877-672-3473
Fax 011 52 55 5359 4330