

## MSA DEFENDER VISOR HARDWARE KIT

### Contents

- 1 - Left Hand Quick-Disconnect
- 1 - Right Hand Quick-Disconnect
- 2 - Screw, Pan Head #6-32x3/8" long
- 2 - Nylon Lens Washer
- 2 - Metal Wave Spring Washer

### Tools Required


Torque screwdriver capable of reading inch-pounds

### Installing Hardware to Defender Visor

1. Turn the visor upside down, as shown, on a flat surface.
2. Attach one wave spring washer to the left hand Defender Quick-Disconnect.
3. Insert one pan head screw through the recessed side of the nylon washer.
4. Attach the left hand quick-disconnect assembly to the outer left side of the visor and attached it with the screw assembly. Tighten the screw to 5.5 in-lbs. with a torque screwdriver.

**NOTE:** The screw must be tightened to recommended torque settings to ensure the screw will not loosen during use.

Repeat steps 1 through 3 for the right side.

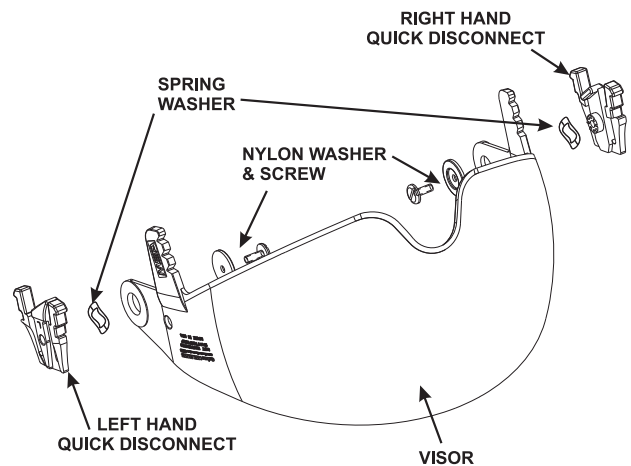

For More Information, call 1-877-673-3473 (FIRE) or Visit Our Website at [www.MSAafety.com](http://www.MSAafety.com)



**MINE SAFETY APPLIANCES COMPANY**  
CRANBERRY TWP., PENNSYLVANIA, U.S.A. 16066

© MSA 2012

Print Spec. 1000005196 (S) Mat. 10145811  
Doc. 10145811

## MSA DEFENDER VISOR HARDWARE KIT

### Contents

- 1 - Left Hand Quick-Disconnect
- 1 - Right Hand Quick-Disconnect
- 2 - Screw, Pan Head #6-32x3/8" long
- 2 - Nylon Lens Washer
- 2 - Metal Wave Spring Washer

### Tools Required


Torque screwdriver capable of reading inch-pounds

### Installing Hardware to Defender Visor

1. Turn the visor upside down, as shown, on a flat surface.
2. Attach one wave spring washer to the left hand Defender Quick-Disconnect.
3. Insert one pan head screw through the recessed side of the nylon washer.
4. Attach the left hand quick-disconnect assembly to the outer left side of the visor and attached it with the screw assembly. Tighten the screw to 5.5 in-lbs. with a torque screwdriver.

**NOTE:** The screw must be tightened to recommended torque settings to ensure the screw will not loosen during use.

Repeat steps 1 through 3 for the right side.

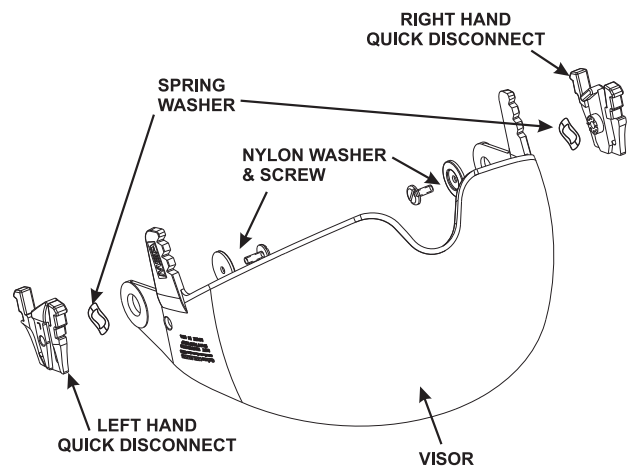

For More Information, call 1-877-673-3473 (FIRE) or Visit Our Website at [www.MSAafety.com](http://www.MSAafety.com)



**MINE SAFETY APPLIANCES COMPANY**  
CRANBERRY TWP., PENNSYLVANIA, U.S.A. 16066

MSA 2111 (L) Rev. 0

© MSA 2012

Print Spec. 1000005196 (S) Mat. 10145811  
Doc. 10145811