

MSA Rescuer



The MSA Rescuer provides fast, easy and intuitive fall protection with integral bi-directional retrieval capability. Not only does the MSA Rescuer arrest the fall, its retrieval capability allows the fallen worker to ascend or descend to a safe location. This durable, economical product offers fast installation and setup, ideal for applications where time and ease of use are a priority. The MSA Rescuer is also a stand-alone retractable device, as the carrying handle may be used as an anchorage attachment.

WE KNOW WHAT'S AT STAKE.

MSA Rescuer: Ease of Use, Many Applications

Exclusive integral bracket uses existing tripod pin, leaving fewer components to attach or become damaged or misplaced. Fall protection/retrieval mode knob simply pulls and rotates to activate. Use this device as a component of a confined space system for one application and as a standard self-retracting lanyard for another.

- Experienced and novice users will learn setup and operation quickly and effectively
- Comparable size and weight to competitive products
- Great for OGP turnarounds, construction, utilities, and other confined space applications
- QR code on product label offers instant access to setup video and additional information

Features & Benefits

The MSA Rescuer offers these standard features:


- User capacity up to 400 lbs. for personnel
- Stainless steel 3/16" wire rope
- Integral mounting bracket
- Color-coded switch for retrieval mechanism activation
- Ergonomic, stainless steel carrying handle can also be used as anchorage connection point
- Built-in shock absorber
- Robust aluminum housing with thermoplastic bumpers
- Self-locking swivel snaphook with load indicator
- Stow-able, foldable crank handle
- RFID-enabled
- Meets OSHA regulations, ANSI Z359.14 and CSA Z259.2.2

Specifications

- **Net weight**
16.3kg (includes bracket)
- **Crank handle material**
Carbon steel with zinc plating
- **Housing material**
Cast aluminum
- **Lifting and lowering gear ratio**
Gear ratio: 5:1
- **Maximum free fall distance**
2 ft. (0.6m)
- **Maximum deceleration distance**
54" (1.4m)
- **Maximum arresting force**
1800 lbs. (8Kn)

Ordering Information

P/N	Description
10158178	MSA Rescuer, stainless steel cable, 50 ft. (15m), ANSI
10158180	MSA Rescuer, stainless steel cable, 50 ft. (15m), CSA
10159755	MSA Rescuer, synthetic rope, 50 ft. (15m), ANSI

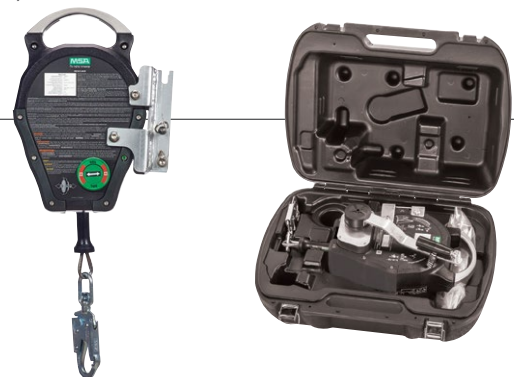

MSA Indonesia

Komplek Rukan Puri Mutiara
Jl. Griya Utama Blok BC 1 & 2, Sunter Agung
Jakarta Utara, DKI Jaya 14350
Indonesia

MSA S.E Asia Pte Ltd.(Representative office)

Room 2036 SPACES Phahon 19 Building
No.1687/1 Phahonyothin Road Lad Yao Sub-district
Chatuchak District Bangkok 10900 Thailand
Phone: +66 2038 8023
Fax: +66 2617 8214
Email: msa.thailand@MSAsafety.com

MSA Safety Malaysia Sdn Bhd

No.22, Jalan PPU 2A,
Taman Perindustrian Puchong Utama,
47100 Puchong,
Selangor, Malaysia
Phone: +603-9767 8800
Fax: +603-8051 8081
Email: msa malaysia@MSAsafety.com

MSA S.E. Asia Pte Ltd

35 Marsiling Industrial Estate Road 3
#04-01, Singapore 739257
Phone: +65 6350 4500
Fax: +65 6350 4505
Email: msa singapore@MSAsafety.com

MSA Philippines

Joy Nostalg Ortigas, Level 29
Joy Nostalg Centre,
17 ADB Avenue, Ortigas Center
Pasig City 1600, Manilla, Philippines
Phone: +63917 873 9138
Email: basil.see@msasafety.com

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit [MSAsafety.com/offices](https://www.msasafety.com/offices).