



# V-EDGE™ 6 m (20 ft.) Leading-Edge SRL



*Specifically engineered and tested for use at foot-level tie off, the V-EDGE SRL meets ANSI Z359.14-2014 and CSA Z259.2.2-2017 Leading-Edge requirements.*

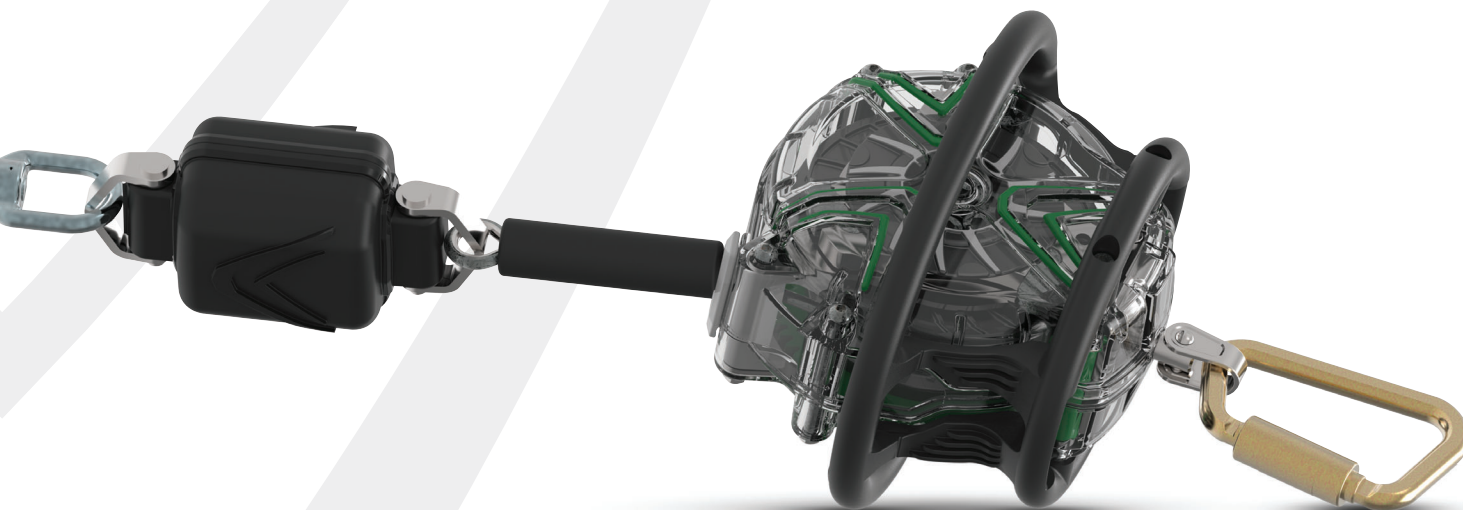


## Simplify Selection

Use in a variety of applications, from overhead to horizontal tie off points, and where sharp edges are a concern.



## Lower Cost of Ownership

Integrated roll cage protects housing when used in foot-level tie off. Retraction dampening feature controls the life line speed—preventing unwanted damage and maximizing product life.



## Get to Work Faster

Clear outer casing allows for quick visual inspection of internal components



## Reduce Downtime

Internal components like the cable and energy absorber can be replaced on site—reducing repair times.

## Ordering Information

Part Number	Line Length	Line Type	Anchorage Connection	Harness Connection	Standards		
					OSHA	ANSI	CSA
63406-00A	20 ft. (6 m)	Galvanized Cable	36CS Snaphook	Locking Pin	■	■	
63406-00ACA	20 ft. (6 m)	Galvanized Cable	36CS Snaphook	Locking Pin	■		■

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



**MSA – The Safety Company**  
1000 Cranberry Woods Drive  
Cranberry Township, PA 16066 USA  
Phone 724-776-8600  
[www.MSAafety.com](http://www.MSAafety.com)

**U.S. Customer Service Center**  
Phone 1-800-MSA-2222  
Fax 1-800-967-0398

**MSA Canada**  
Phone 1-800-672-2222  
Fax 1-800-967-0398

**MSA Mexico**  
Phone 01 800 672 7222