


V-SERIES™ Standard & Leading-Edge SRLs

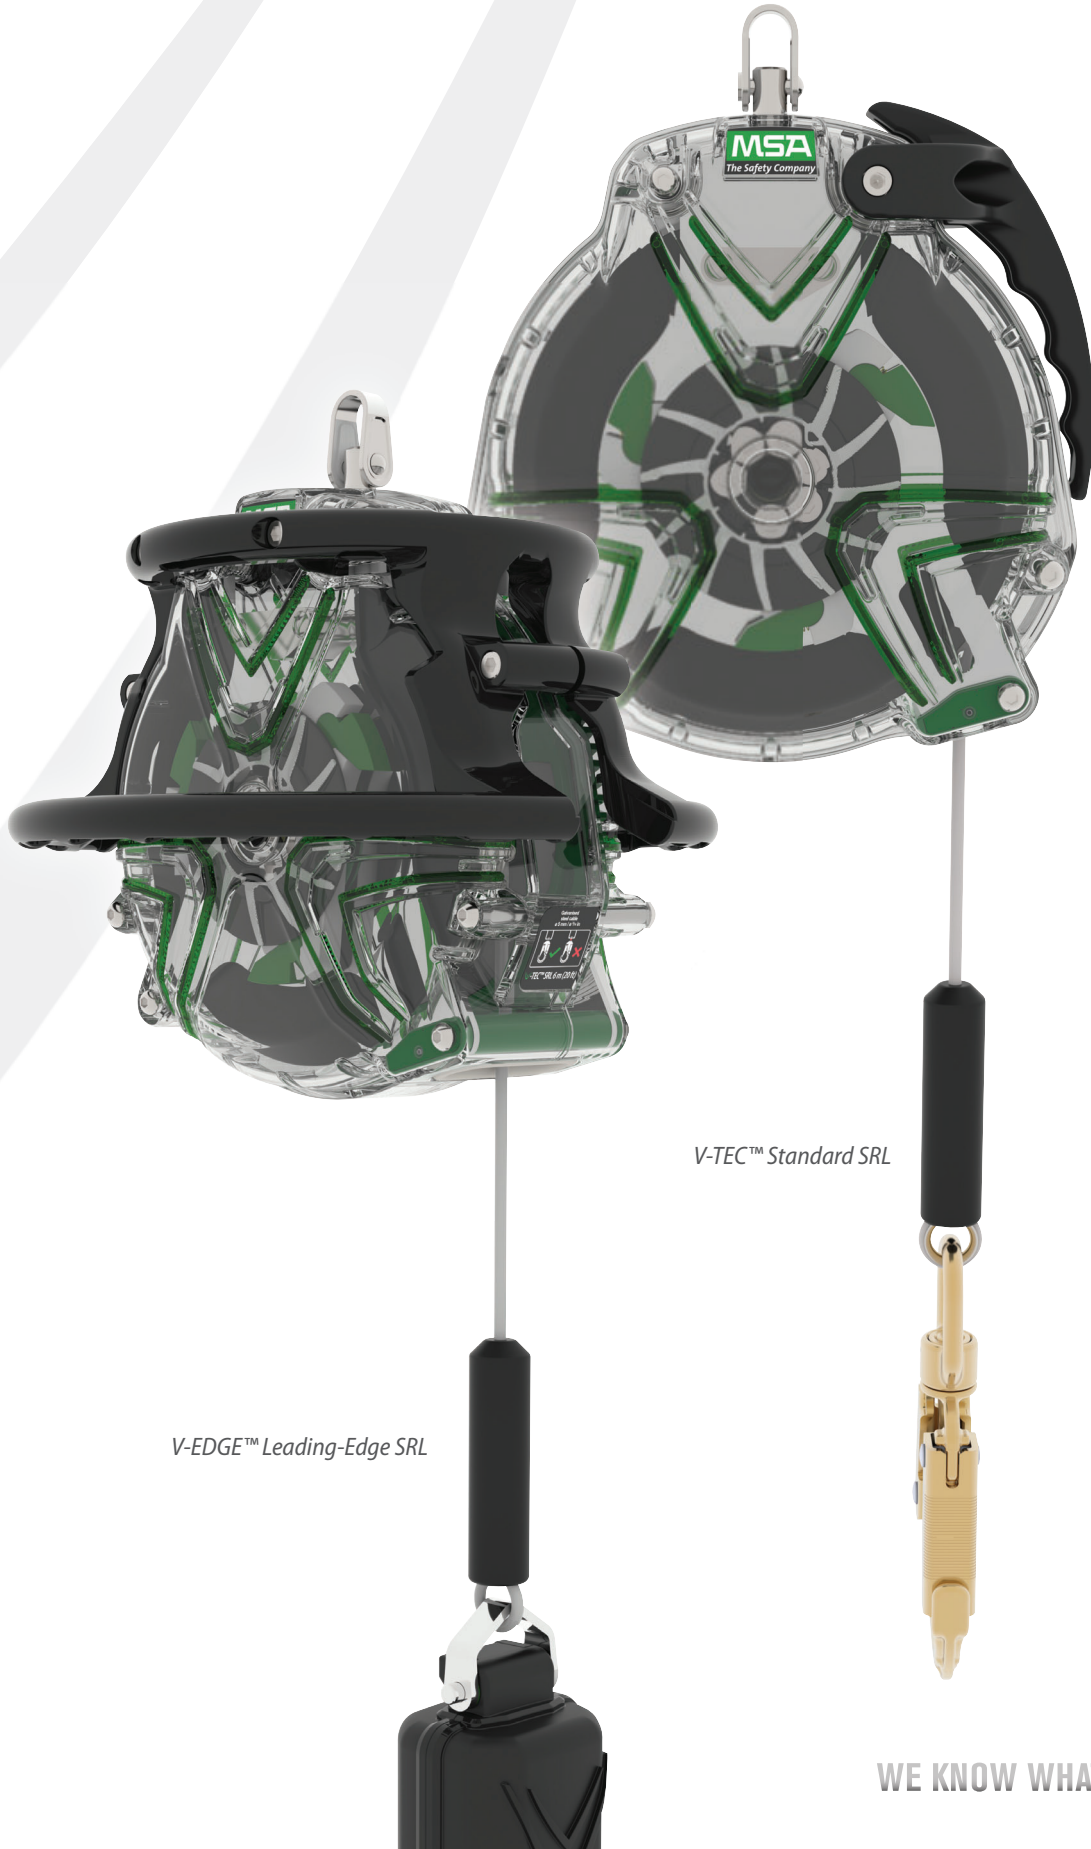


V-TEC™ Standard SRL

V-EDGE™ Leading-Edge SRL

WE KNOW WHAT'S AT STAKE.

V-TEC™ Standard SRLs

With premium components and innovative engineering, the V-TEC Standard SRL offers controlled cable retraction—preventing excessive lifeline retraction speed and protecting internal parts from damage.



Easy Inspection

Clear outer housing.




Easy Transportation

Carry handle included.



Assured Safety

Spiral radial energy-absorbing technology requires zero calibration or adjustment.




Downtime Minimized

Completely field-serviceable, the cable, energy-absorber, and retraction dampener can all be replaced on site.



Versatile

Galvanized or stainless steel cable.




Durable

Retraction dampening features control the cable speed to <10 ft./s (3 m/s).



Built to Last

Stainless steel/engineered plastics.

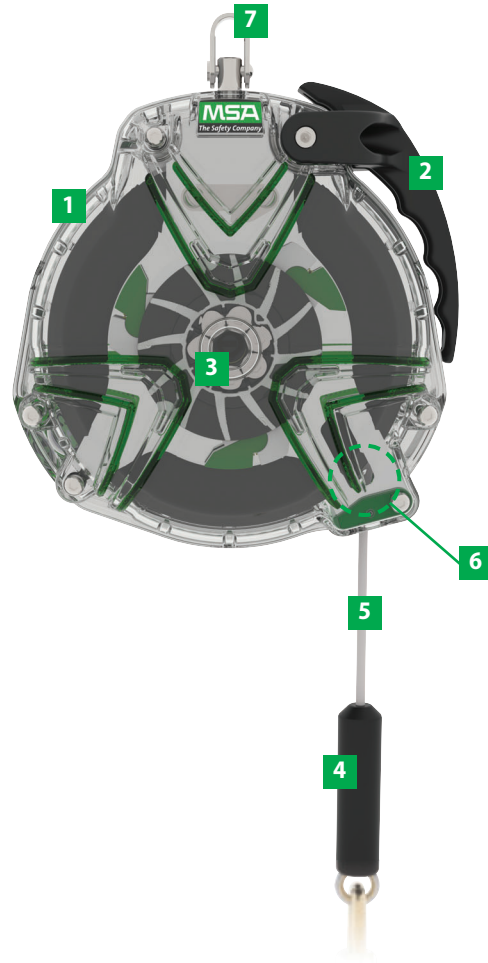

50 ft.
(15 m)




30 ft.
(10 m)



20 ft.
(6 m)

V-EDGE™ Leading-Edge SRLs

Specifically engineered and tested for use at foot-level tie off, the V-EDGE SRL meets ANSI Z359.14-2014 Leading-Edge requirements.



Simplify Selection

Use in a variety of applications, from overhead to horizontal tie off points, and where sharp edges are a concern.



Get to Work Faster

Clear outer casing allows for quick visual inspection of internal components




Lower Cost of Ownership

Integrated roll cage protects housing when used in foot-level tie off. Retraction dampening feature controls the life line speed—preventing unwanted damage and maximizing product life.



Reduce Downtime

Internal components like the cable and energy absorber can be replaced on site—reducing repair times.

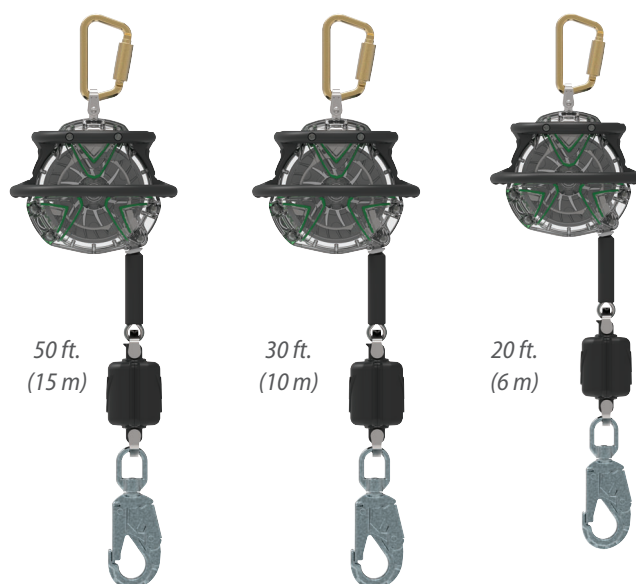

V-TEC Standard SRLs

Part Number	Description
63206-00A	V-TEC Standard Cable SRL, 20 ft. (6 m), galvanized cable, OSHA, ANSI
63306-00A	V-TEC Standard Cable SRL, 20 ft. (6 m), stainless steel cable, OSHA, ANSI
63206-00ACA	V-TEC Standard Cable SRL, 20 ft. (6 m), galvanized cable, OSHA, CSA
63306-00ACA	V-TEC Standard Cable SRL, 20 ft. (6 m), stainless steel cable, OSHA, CSA
63210-00A	V-TEC Standard Cable SRL, 30 ft. (10 m), galvanized cable, OSHA, ANSI
63310-00A	V-TEC Standard Cable SRL, 30 ft. (10 m), stainless steel cable, OSHA, ANSI
63215-00A	V-TEC Standard Cable SRL, 50 ft. (15 m), galvanized cable, OSHA, ANSI
63315-00A	V-TEC Standard Cable SRL, 50 ft. (15 m), stainless steel cable, OSHA, ANSI

V-EDGE Leading-Edge SRLs

Part Number	Description
63406-00A	V-EDGE Leading-Edge SRL, 20 ft. (6 m), galvanized cable, OSHA, ANSI
63406-00ACA	V-EDGE Leading-Edge SRL, 20 ft. (6 m), galvanized cable, OSHA, CSA
63410-00A	V-EDGE Leading-Edge SRL, 30 ft. (10 m), galvanized cable, OSHA, ANSI
63415-00A	V-EDGE Leading-Edge SRL, 50 ft. (15 m), galvanized cable, OSHA, ANSI

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



MSA – The Safety Company
1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600
www.MSAsafety.com

U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada
Phone 1-800-672-2222
Fax 1-800-967-0398

MSA Mexico
Phone 01 800 672 7222