


Chillgard® LE Monitor

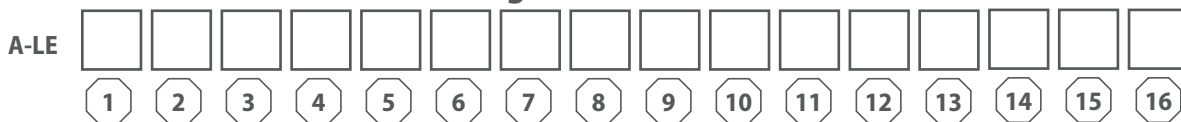

- 1 Gas Type**
 - A = R123
 - B = R11
 - C = R22
 - D = R134A
 - F = R12
 - G = R404A
 - H = R407C
 - J = R410A
 - K = R507
 - L = R-1234YF
 - Consult Factory for Custom Gas.....
- 2 Sample Points**
 - 1 = Single Point.....
 - 4 = Four Point
- 3 Sampling System**
 - 1 = Pump
- 4 Range of Analysis**
 - 0 = 0-1000 ppm
- 5 Alarm Options**
 - 0 = None
 - 1 = Beacon
- 6 Filter Selections**
 - 0 = None
 - 1 = Standard Filter.....
- 7 Quantity of Filters**
 - Must be zero if Code 6=None.....
 - Maximum Quantity = 4
- 8 Model Type**
 - 0 = Standard
- 9 Power Supply**
 - 0 = 24 VAC/DC (Standard)
 - 1 = 110/220 supply (50 – 60 Hz)
- 10 Enclosure**
 - 0 = Plastic
- 11 Approval Option**
 - 2 = cUL

- 12 Output Options**
 - 0 = Standard
- 13 Language**
 - 0 = English.....
- 14 Remote Display**
 - 0 = None
- 15 Audio Alarm**
 - 0 = Buzzer (standard – 85 DB)
 - 1 = 100 DB Horn
- 16 Custom Features**
 - 0 = None
 - C = Custom

Accessories

- 467895 0.25 LPM Regulator.....
- 603806 Polyurethane tubing.....
- 634674 Strobe.....
- 711561 End of line filter.....
- 10035292 Calibration Box.....
- 10098216 Remote Display, 110/220VAC
- 10098217 Remote Display 24V
- 10117875 Gateway, BACNET Output
- Chillgard L Series

