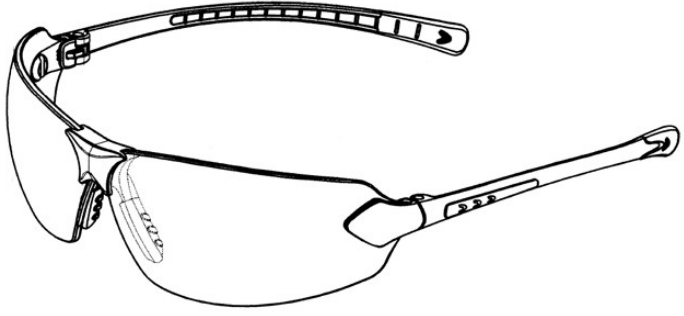


MSA DENE SAFETY SPECTACLES

GENERAL SPECIFICATIONS (mm)		
Lens thickness: 2.2mm		
PD: 68mm		
Lens Base: 9.5 curve		
Weight: 21gm		
Lens size vertical: 40mm		
Lens size diagonal: 73mm		
Bridge: 10.5mm		
Temple length (lens-tip): 157mm		
Overall Width (hinge-hinge): 138.5mm		
Closest point between lens: 11.5mm		
Closest point between temple tips: 79mm		
		
COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	9.5 base
Frame	N/A	Frameless
Side Shields	Polycarbonate	Integral to lens
Nose piece	Polycarbonate & PVC	Universal, snap on lens
Ratchet parts	Nylon	Length adjustable
Temple tip	Polycarbonate + TPR	Co-injection
Hinge	Nylon	3 Barrel Type, angle adjustable
Screw	Stainless Steel	Standard Hinge screw
LENS OPTIONS		
Lens options:	Anti-fog clear and grey lenses	
SPECIAL FEATURES		
<ul style="list-style-type: none"> ● Unique Rim-less design with incredible light weight ● Wraparound lens with integral side-shield ● Lightweight, optical class one, polycarbonate lens resists the high impact ● Angle adjustable temple with co-material design ● Soft nosepiece for comfortable fit ● Suitable for different work environments for all day wear ● Anti-fog polycarbonate lens provide 99.9% of UV protection 		
Meet or exceed	CE EN166 standards	