

HazardWatch[®] System

FM-Approved Fire & Gas Detection System



General Monitors



The Safety Company

WE KNOW WHAT'S AT STAKE.

State of the Art Fire & Gas Protection

Intelligent, Modular and Flexible

The General Monitors HazardWatch Integrated Fire and Gas Detection System represents the next generation in highly intelligent monitoring solutions designed to help customers reduce hazard vulnerability and meet the world's most demanding safety standards.

HazardWatch System is an innovative, modular system that is highly scalable and delivers:

- FM-approved for NFPA 72 compliance
- FM-approved proprietary central station monitoring
- FM-approved as both fire alarm panel and gas controller
- FM-approved fault-tolerant digital communications
- FM-approved releasing control panel
- FM-approved addressable detection loop for buildings
- FM-approved remote I/O capability
- Optional fiber optic communications
- Color touch screen operator interface
- Data and event logging
- Supports third party device integration
- Single and redundant processor options available
- Simple, reliable, and cost effective field wiring topology



Wall mounted NEMA 12 enclosure. Customer connections made at rail mounted "swing link" terminal blocks organized by input/output type.

PLC processor and touchscreen fitted with non-volatile memory.

HazardWatch System Overview

The HazardWatch System is designed with Rockwell Automation's industry proven Allen-Bradley ControlLogix™ programmable logic controller (PLC) technology and our advanced gas and flame detection field devices. Offering intelligence, flexibility, and reliability, the system's controller hardware configuration and software have been tested by Factory Mutual to verify NFPA (2013) 72 compliance.


The principal elements of the HazardWatch System include:

- Stand-alone local fire and gas alarm panel with touch screen operator interface
- Power supply and battery back-up to support the fire and gas system per NFPA 72
- Optional HazardNet dual media Ethernet (CAT 6 or fiber optic) fault-tolerant communication network, which supports communication panels internal communication between the local gas and flame panels and the optional HazardWatch Central Station
- Optional computer-based HazardView Workstation (with AC-powered UPS) to provide FM-approved central station monitoring
- Scalable from small systems to large plants
- Link up to 15 local gas and fire alarm panels over a network up to 6.2 mi. (10 km) long
- Easy integration with third party auxiliary devices such as horns, beacons, and fire suppression systems
- FM-approved Modbus or Ethernet/IP system communications to DCS or ESD Systems
- HART® sensor communication support

The system's local and network communications equipment are based on Ethernet/IP and Device Level Ring, a widely used high-speed, industrially-hardened control and communication protocol.



A More Reliable Safety Solution

The HazardWatch System combines the proven expertise of the industry's leaders in safety and automation. Developed with our gas/flame detection and systems integration expertise, as well as the process control/automation expertise of Rockwell Automation, the HazardWatch System is a powerful and flexible total safety solution. You can count on HazardWatch to ensure the safety of your people, equipment, and facility.

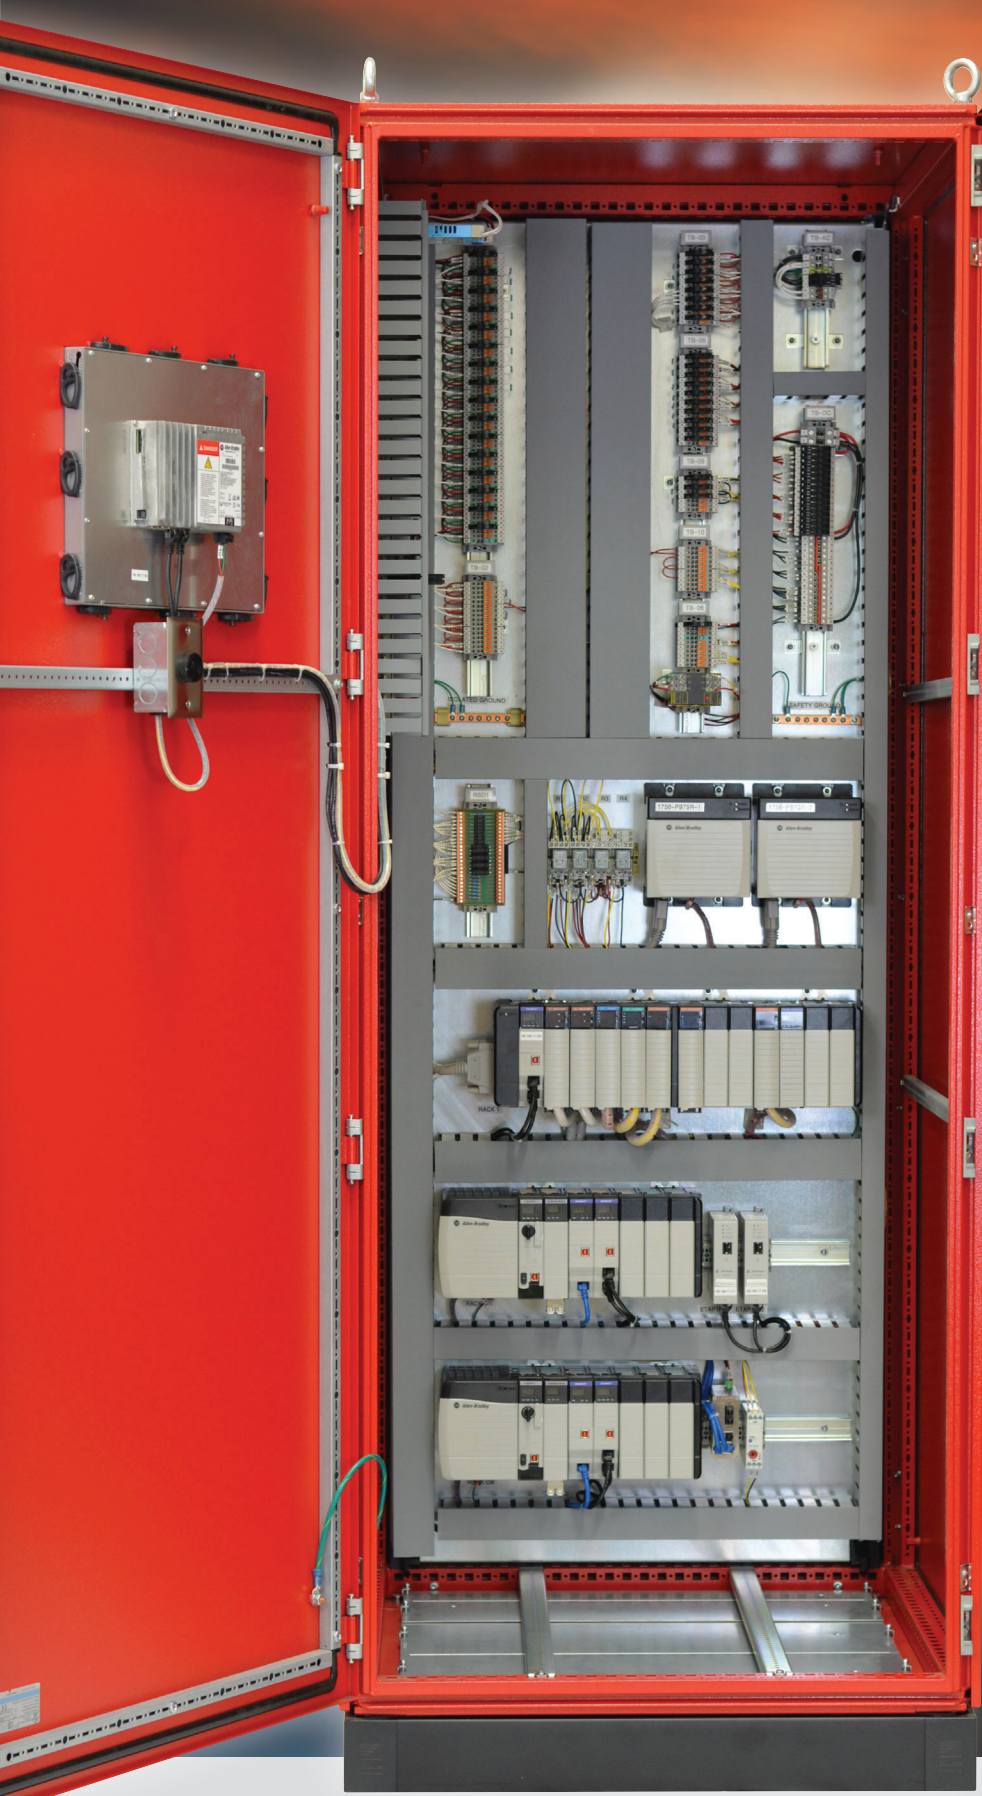

Features

- NFPA 72-compliant
- NFPA 72-compliant user-friendly touchscreen interface
- FM-approved
- Addressable loop for buildings
- ControlLogix™ PLC platform
- HazardNet communications
- TUV-approved SIL 2 version available





A Powerful,
Versatile Solution
with Design Flexibility

- Single rack
- Single processor, multiple I/O rack
- Dual processor, multiple I/O rack
- Single or dual processor, remote display and/or I/O racks

Modular Total Safety Solution

HazardNet Device Level Ring

Redundant Fault-Tolerant Communication

- Copper or fiber media
- Distances up to 6.2 mi. (10 km)
- 10/100 Mbit bandwidth

Fault Management for Device Level Ring Networks

Allen Bradley's Device Level Ring (DLR) modules provide fault-tolerant, self-healing communications through diagnostic monitoring of the communication. DLR uses ultra-high-speed detection and isolation of points of communication failure anywhere on the network. The DLR modules re-route around communication failures in ring network configuration. They automatically redirect network traffic around points of failure until the failure conditions are corrected and then system automatically restores the communication network to its original traffic pattern. Communication continuity is unconditionally maintained by the DLR fiber network in the event of either node or media failure. This feature enables maintenance personnel to splice/terminate/replace fiber media; add/delete nodes, etc. on-line without disrupting network communications from other panels or HMIs.

The DLR protocol is a layer 2 protocol that provides link-level, physical redundancy that provides network convergence in the 1 to 3 msec for simple automation device networks. The other resiliency protocols apply to infrastructure only (switches and routers). DLR provides resiliency directly to an end device directly (such as an I/O module, drive, or controller).



From distributed control to network communications, to control software, to operator interfaces to field devices, HazardWatch is the complete answer in a wide range of applications:

- Offshore Platforms
- Refineries and Pipelines
- Gas Compressor Stations
- Storage Facilities
- LNG Facilities
- CNG Fueling Terminals
- Tanker Loading/Unloading
- Chemical Plants
- Electric Power Plants
- Aircraft Maintenance Areas
- Aerospace Launch Facilities
- Automotive Plants

Advanced Flame and Gas Detectors



FL4000H MSIR Flame Detector

The FL4000H multi-spectral infrared (MSIR) flame detector provides superior false alarm immunity with the widest field of view utilizing neural network technology (NNT). Options include relays, Modbus, and HART.



FL500 UV/IR Flame Detector

The FL500 UV/IR optical flame detector offers high performance in a compact design with fast response times, increased false alarm immunity and wide field of view for reliable protection.



S5000 Gas Monitor*

The S5000 is a fixed gas transmitter which is ideal for extreme environments needing to detect oxygen, toxic and combustible gases. It operates over a wide temperature range using a variety of gas sensing technologies and can accommodate 2 sensors per transmitter.




S4000 Series Gas Detectors

The S4000 Series Gas Detectors feature a highly intelligent microprocessor-based design for the detection of combustible, and H₂S gas leaks. Options include relays, Modbus, and HART.



IR400 Hydrocarbon Gas Detector

The IR400 Infrared Point Detector features a fail-to-safe operation design to detect combustible gases within the lower explosive limit (LEL). No routine calibration is required, which reduces maintenance requirements. HART option available.

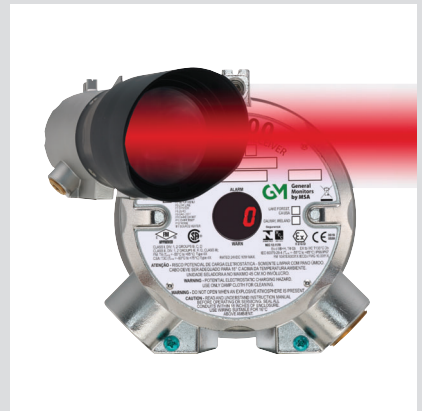

IR5500 Open Path Gas Detector

The IR5500's advanced single beam sensing technology ensures high accuracy to eliminate drift and false alarms. It is ideally suited for monitoring tank farms, gas spheres, fence lines and rows of valves or pumps.

* The Factory Mutual approval of gas controller and fire alarm functionality of HazardWatch is based on using FM-approved versions of our flame and gas detectors with the system. Non-FM-approved flame and gas detectors may be electrically compatible and suitable for use with the HazardWatch system, but they are not FM-approved for use with the system.



ULTIMA® X5000 Gas Monitor*

The Ultima X5000 gas monitor features an advanced OLED display with touch controls, two sensor inputs, and MSA's patented XCell® sensors with TruCal® technology.



ULTIMA XE Gas Monitor

The Ultima XE Gas Monitor is designed to provide continuous monitoring of many hazardous gases. DuraSource Technology offers extended sensor life, while HART provides convenient setup, calibration, and diagnostics.



ULTIMA® XIR Gas Monitor

The microprocessor-based, infrared Ultima XIR gas detector is precisely engineered to continuously monitor for combustible gases and vapors. The unit features DuraSource™ Technology, which offers improved IR life, and a HART port for easy output access.



Senscient ELDS Open Path Gas Detector*

The Senscient ELDS laser-based open path gas detector is gas-specific for a number of toxic and flammable gases. Nuisance false alarms caused by weather are virtually eliminated with its breakthrough Harmonic Fingerprint processing.



Senscient ELDS Methane Specific Open Path Detector

The Senscient ELDS methane open path gas detector is FM performance approved for use in hazardous areas. It protects plants from the risk of explosion by detecting methane leaks faster and over a larger area.





Ultrasonic Gas Leak Detectors

Ultrasonic gas leak detectors offer fast detection of high pressure gas leaks without requiring the gas to come into contact with the detector. They are ideally suited for outdoor installations.

Gas and Flame Mapping

For fire and gas systems to be effective, it is important that they offer a high likelihood of detecting the presence of any flame and gas hazards within monitored process areas. Determining the optimal quantity and location of flame and gas detectors is therefore critical to ensure the detection system's effectiveness.

MSA flame and gas mapping is a solution that assists in the evaluation of flame and gas risks. Mapping includes placing of gas and flame detectors in appropriate locations to achieve the best possible detection coverage. Through design iterations, the effects of different detector arrangements on detection coverage are quantified and assessed, stopping when the desired performance target is met.

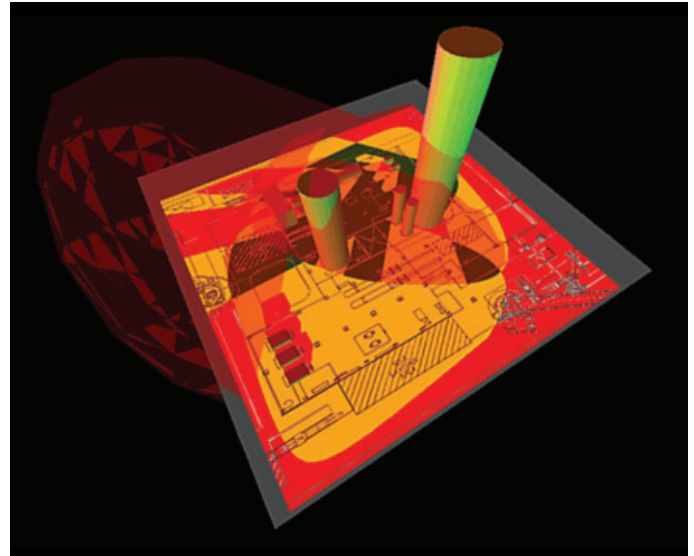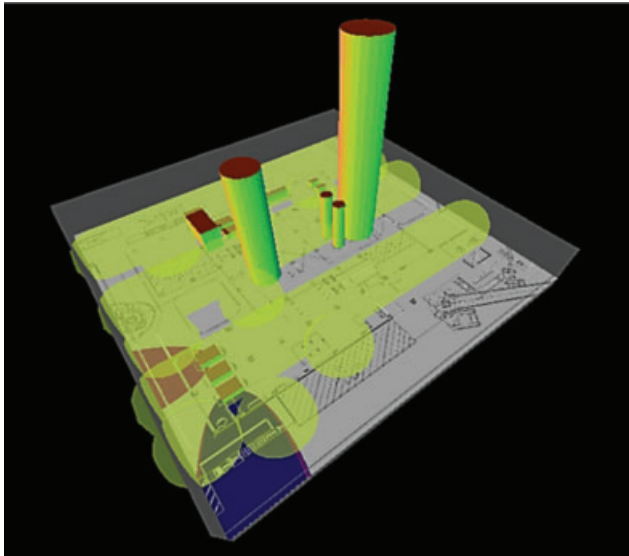

Our Mission

MSA's mission is to see to it that men and women may work in safety and that they, their families and their communities may live in health throughout the world.

MSA: WE KNOW WHAT'S AT STAKE.

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products. Specifications subject to change without notice.

ID 1471-04-MC / December 2018
© MSA 2018

Corporate Headquarters:
MSA – The Safety Company
1000 Cranberry Woods Drive
Cranberry Township, PA 16066
United States
+1-724-776-8600
info.us@MSAsafety.com

Design Center:
General Monitors
26776 Simpatica Circle
Lake Forest, CA 92630
United States
+1-949-581-4464
info.gm@MSAsafety.com

Additional locations can be found on our web site:
www.MSAsafety.com