

Gravity[®] Utility Harness

Full Body Harness – Arc Flash Hazards



*Because every life has a **purpose...***


The Gravity Utility Harness is a versatile full-body harness that can be used in a diverse number of applications like Confined Space, Rescue, Transmission Tower, Telecom Tower, Rope Access, and many others. This harness is suitable for electrical environments and is also tested for arc flash, meeting all requirements of the ASTM F887 standard.

Features & Benefits

- Waist and leg padding with flame-resistant fabrics using aramid fibers like Kevlar*
- Reflective tape is flame-retardant-treated cotton fabric
- PVC-coated buckles and D-rings
- Buckles are easy to adjust and do not slip during use
- Nylon web meeting the minimum static strength of 7000 lbf (as per the requirement by ASTM F887)
- Built-in load indicators
- RFID capability
- 400lbs. worker capacity
- Meets requirements of ANSI Z359.11
- Meets requirements of CSA Z259.10


Attachment Options

- Sternal – Fall arrest, suspension, positioning
- Dorsal – Fall arrest, suspension, positioning, restraint
- Shoulder Loops – Suspension, confined space entry, rescue
- Ventral – Suspension
- Waist Loops – Positioning, restraint

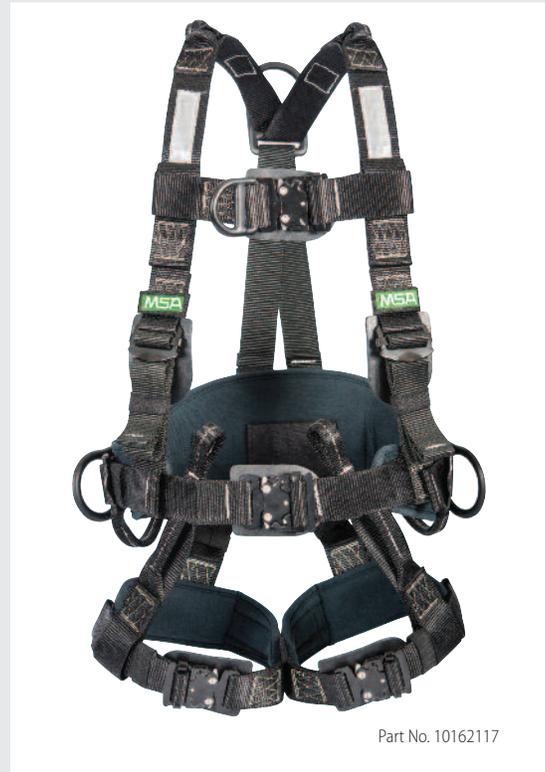

Part No. 10162117

FRONT

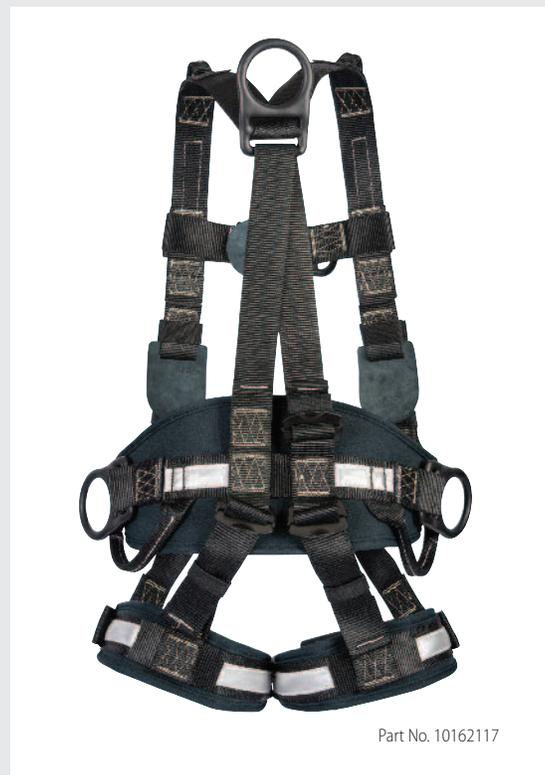

Part No. 10162117

BACK

| Gravity Utility Sizing Chart | |
|------------------------------|----------------|
| 2 (6' 5") | |
| 1.95 (6' 4") | |
| 1.9 (6' 2") | |
| 1.85 (6' 0") | |
| 1.8 (5' 10") | |
| 1.75 (5' 8") | |
| 1.7 (5' 6") | |
| 1.65 (5' 4") | |
| 1.6 (5' 2") | |
| 1.55 (5' 0") | |
| 1.5 (4' 10") | |
| | 50 (110) |
| | 60 (132) |
| | 70 (154) |
| | 80 (176) |
| | 90 (198) |
| | 100 (220) |
| | 110 (242) |
| | 120 (264) |
| | 130 (286) |
| | 140 (308) |
| | Weight KG (lb) |

* Kevlar is the registered trademark of Dupont™



| PART NO. | PVC-Coated D-Ring Configuration | Size | | | Leg Buckle Type | Padding | Accessories | | | Standards | | |
|----------|---------------------------------|-------|--------|-------|-----------------|-------------|--------------------|---------------------|--------------|-------------|-------------|-----------|
| | Back, Hips, Chest | Small | Medium | Large | Quick-Connect | Leg & Waist | Leather Insulators | Reflective Striping | Rescue Loops | ANSI Z359.1 | CSA Z259.10 | ASTM F887 |
| 10162117 | ■ | ■ | | | ■ | ■ | ■ | ■ | ■ | ■ | | ■ |
| 10162118 | ■ | | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | | ■ |
| 10162119 | ■ | | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | | ■ |

ArcSafe® and Thermatek® Energy-Absorbing Lanyards

ArcSafe Energy-Absorbing Lanyard Ordering Information

| PART NO. | Harness Connection | Anchorage Connection | Type | | | Material | Standards | | |
|------------|--------------------|----------------------|------------|------------|----------|----------|--------------|-------------|------|
| | | | Adjustable | Single-Leg | Twin-Leg | | ANSI Z359.13 | CSA Z259.11 | OSHA |
| 1 10107200 | Hitch Loop | 36C | ■ | ■ | | ■ | ■ | | ■ |
| 1 10107201 | Hitch Loop | (2) 36C | ■ | | ■ | ■ | ■ | | ■ |
| 1 10060139 | Hitch Loop | 36C | ■ | ■ | | ■ | | ■ | ■ |
| 1 10060140 | Hitch Loop | (2) 36C | ■ | | ■ | ■ | | ■ | ■ |



Part No. 10107200



Part No. 10107201



Part No. 10118737



Part No. 10118738



Part No. 10106935

Thermatek Web Energy-Absorbing Lanyard Ordering Information

| PART NO. | Harness Connection | Anchorage Connection | Type | | | Length | Standards | | | |
|------------|--------------------|----------------------|-------|------------|----------|--------|--------------|------------------|------------------|-----------|
| | | | Fixed | Single-Leg | Twin-Leg | | ANSI Z359.13 | CSA Z259.11 (E4) | CSA Z259.11 (E6) | ASTM F887 |
| 2 10106935 | 36C | 36C | ■ | ■ | | ■ | ■ | | | ■ |
| 10118737 | 36C | 36CL | ■ | ■ | | ■ | ■ | | | ■ |
| 10107853 | 36C | (2) 36C | ■ | | ■ | ■ | ■ | | | ■ |
| 2 10118738 | 36C | (2) 36CL | ■ | | ■ | ■ | ■ | | | ■ |
| 2 10156246 | 36C | 36C | ■ | ■ | | ■ | | ■ | | ■ |
| 10156248 | 36C | 36CL | ■ | ■ | | ■ | | ■ | | ■ |
| 10156250 | 36C | 36C | ■ | ■ | | ■ | | | ■ | ■ |
| 10156252 | 36C | 36CL | ■ | ■ | | ■ | | | ■ | ■ |
| 10156247 | 36C | (2) 36C | ■ | | ■ | ■ | | ■ | | ■ |
| 2 10156249 | 36C | (2) 36CL | ■ | | ■ | ■ | | ■ | | ■ |
| 10156251 | 36C | (2) 36C | ■ | | ■ | ■ | | | ■ | ■ |
| 10156253 | 36C | (2) 36CL | ■ | | ■ | ■ | | | ■ | ■ |



- 1 denotes Tier I product status (same day or next-day shipping) with a maximum order quantity of 100 units for priority shipping.
- 2 denotes Tier II product status (shipping within 5 days) with a maximum order quantity of 50 units for priority shipping.

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 2302-91-MC / July 2015

© MSA 2015 Printed in U.S.A.
Subject to changes without notice

MSA – The Safety Company
1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600
www.MSAafety.com
U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

Pacific Asia Region
MSA Singapore
MSA S.E. Asia Pte Ltd
35 Marsiling Industrial Estate Road 3,
#04-01, Singapore 739257
Phone: +65 6350 4500
Fax: +65 6350 4505

MSA Australia
Phone: 1300 728 672 / +61 02 9688 0333
Fax: +61 2 9896 1835

MSA Indonesia
Phone: +62 21 6409 000
Fax: +62 21 641 2831

MSA Malaysia
Phone: +603 8724 8208/9208
Fax: +603 8724 2208

MSA New Zealand
Customer Service
Phone: 0800 441 335

MSA Philippines
Phone: +63 9209 742 191

MSA Thailand
Phone: +66 2617 8211
Fax: +66 2617 8214

For sales enquiry, contact us [here](http://www.MSAafety.com).

www.MSAafety.com