# Workman® Confined Space Entry Kit



















### Durable

A tripod needs to hold up well under use, and the Workman Tripod does. Built for durability, the unit features:

- Skid-resistant feet with built-in leg base support strap that improves stability and strengthens entire system.
- Cut-resistant pin retention chains that enable extended service life.
- Internal leg-locking mechanism prevents accidental disengagement during use and reduces possibility of damage to mechanism during use or while in storage.

#### Versatile

If ease-of-use and durability aren't enough, the Workman Tripod offers great versatility:

- Leg base support strap also serves as convenient carry strap.
- Tripod legs feature 4" incremental adjustments with easy-to-insert ball detent pins.
- Unit is backwards-compatible with Lynx® Hoist and Lynx Rescuer; no need to purchase new equipment or undergo costly upgrades.
- Unit is backwards-compatible with Workman Winch, Lynx® Hoist and Lynx Rescuer; no need to purchase new equipment or undergo costly upgrades.






#### Workman Winch

The Workman Winch is rugged, versatile and economical for lifting, lowering and positioning of personnel and materials within confined space applications. Designed for maximum 400-lb workload for personnel and 620-lb for materials (20:1 design factor), the Workman Winch is built with tough thermoplastic housing to ensure high performance within the harshest environments. Winch offers integral, ergonomic carry grip and unique, foldable handle for simple storage. Patent-pending bracket design allows for easy, rapid assembly.

- Maximum work load of 400 lbs for personnel, 620 lbs for materials
- Patent-pending bracket attachment for easy installation
- · Ergonomic carry grip
- · Foldable crank handle
- Includes integral RFID technology
- Includes self-locking swivel 36C snaphook
- · ANSI Z359.1-compliant



WORKMAN WINCH	10147301	Workman Winch, stainless steel cable, 65-ft (20 m)
	10153757	Workman Winch, galvanized cable, 65-ft (20m)

#### Lynx Hoist

A rugged, versatile and economical hoist for lifting, lowering and positioning of personnel and materials in confined space applications. Designed for a maximum workload of 310 lbs for personnel (10:1 design factor) and 620 lbs for materials (5:1 design factor), the Lynx Hoist for personnel provides all steel construction with energy absorber that operates even when usable length of line is fully extracted. Each unit offers galvanized or stainless steel wire rope line with self-locking swivel snaphook. **Optional air drive adapter enables powered lifting and lowering with separate air-powered drive assembly.** 

- · Designed for lifting, lowering and positioning of personnel and materials
- Maximum work load of 310 lbs for personnel, 620 lbs for materials
- Anti-backlash crank handle with lifting/lowering speed of 25 ft per minute
- Integral shock absorber
- · Load-limiting clutch prevents overloading of hoist
- Emergency drive allows manual bypass of load-limiting clutch for extra lifting capacity in an emergency
- · Air drive adapter enables powered lifting/lowering with optional air-powered drive assembly
- Includes galvanized or stainless steel wire rope line with self-locking swivel snaphook
- Primary gear backed up by two independent secondary brakes



LYNX HOISTS	10016569	Side mount with emergency air drive adapter*, galvanized wire rope, 50-ft (16m)
	10016568	Side mount with emergency air drive adapter*, galvanized wire rope, 105-ft (32m)
	10016567	Side mount with emergency air drive adapter*, stainless steel wire rope, 50-ft (16m)
	10016566	Side mount with emergency air drive adapter*, stainless steel wire rope, 105-ft (32m)
	506420	Lynx Hoist air drive assembly

<sup>\*</sup> Air drive assembly must be purchased separately (P/N 506420)


# Workman Confined Space Entry Kits

MSA tripods make confined space entry with vertical descent easy. The Workman Tripod features internal leg-locking mechanism, maximum height indicator on tripod legs, cut-resistant leg pin retention chains, recessed product labels, reduced weight and integral carry strap. The Workman Tripod can be set up and dismantled without use of tools.

- · Automatic hinge lock legs with incremental adjustment
- · Skid-resistant feet

## Confined Space Entry Kit with Workman Winch and Lynx Rescuer

#### P/N 10153101

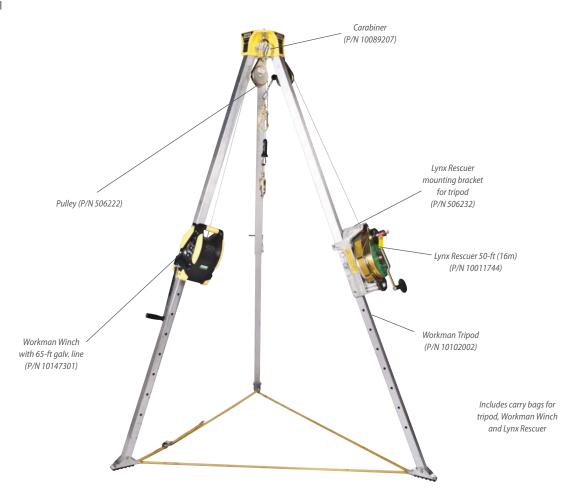

CONFINED SPACE	10153101	Workman Tripod, 65-ft (20 m) winch, stainless steel cable, 50-ft (16 m) Lynx Rescuer, ANSI
ENTRY KITS	10153102	Workman Tripod, 65-ft (20 m) winch, stainless steel cable, 50-ft (16 m) Dynevac® II Rescuer, ANSI
	10153141	Workman Tripod, 65-ft (20 m) winch, stainless steel cable, 50-ft (16 m) Lynx Rescuer, CSA
	10153142	Workman Tripod, 65-ft (20 m) winch, stainless steel cable, 50-ft (16 m) Dynevac II Rescuer, CSA
	10153723	Workman Tripod, 65-ft (20 m) winch, galvanized cable, 50-ft (16 m) Lynx Rescuer, ANSI
	10153724	Workman Tripod, 65-ft (20 m) winch, galvanized cable, 50-ft (16 m) Dynevac II, ANSI
	10153725	Workman Tripod, 65-ft (20 m) winch, galvanized cable, 50-ft (16 m) Lynx Rescuer, CSA
	10153726	Workman Tripod, 65-ft (20 m) winch, galvanized cable, 50-ft (16 m) Dynevac II, CSA




Complete confined space entry kits are designed for multiple confined space applications. Kits feature four tripod kits.

- Kits provide non-entry rescue of confined space entrant and great portability.
- Kits allow for lifting and lowering of materials and personnel via winch or hoist.
- Kits allow for use of SRL.

## Confined Space Entry Kit with Lynx Hoist and Rescuer

#### P/N 10105271

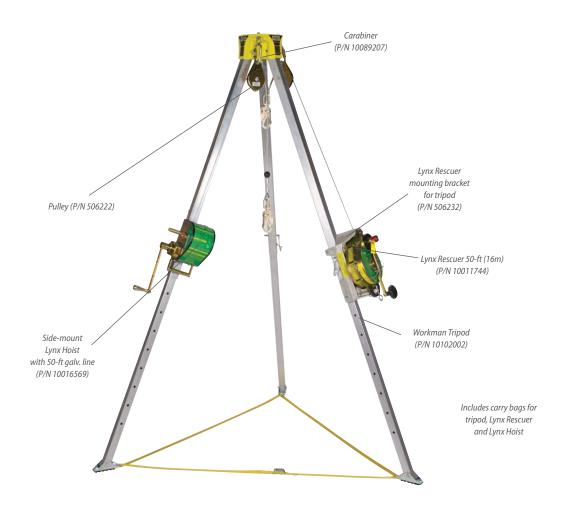

CONFINED SPACE ENTRY KITS		Confined Space Entry Kit with Dynevac II Rescuer, 50-ft (16 m)
	10125298	Confined Space Entry Kit with Dynevac II Rescuer, 95-ft (29 m)
	10105271	Confined Space Entry Kit with Lynx Hoist and Lynx Rescuer, 50-ft (16 m)
	10115109	Confined Space Entry Kit with Lynx Hoist and Lynx Rescuer, CSA version, 50-ft (16 m)
	10117244	Confined Space Entry Kit with Lynx Rescuer, 50-ft (16 m)
	10115110	Confined Space Entry Kit with Lynx Rescuer, CSA version, 50-ft (16 m)



### Replacement Parts & Accessories

REPLACEMENT PARTS & ACCESSORIES	10102002	Workman Tripod
	10105612	Leg base support strap
	10089207	Carabiner
	506222	Pulley
	10011744	Lynx Rescuer 50-ft (16 m)
	506232	Lynx Rescuer mounting bracket for 50-ft (16 m)
	506216	Lynx Rescuer mounting bracket for 95-ft (29 m)
	10105656	Tripod duffel bag
	507151	Lynx Hoist carry bag

# Technical Specs for Workman Tripod

MAXIMUM HEIGHT	96" to top of tripod head		
OF TRIPOD	91" under tripod head		
01 11til 0D	of ander tripod field		
WEIGHT	45 lbs (20 kg)		
FOOT (SHOE)	Clear chromate zinc-plated steel with skid-resistant rubber tread		
APPROVALS	ANSI Z359.1, EN 795 and OSHA regulations		
MATERIAL			
HEAD	Aluminum alloy		
LEG	High-tensile aluminum alloy		
LEG	nigh-tensile alunihum alloy		
MAXIMUM PERSONNEL	400 lbs (182 kg)		
CAPACITY	100 lbs (102 lbg)		
CAPACITY			
MAXIMUM MATERIAL	620 lbs (280 kg)		
CAPACITY	626 lbs (256 lkg)		
CAPACITY			
MINIMUM VERTICAL	5,000 lbs (22.0 kN)		
STATIC STRENGTH	5/656 165 (22.6 16.1)		
STATIC STRENGTH			

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.

ID 2301-89-MC / September 2013 © MSA 2013 Printed in U.S.A.

MSA Corporate Center 1000 Cranberry Woods Drive Cranberry Township, PA 16066 USA Phone 724-776-8600 www.MSAsafety.com

**U.S. Customer Service Center** 1-800-MSA-2222 Phone 1-800-967-0398 Fax

MSA Canada 1-800-672-2222 1-800-967-0398 Fax

MSA Mexico 01 800 672 7222 Phone

Toll Free

52 - 44 2227 3943 MSA International Phone 724-776-8626 1-800-672-7777

724-741-1559 Email msa. international @msasa fety.com Offices and representatives worldwide

For further information: