


Mega Swivel 5K and 10K Steel and concrete Anchorage Connectors

Product Specifications

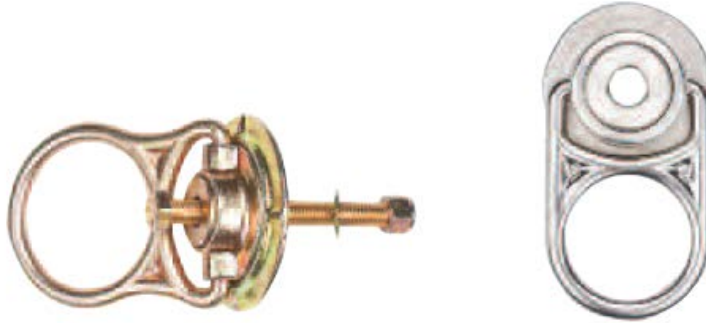

| MATERIALS | |
|--------------------|---------------------|
| 5K Mega Swivel | Zinc-plated steel |
| 5K SST Mega Swivel | 316 stainless steel |
| 10K Mega Swivel | Zinc-plated steel |

| FALL ARREST SYSTEM | |
|---------------------------|---|
| Rotation | Shall have a 360 degree rotation |
| Flip | Shall be able to flip 180 degrees |
| Maximum Capacity | Anchorage to which personal fall arrest equipment is attached shall be capable of supporting at least 5,000 pounds (22.2kN) per user attached, or shall be designed, installed and used as part of a complete personal fall arrest system that maintains a safety factor of at least two under the supervision of a qualified person. |
| Fall arrest forces | Must not exceed 1,800 lbs (8kN) |
| Free fall distance | Must not exceed 6.0 ft (1.8m) in accordance with OSHA and ANSI Z359.1 |

| APPROVALS | |
|--------------------|---|
| 5K Mega Swivel | ANSI Z359.1 (5,000 lbs / 22kN), OSHA 1910.66 |
| 5K SST Mega Swivel | ANSI Z359.1 (5,000 lbs / 22kN), OSHA 1910.66 |
| 10K Mega Swivel | ANSI Z359.1 (10,000 lbs / 44kN), OSHA 1910.66 |

| ATTACHMENTS |
|--|
| When used as part of a personal fall arrest system, no more than one personal fall arrest system may be attached to the Anchorage Connector. |

| APPLICATIONS |
|-------------------------------------|
| Steel flanges or concrete substrate |