



Operating Manual

AirGo

Compressed Air Breathing Apparatus - Modular Basic Apparatus

α *alpha series*
make sense technology



Order No.: 10082058/06



The Safety Company

MSA Europe GmbH
Schlüsselstrasse 12
8645 Rapperswil-Jona
Switzerland

Product of Germany

Contents

1.	Safety Regulations	6
1.1.	Correct Use	6
1.2.	Liability Information	6
2.	Description.....	7
2.1.	Harness	10
2.2.	Back Plate	12
2.3.	Pneumatic System	13
2.3.1.	Pressure Reducer	13
2.3.2.	SingleLine Pneumatics	14
2.3.3.	Manifold	14
2.3.4.	SingleLine SCOUT.....	14
2.3.4.1.	Option – Q – with Quick-Fill Coupling	15
2.3.4.2.	Option – 3C/3N – with Additional Connections for Medium Pressure.....	16
2.3.4.3.	Option – C3 – with Coupling System <i>alphaCLICK 2</i>	17
2.3.4.4.	Option – M – with <i>alphaMITTER</i> (short distance transmitter).....	19
2.3.5.	classic Pneumatics	20
2.3.5.1.	Option – S – with Signal Line	21
2.3.5.2.	Option – Z – with Second Medium Pressure Line	22
2.3.5.3.	Option – Y – with Second Medium Pressure Line	23
2.3.5.4.	Option – ICU/ICS – Integrated Control Unit (with or without key).....	24
2.3.5.5.	Option – C3 – with Coupling System <i>alphaCLICK 2</i>	24
2.3.5.6.	Option – M – with <i>alphaMITTER</i> (short distance transmitter).....	24
2.3.6.	Fix Pneumatics	25
2.3.6.1.	Option – Z	25
2.3.6.2.	Option – N.....	25
2.3.6.3.	Option – AE.....	25
2.3.6.4.	Option – AS.....	25
3.	Using the Compressed Air Breathing Apparatus	26
3.1.	Prior to the First Use	26
3.2.	Connecting One Compressed Air Cylinder.....	26
3.2.1.	Pressure Reducer with Thread Connection	26
3.2.1.1.	Preparing the Apparatus for Use with One Compressed Air Cylinder.....	26
3.2.1.2.	Connecting One Compressed Air Cylinder	27
3.2.2.	Pressure Reducer with <i>alphaCLICK 2</i>	28
3.2.2.1.	Installing Quick Connect Adaptor to Cylinder.....	28
3.2.2.2.	Connecting One Compressed Air Cylinder	29
3.3.	Connecting Two Compressed Air Cylinders.....	31
3.3.1.	Pressure Reducer with Thread Connection	31

3.3.1.1.	Preparing the Apparatus for Use with Two Compressed Air Cylinders	31
3.3.1.2.	Connecting Two Compressed Air Cylinders	31
3.3.2.	Pressure Reducer with <i>alphaCLICK 2</i>	32
3.4.	Donning the Compressed Air Breathing Apparatus.....	33
3.5.	Condensed Check Prior to Use.....	33
3.6.	Donning the Full Face Mask.....	34
3.7.	During Use	34
3.8.	Use of Additional Connections for Medium Pressure	35
3.9.	Handling the Warning Device.....	35
3.10.	Filling with Quick-Fill	36
3.11.	Removing the Compressed Air Breathing Apparatus	36
3.12.	Removing the Compressed Air Cylinders.....	37
3.12.1.	Pressure Reducer with Thread Connection	37
3.12.2.	Pressure Reducer with <i>alphaCLICK 2</i>	37
4.	Maintenance and Care	39
4.1.	Maintenance Instructions	39
4.2.	Maintenance Intervals	40
4.3.	Cleaning	41
4.3.1.	Pre-cleaning.....	41
4.3.2.	Cleaning, Light Soiling	41
4.3.3.	Cleaning, Heavy Soiling.....	41
4.3.4.	Removing the Swivelling Plate.....	43
4.3.5.	Cleaning and disinfection of AutoMaXX on Fix pneumatics.....	44
4.4.	Changing the Straps and Belt	47
4.4.1.	Changing the Shoulder Straps.....	47
4.4.2.	Changing the Protection Tunnel	48
4.4.3.	Changing the Holder for Mask/Helmet Combination	49
4.4.4.	Removing the Rescue Grip.....	49
4.4.5.	Changing the Hip Belt.....	50
4.4.5.1.	Options MaX, eXX and pro with Swivelling Plate	50
4.4.5.2.	Option pro without Swivelling Plate.....	51
4.4.5.3.	Options com and mix	51
4.4.6.	Changing the Cylinder Strap.....	52
4.4.6.1.	Long Cylinder Strap	52
4.4.6.2.	Short Cylinder Strap.....	53
4.4.6.3.	alphaBELT und alphaFP	53
4.5.	Visual, Function and Tightness Check	54
4.6.	Checking the Warning Device	54
4.7.	Checking the High Pressure Gaskets	54
4.8.	Changing the Battery <i>alphaMITTER</i> / <i>alphaSCOUT</i> / <i>ICU</i>	54
4.9.	Overhaul.....	55

4.10.	Storage.....	55
4.11.	Malfunctions	55
5.	Compressed Air Cylinders with <i>alphaCLICK 2</i>.....	56
5.1.	Changing of Compressed Air Cylinders to <i>alphaCLICK 2</i>	56
5.2.	Filling of Compressed Air Cylinders with <i>alphaCLICK 2</i>	57
6.	Accessories	59
6.1.	Compressed Air Cylinders.....	59
6.2.	Lung Governed Demand Valves / Full Face Masks	59
7.	Technical Specifications and Certifications.....	60
8.	Notes for Ordering.....	62
9.	Ordering Information.....	63
9.1.	Compressed Air Breathing Apparatus	63
9.2.	Lung Governed Demand Valve	63
9.3.	Compressed Air Cylinders.....	64
9.4.	Accessories.....	65
9.5.	Work Shop Accessories	66

1. Safety Regulations

1.1. Correct Use

The MSA AirGo - referred to hereafter as compressed air breathing apparatus - is a self-contained breathing apparatus operating independent of the ambient air. The compressed air breathing apparatus is based on a modular structure which allows the creation and ordering of a unit matched to the specific requirements.

In combination with a certified facepiece (full face mask) the device protects the wearer against inhalation of hazardous substances and mixtures, harmful biological agents and oxygen deficiency.

Breathable air is supplied to the user from a (several) compressed air cylinder(s) via a pressure reducer, a demand controlled dosage assembly (→ Operating Manual for the Lung Governed Demand Valve) and a facepiece (→ Operating Manual for the Facepiece). The exhalation air is released directly into the ambient atmosphere.

It is imperative that this operating manual be read and observed when using the compressed air breathing apparatus. In particular, the safety instructions, as well as the information for the use and operation of the apparatus, must be carefully read and observed. Furthermore, the national regulations applicable in the user's country must be taken into account for a safe use.

Alternative use, or use outside these specifications will be considered as non-compliance. This also applies especially to unauthorised alterations to the apparatus and to commissioning work that has not been carried out by MSA or authorised persons.



Danger!

This product supports life and health. Inappropriate use, maintenance or servicing may affect the function of the device and thereby seriously compromise the user's life.

Before use, the product operability must be verified. The product must not be used, if the function test is unsuccessful, it is damaged, a competent servicing/maintenance has not been made, genuine MSA spare parts have not been used.



Danger!

This compressed air breathing apparatus is a pure gas protection device. It is not suitable for underwater diving.

1.2. Liability Information

MSA accepts no liability in cases where the product has been used inappropriately or not as intended. The selection and use of the product are the exclusive responsibility of the individual operator.

Product liability claims, warranties also as guarantees made by MSA with respect to the product are voided, if it is not used, serviced or maintained in accordance with the instructions in this manual.

2. Description

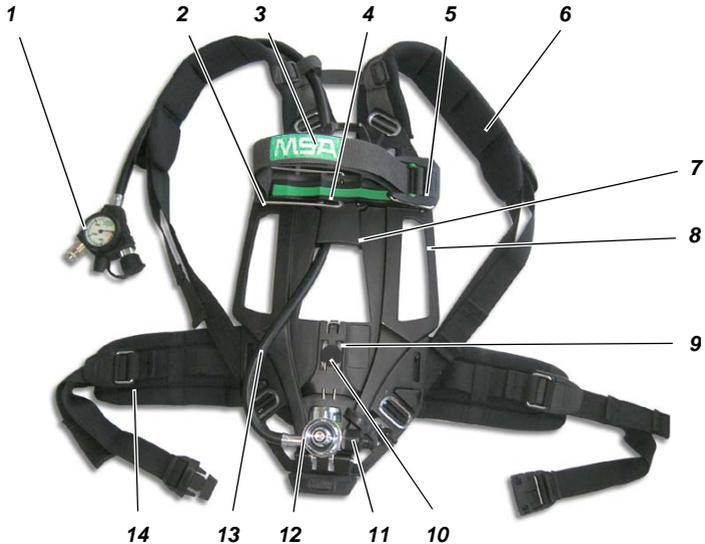


Fig. 1 Compressed air breathing apparatus AirGo (here model AirGo pro)

1	Manifold	8	Handle
2	Cylinder separator	9	Stop bracket (U-clip)
3	Cylinder retaining strap	10	Hip belt plate (Option)
4	Cylinder support	11	Quick-Fill coupling (Option)
5	Cylinder buckle	12	Pressure reducer
6	Shoulder strap	13	Pneumatic system (here SingleLine)
7	Back plate	14	Hip belt

The back plate consists of an anatomically designed plate of antistatic plastic with handles for easy transport of the apparatus. The pressure reducing valve is located in the lower section of the back plate. On the upper part of the back plate, a cylinder support is attached with integrated line guide.

The carrying belts and the hip belt are adjustable in length.

One or two compressed air cylinders can be placed in the cylinder support. The cylinder strap is freely adjustable and after inserting the compressed air cylinder(s), it is tightened and secured using the cylinder buckle.

The structure of the compressed air breathing apparatus is based on a modular design. This allows the user to configure the compressed air breathing apparatus from the modules available to match his specific requirements.

The following options are available:

Harness options (→ Section 2.1)	com	- compact basic harness with polyester straps
	pro	- padded harness
	mix	- hip belt as compact and shoulder straps as pro
	MaX	- premium harness
	eXX	- eXXtreme, for training
	BSP	- premium harness with protection tunnel
	FBS	alphaFP basic
	FBL	alphaFP basic large
	FPS	alphaFP PRO
	FPL	alphaFP PRO large
	ABP	alphaBELT PRO Basic
	APP	alphaBELT PRO PRO
	ABM	alphaBELT MAX Basic
	APM	alphaBELT MAX PRO
Back plate options (→ Section 2.2)	B	- bumper
	V	- bumper with valve-protection
	LG, SH	- cylinder retaining straps (long or short)
	SW	- swivelling hip plate (standard for harness options MaX and eXX, optional for pro)
	R	- retainer
	H	- rescue grip and retainer

Pneumatic system	
Pressure reducer (→ Section 2.3.1)	SingleLine – for use in SingleLine pneumatics classic – for use in classic pneumatics
SingleLine (→ Section 2.3.2)	SL - “hose-in-hose”, with manifold
	SI - with SingleLine SCOUT instead of gauge 1 medium pressure coupling
	SII with SingleLine SCOUT instead of gauge 2 medium pressure coupling
	Q - with additional quick-fill coupling
	M - with <i>alphaMITTER</i> (short distance transmitter)
	3C/3N - with additional medium pressure connection
	C3 - with coupling system <i>alphaCLICK 2</i> (300 bar)
classic pneumatics (→ Section 2.3.5)	CL - with separate high pressure and medium pressure lines and pressure gauge
	CM - with separate high pressure and medium pressure lines and pressure gauge, retrofit with <i>alphaMITTER</i>
	S - with signal line
	Z - with second medium pressure connection
	Y - with second medium pressure connection (laid over the shoulder)
	ICU/ICS - with integrated control unit
	C3 - with coupling system <i>alphaCLICK 2</i>
	M - with <i>alphaMITTER</i> (short distance transmitter), only with CM
Fix pneumatics (→ Section 2.3.6)	as classic with fixed lung governed demand valve (AE, AS, N, optional gauge cap) without coupling

2.1. Harness

There are different types of harness (shoulder and hip belt) available, each having different properties and carrying comfort:

com – basic harness

This is the basic harness. Shoulder strap and hip belt made of flame retardant polyester material with no additional padding.

pro – padded harness

Shoulder strap and hip belt made of Aramide reinforced material with additional padding (NOMEX®). The shoulder padding and the hip belt ensure effective weight distribution and offer high levels of carrying comfort.

Optionally, the hip belt is mounted on a swivelling plate (→ Section 2.2).

mix – mixed harness

Shoulder strap made of Aramide reinforced material with additional padding (NOMEX®) as in type pro.

The hip belt is made of flame retarded polyester material with no additional padding as in type com.

MaX – premium harness

Shoulder straps and hip belt are made of Aramide reinforced material and have additional padding with the shoulder straps being performed in an S-shape. The harness offer high levels of carrying comfort.

The hip belt is swivelling mounted (→ Section 2.2) and is known from the AirMaXX® breathing apparatus.

eXX – eXXtreme harness

The eXXtreme harness is based on the tried and tested AirMaXX®. The straps and belt are made from Aramide fibre and are particularly robust and fire-resistant. Protective sleeves in the shoulder padding protect the lines from flame and heat.

The harness is specially suited to repeated extreme demands in training situations, such as in flashover training, for example.

BSP – premium harness

This premium harness is a combination of the premium harness MaX and the eXXtreme harness eXX.

The protective sleeves are fixed on the one side with a “pull the dot” button and on the other side with a double button.

The frangible mounting with double buttons ensures a quick pulling out of an additional medium pressure line for supplying a second person with breathing air.

This premium harness has additional ribbons to attach a mask/helmet combination.

FP Fall Arrest

Solid stainless steel rings serve as attachment points for fall arrest lanyards. Positioning: D-rings on each side of the hip belt allow for safe positioning on an exposed work site.

Rappelling: Prolonged operations on a rope can be conducted in comfort, as the hip harness with both leg loops turns into a comfortable seat. By virtue of its slide-through design, normal walking is unobstructed.

Rescue: The back D-ring can be used for safe rescue from confined space. alphaFP pro additionally features hose protection tunnels on shoulder pads and quick connect buckles between harness and SCBA for ease of mounting or emergency removal during operation.

Belt

The comfortable alphaBELT Pro is the optimal configuration. Compared to the alphaBELT Basic it includes:

- Versatile alphaBELT Lanyard
- Safe rescue seat function
- Quick connect buckles for SCBA (separating function)
- Elastic fixation for overhanging strap ends

To build the rescue seat (EN 1498, class B), an additional rappelling carabiner (according to EN 362) is required in the front loop of the belt. For this purpose MSA recommends the MSA steel Tri-Lock carabiner, tested and approved for use with an SCBA. It is an optional accessory and not included.

2.2. Back Plate

Cylinder straps

There are cylinder straps of different lengths for securing one or two compressed air cylinders.

- Short cylinder strap (**SH**) - for use with one compressed air cylinder (from 4 l to 6.9 l)
- Long cylinder strap (**LG**) - for use with one or two compressed air cylinder(s) (for one cylinder from 4 l to 9 l, for two cylinders from 4 l to 6.9 l)

Bumper (B)

The bumper is made out of hard-wearing rubber and mounted on the bottom of the back plate. It prevents the apparatus from being damaged in the event that it is put down heavily.

Bumper with valve-protection (V)

The bumper is made out of hard-wearing rubber and mounted on the bottom of the back plate. The valve protection prevents the valve from being damaged in the event that it is put down heavily.

Hip belt plate (SW)

The swivelling hip belt plate is mounted on the bottom of the back plate and is used to support the hip belt.

The hip belt can be swivelled and thus follows all movements made by the equipment user. The swivel range is limited and the cushioned reset movement increases the feeling of safety.

For models MaX and eXX the swivelling hip belt plate is standard equipment and for the pro model it is available as an option.

Cylinder retainer (R)

The elastic cylinder retainer serves to increase friction between cylinder and back plate.

Rescue grip and retainer (H)

The rescue grip is used for drawing out persons and can be used for easy transport of the apparatus.

Separator (D)

Metal bracket to divide two cylinders to facilitate mounting of two cylinders and give guidance to cylinder strap.

Transponder

The back plate is equipped with a 125 kHz transponder (RFID chip) next to the label for easy identification.

2.3. Pneumatic System

2.3.1. Pressure Reducer

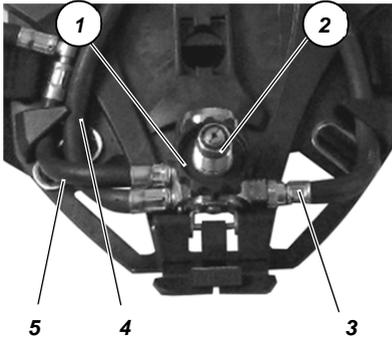


Fig. 2 Pressure reducer classic

- 1 Pressure reducer
- 2 Cylinder connection
- 3 Signal line
- 4 High pressure line
- 5 Medium pressure line

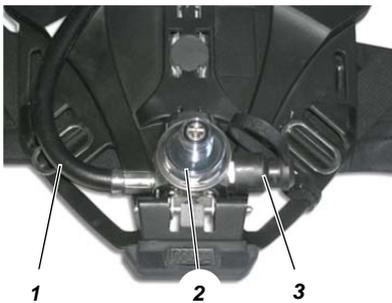


Fig. 3 Pressure reducer SingleLine

- 1 Single line
- 2 Cylinder connection
- 3 Quick-Fill coupling (Option)

The pressure reducer is mounted in the lower area of the back plate (→ Fig. 1). It is available in both classic and SingleLine pneumatic versions.

On the pressure reducer, there is a safety valve and the single line for connecting the manifold. The pressure reducer reduces the cylinder pressure to approx. 7 bar and the safety valve activates on non-permitted pressure rise to prevent damage insuring the continued supply of breathable air.

2.3.2. SingleLine Pneumatics

SingleLine pneumatics are available in options -Q, -M, -SI, -SII, -3C/3N, -C3.

The SingleLine pneumatics combines up to five hoses in one. This incorporates the lines for the lung governed demand valve, the pressure gauge, warning signal and second connection in a single line.

2.3.3. Manifold



Fig. 4 *Manifold*

- | | | | |
|---|--|---|--|
| 1 | <i>Pressure gauge</i> | 3 | <i>Warning signal (signal whistle)</i> |
| 2 | <i>Lung governed demand valve coupling</i> | 4 | <i>Second connection</i> |

In SingleLine Pneumatics, the end of the single line is connected to manifold. It consists of the pressure gauge itself, the coupling for the lung governed demand valve as well as an acoustic warning device (signal whistle). It triggers a continuous warning signal when the cylinder pressure drops below 55 ± 5 bar.

The second connection connects a second lung governed demand valve (e.g. rescue set).

2.3.4. SingleLine SCOUT

See additional manual SingleLine SCOUT.

2.3.4.1. Option – Q – with Quick-Fill Coupling

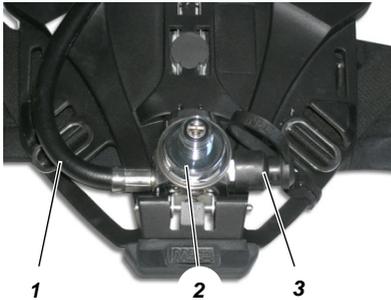


Fig. 5 *Pressure reducer SingleLine*

- 1 *Single line*
- 2 *Cylinder connection*
- 3 *Quick-Fill coupling*

The Quick-Fill coupling is a high-pressure safety coupling which is fitted directly on the pressure reducer (→ Fig. 2).

It is then possible to fill 300 bar compressed air cylinder(s) whilst the compressed air breathing apparatus is still donned. The connector of the pressure reducer is arranged so that a 200 bar compressed air cylinder cannot be connected in order to avoid inadvertent overfilling.



On compressed air breathing apparatus with Quick-Fill couplings, the use of 200 bar compressed air cylinders is not possible.



For further information please observe the separate Operation Manual for the Quick-Fill System (Part No. D4075049).

2.3.4.2. Option – 3C/3N – with Additional Connections for Medium Pressure

The compressed air breathing apparatus can be equipped with additional connections for medium pressure. These are located on the hip belt and are used for the connection of additional units such as, for example, a second lung governed demand valve or a rescue hood.

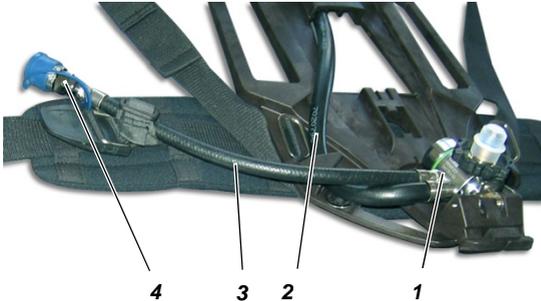


Fig. 6 Option SL-3C

1	Pressure reducer	3	Additional medium pressure line
2	Single line	4	Coupling for third connection

There is an additional medium pressure connection on the hip belt of the compressed air breathing apparatus which is available as a coupling in option 3C and as a nipple with integrated non-return valve in option 3N.

Option 3C is provided for the connection of the following units, under consideration of the specific national regulations:

- Rescue set (mask with lung governed demand valve)
- Rescue equipment e.g. Respihood
- Compressed air line equipment with or without automatic switch valve
- and for use in a protective suit during decontamination process.



Warning!

When rescuing persons with the rescue set via the second connection, more air is consumed.

Hence, the service time is considerably reduced. Always keep this in mind when using your apparatus.

Option 3N is prepared for the connection of the following equipment:

- Compressed Breathing Apparatus without automatic switch valve
- and for use in a protective suite including decontamination process.

2.3.4.3. Option – C3 – with Coupling System *alphaCLICK 2*



Fig. 7 Pressure reducer
1 *alphaCLICK 2* coupling

The *alphaCLICK 2* coupling system permits the easy, quick and safe connection of the compressed air cylinders to the pressure reducer. Time-consuming threading-on of the cylinder is no longer required since the cylinder is simply slotted into the pressure reducer.

alphaCLICK 2 is safer than the usual standard connection:

- *alphaCLICK 2* cannot be disconnected when the system is pressurised.
- Two steps are required to disconnect it: the cylinder can only be removed when the coupling handwheel has been turned by 20 degrees and pushed back.
- *alphaCLICK 2* has no built-in flow restrictor.
- Moreover, *alphaCLICK 2* has a flat face design which keeps the components clean and operative.

alphaCLICK 2 fits all standard breathable air valve threads [EN 144-2].

alphaCLICK 2 is only available for 300 bar:

alphaCLICK 2 coupling 300 bar**Fig. 8 alphaCLICK 2 coupling 300 bar**

- 1 alphaCLICK 2 coupling 300 bar
- 2 Indicator ring with arrow

alphaCLICK 2 cylinder adaptor 300 bar**Fig. 9 alphaCLICK 2 cylinder adaptor 300 bar**

- 1 alphaCLICK 2 cylinder adaptor 300 bar



The cylinder adaptor has to be screwed into a cylinder valve with a specific torque of 20-30 Nm.

2.3.4.4. Option – M – with *alphaMITTER* (short distance transmitter)

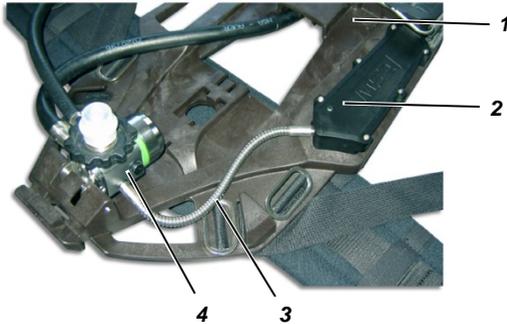


Fig. 10 *alphaMITTER*

- | | | | |
|---|--------------------|---|--------------------|
| 1 | Back plate | 3 | High pressure line |
| 2 | <i>alphaMITTER</i> | 4 | Pressure reducer |

The *alphaMITTER* is a short range transmitter which is mounted on the back plate of the compressed air breathing apparatus.

A high pressure line is used for the connection of the *alphaMITTER* to a dedicated port of the pressure reducer. It measures the high pressure in the compressed air cylinder(s) and transmits every second to the *alphaSCOUT* of the alpha personal network.

The power supply for the *alphaMITTER* is provided by 3 Alkaline batteries.



Attention!

The power supply should only be provided by certain types of battery for reasons of explosion prevention.

For detailed information on the *alphaMITTER* → Operating Manual for "alpha personal network".

2.3.5. classic Pneumatics

Option – CL

classic pneumatics are available in options -S, -Z, -ICU, -C3.

The individual high pressure and medium pressure lines are routed separately from the pressure reducer to the individual end units or connections.

The lung governed demand valve or the coupling to the lung governed demand valve is located at the end of the medium pressure line.

The pressure gauge (→ Fig. 11) or the ICU (→ Fig. 15) is fitted at the end of the high pressure line.



Fig. 11 Pressure gauge

The pressure gauge indicates the momentary pressure in the connected and opened compressed air cylinders.

Option – CM



The option CM of the classic pneumatics has the same basic characteristics as the CL option, but can be operated with an *alphaMITTER*.

2.3.5.1. Option – S – with Signal Line



Fig. 12 Option AirGo –S (here with additional medium pressure coupling)

- 1 Pressure reducer
- 2 Signal line
- 3 Warning device (signal whistle)

This option is equipped with a signal line. The warning whistle is on a separate signal line near the ear of the user where it can be heard well and easily identified as his own warning signal.

2.3.5.2. Option – Z – with Second Medium Pressure Line

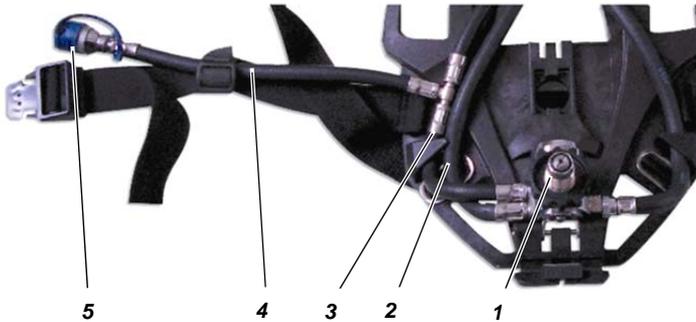


Fig. 13 Option AirGo -Z

- | | | | |
|---|----------------------|---|--------------------------------|
| 1 | Pressure reducer | 4 | Second medium pressure line |
| 2 | High pressure line | 5 | Coupling for second connection |
| 3 | Medium pressure line | | |

There is a second medium pressure connection with safety coupling on the hip belt, which is closed off with a plug when not being used.

In consideration of national regulations, you can use this connection to:

- connect a second lung governed demand valve;
- a rescue set, consisting of a normal pressure lung governed demand valve and full face mask for rescuing people;
- connect to compressed air line system using the double nipple that is available as accessory (→ Section 5), e.g. for decontamination after use or
- to connect a rescue hood.



Warning!

When rescuing persons with the rescue set via the second connection, more air is consumed.

Hence, the service time is considerably reduced. Always keep this in mind when using your apparatus.

2.3.5.3. Option – Y – with Second Medium Pressure Line

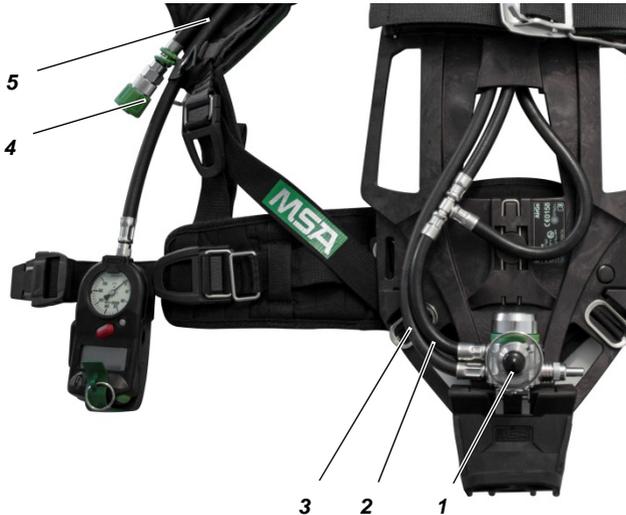


Fig. 14 Option AirGo -Y

- | | | | |
|---|----------------------|---|--------------------------------|
| 1 | Pressure reducer | 4 | Coupling for second connection |
| 2 | Medium pressure line | 5 | Second medium pressure line |
| 3 | High pressure line | | |

There is a second medium pressure connection with safety coupling, which is closed off with a plug when not being used.

In comparison to option z the second medium pressure line is longer and located on the shoulder strap.

In consideration of national regulations, you can use this connection to:

- connect a second lung governed demand valve;
- a rescue set, consisting of a normal pressure lung governed demand valve and full face mask for rescuing people;
- connect to compressed air line system using the double nipple that is available as accessory (→ Section 5), e.g. for decontamination after use or
- to connect a rescue hood.



Warning!

When rescuing persons with the rescue set via the second connection, more air is consumed.

Hence, the service time is considerably reduced. Always keep this in mind when using your apparatus.

2.3.5.4. Option – ICU/ICS – Integrated Control Unit (with or without key)



Fig. 15 *Integrated Control Unit ICU*

- 1 Connector for high pressure line
- 2 Pressure gauge
- 3 RESET Button
- 4 ALARM Button
- 5 LCD Display

The integrated control unit serves to monitor the normal function of the compressed air breathing apparatus, the display of the compressed air data and the display and signalisation of alarm conditions. The ICU replaces the normal pressure gauge.

It is also equipped with a movement sensor and with the facility for initiating an alarm manually.

In the case of the keyed option ICU-S, the key is lodged with the incident command for identification purposes.



Further information concerning the ICU can be taken from the ICU Operating Manual.

2.3.5.5. Option – C3 – with Coupling System *alphaCLICK 2*



For further information concerning the *alphaCLICK 2* please refer to Section 2.3.4.3.

2.3.5.6. Option – M – with *alphaMITTER* (short distance transmitter)



For further information concerning the *alphaMITTER* please refer to Section 2.3.4.4.

2.3.6. Fix Pneumatics

Fix pneumatics are available in options -Z, -AE, -AS, -N, gauge cap (optional equipment).

The individual high pressure and medium pressure lines are routed separately from the pressure reducer to the individual end units or connections.

The lung governed demand valve is fixed at the end of the medium pressure line.

The pressure gauge is fitted at the end of the high pressure line.



For further information concerning the full face masks refer to the Operating Manual of the full face masks.

2.3.6.1. Option – Z

Please see Section 2.3.5.2.

2.3.6.2. Option – N

In this option there is an AutoMaXX-N lung governed demand valve fixed at the medium pressure line.

The AutoMaXX-N lung governed demand valve is for use with negative pressure. It is fitted with thread connection RD40X1/7 and suitable for full face masks 3S, Ultra Elite, 3S-H-F1 and Ultra Elite-H-F1 with standard thread connection.

2.3.6.3. Option – AE

In this option there is an AutoMaXX-AE lung governed demand valve fixed at the medium pressure line.

The AutoMaXX-AE lung governed demand valve is for use with positive pressure. It is fitted with thread connection M45x3 and suitable for full face masks 3S-PF, Ultra Elite-PF, 3S-H-PF-F1, Ultra Elite -H-PF-F1 and G1 M45x3 with standard thread connection.

2.3.6.4. Option – AS

In this option there is an AutoMaXX-AS lung governed demand valve fixed at the medium pressure line.



Attention!

This lung governed demand valve is only for use with PS-MaXX full face masks.

It is not for use with PS full face masks.

The AutoMaXX-AS lung governed demand valve is for use with positive pressure. It is fitted with a plug-in connector and suitable for full face masks 3S-PS-MaXX, Ultra Elite-PS-MaXX, 3S-H-PS-MaXX-F1, Ultra Elite-H-PS-MaXX-F1 and G1 PS-MaXX.

3. Using the Compressed Air Breathing Apparatus

**Warning!**

The compressed air breathing apparatus may only be put into use in a fully maintained and tested condition. If malfunctions or defects are noticed prior to use, do not use the compressed air breathing apparatus under any circumstances.

Get the apparatus checked and repaired by an authorised service centre.

3.1. Prior to the First Use

Prior to the first use, the apparatus must be prepared for the number and types of compressed air cylinders. Afterwards, when changing compressed air cylinders (without attached bumpers) that have the same diameter, the closed loop of the tension strap is increased or again tightened by opening or closing the cylinder buckle. A readjustment of the length of the tension strap and a loosening of the Velcro closure then is no longer required.

- (1) Before installing the threaded handwheel, check that the O-ring inside the handwheel high pressure socket is present and free of damage. If the O-ring is damaged, it must be replaced before the SCBA is used.
- (2) Thread the handwheel into the cylinder thread. The handwheel should be hand-tight (no tools should be used).

3.2. Connecting One Compressed Air Cylinder



Fig. 16 SCBA with one compressed air cylinder

3.2.1. Pressure Reducer with Thread Connection

3.2.1.1. Preparing the Apparatus for Use with One Compressed Air Cylinder

- (1) Hinge down the cylinder separator that is in the middle of the cylinder support into a horizontal position until it catches.
- (2) If necessary, disconnect T-piece from high pressure socket of pressure reducer.

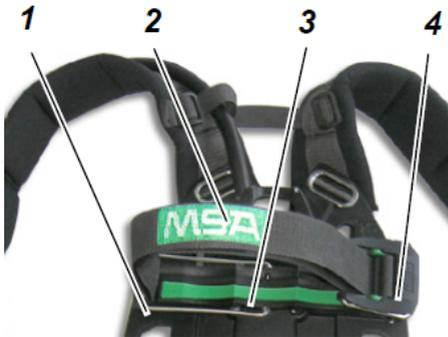


Fig. 17 Compressed air breathing apparatus – details

- | | | | |
|---|--------------------------|---|------------------|
| 1 | Cylinder separator | 3 | Cylinder support |
| 2 | Cylinder retaining strap | 4 | Cylinder buckle |

3.2.1.2. Connecting One Compressed Air Cylinder

- (1) Place compressed air breathing apparatus horizontally so that the back face is uppermost (→ Fig. 17).
- (2) Bring cylinder separator (1) into a horizontal position opposite the cylinder buckle (4) until it catches.
- (3) Check gasket on pressure reducer high pressure socket for proper condition.
- (4) Open cylinder buckle on the cylinder strap eliminating any tension by extending the strap to full length pulling the small bar at the buckle (→ Fig. 18).

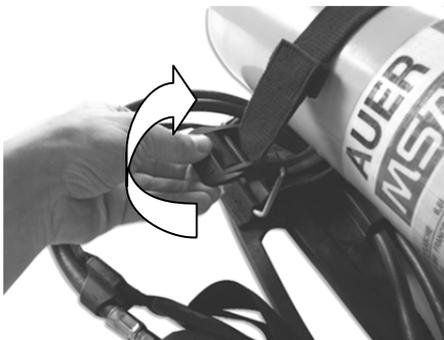


Fig. 18 Opening the cylinder buckle

- (5) Push compressed air cylinder through the cylinder strap (2) with the cylinder valve toward the pressure reducer so that it lies on the central support (3).
- (6) Thread cylinder valve onto pressure reducer, if necessary, bring the compressed air breathing apparatus with valve up into a vertical position.

- (7) Put the SCBA back into the horizontal position. Check that the cylinder is laying on the central support (3).
- (8) Tighten cylinder strap (2) by pulling the free end.



Attention!

Do not overtighten the cylinder strap! Damage can occur when using excessive force to close the cylinder buckle and the SCBA might not be ready for use.

The final fastening tension will be achieved when closing the cylinder buckle.

- (9) Check position of compressed air cylinder, retighten if necessary.
- (10) Hinge cylinder buckle (4) gently and completely down over the centre until it catches.
- (11) If push force/tension is too high during hinging of the cylinder buckle, re-adjust the strap length at the cylinder buckle. If the strap tension is too low, re-adjust the strap length at the cylinder buckle (→ Fig. 19).

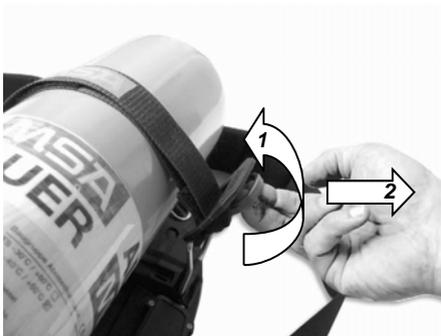


Fig. 19 Readjusting the strap length at the buckle

- (12) Fasten end of the cylinder retaining strap onto Velcro strip.
- (13) Briefly open cylinder valve and check for escaping air, retighten if necessary.

3.2.2. Pressure Reducer with *alphaCLICK 2*

3.2.2.1. Installing Quick Connect Adaptor to Cylinder

- (1) Use only a fully charged cylinder and inspect the internal thread of the cylinder valve to ensure it is not damaged and free of dirt and debris.
 - The threaded connection of the cylinder valve must be undamaged and free from dirt and debris.
 - If the cylinder valve is damaged, remove it from service and return it to a MSA trained or certified repair technician.

- (2) Inspect the external threads of the cylinder adaptor and the nipple of the male connector on the pressure reducer to ensure they are not damaged and free of dirt and debris.
 - Ensure that the O-ring is installed on the cylinder adaptor and it is undamaged and free of dirt and debris.
- (3) Thread the adaptor with a specific torque of 20-30 Nm into the cylinder valve.
- (4) Before installing, ensure there is no dirt or debris on either the male or female end of the coupling. Ensure the adaptor on the cylinder valve is tight.
- (5) Push the quick connect coupling (using light force) onto the male adaptor of the pressure reducer until an audible snap is heard. The handwheel will rapidly rotate approx. 45° counter-clockwise indicating that the valve is connected to the pressure reducer.
- (6) Grasp the handwheel firmly and pull on it to ensure the handwheel is fully attached.

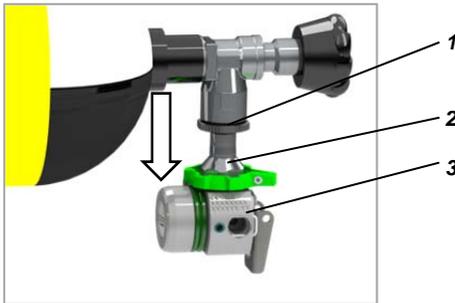


Fig. 20 Compressed air cylinder with alphaCLICK 2

- 1 Compressed air cylinder with alphaCLICK 2 cylinder adaptor
- 2 alphaCLICK 2 coupling
- 3 Pressure reducer

3.2.2.2. Connecting One Compressed Air Cylinder

- (1) If necessary, thread the *alphaCLICK 2* cylinder adaptor with a specific torque of 20-30 Nm into the cylinder valve (→ Section 5).
- (2) Place compressed air breathing apparatus horizontally so that the back face is uppermost (→ Fig. 17).
- (3) Bring cylinder separator (1) into a horizontal position opposite the cylinder buckle (4) until it catches.



When fitting the compressed air cylinder on the coupling of the pressure reducer, it may tip down. In this case, support the pressure reducer with your hand.

- (4) Open cylinder buckle on the cylinder strap eliminating any tension by extending the strap to full length pulling the small bar at the buckle (→ Fig. 18).
- (5) Push compressed air cylinder through the cylinder strap (2) with the cylinder valve toward the pressure reducer so that it lies on the central support (3).
- (6) Align the compressed air cylinder with the *alphaCLICK 2* axially to the coupling and fit on the *alphaCLICK 2* coupling.

**Attention!**

Never push the coupling system together using excessive force.

- (7) Close the coupling by pushing together using a "small amount" of force and checking that the arrow of the indicator ring is vertically aligned with the back plate.
- (8) Tighten cylinder strap gently by pulling the free end.

**Attention!**

Do not overtighten the cylinder strap! Damage can occur when using excessive force to close the cylinder buckle and the SCBA might not be ready for use.

The final fastening tension will be achieved when closing the cylinder buckle.

- (9) Check position of compressed air cylinder, re-position if necessary.
- (10) Hinge cylinder buckle (4) gently and completely down over the centre until it catches.
- (11) If push force/tension is too high during hinging of the cylinder buckle, re-adjust the strap length at the cylinder buckle. If the strap tension is too low, re-adjust the strap length at the cylinder buckle (→ Fig. 19).
- (12) Fasten end of the cylinder retaining strap onto Velcro strip.
- (13) Briefly open cylinder valve and check for escaping air, retighten if necessary.

3.3. Connecting Two Compressed Air Cylinders

3.3.1. Pressure Reducer with Thread Connection



Fig. 21 SCBA apparatus with two compressed air cylinders

3.3.1.1. Preparing the Apparatus for Use with Two Compressed Air Cylinders

- (1) Hinge up the cylinder separator to a vertical position in the middle of the cylinder support until it catches.
- (2) Connect T-piece to high pressure socket of pressure reducer.

3.3.1.2. Connecting Two Compressed Air Cylinders

- (1) Place compressed air breathing apparatus horizontally so that the back face is uppermost (→ Fig. 17).
- (2) Hinge cylinder separator (1) into a vertical position until it catches.
- (3) If there is no T-piece connected to the pressure reducer, check gaskets on the pressure reducer and T-piece and thread in T-piece loosely.
- (4) Open cylinder buckle on the cylinder strap eliminating any tension by extending the strap to full length pulling the small bar at the cylinder buckle (→ Fig. 19).
- (5) Push one compressed air cylinder through the cylinder retaining strap so that the cylinder valve points to the T-piece and lies on one of the outer supports.
- (6) Loosely thread the cylinder valve onto the T-piece.
- (7) Push a second compressed air cylinder through the cylinder retaining strap so that the cylinder valve points to the T-piece and lies on the outer support.
- (8) Loosely thread the second cylinder valve onto the T-piece.



With right-angled T-piece, align the compressed air cylinders by hinging the pressure reducer and pulling the cylinders together (see Operating Manual for T-pieces).

- (9) Tighten all three high pressure connection handwheels.

- (10) Briefly open cylinder valves and check for escaping air, retighten if necessary.
- (11) Tighten cylinder strap gently by pulling the free end.

**Attention!**

Do not overtighten the cylinder strap! Damage can occur when using excessive force to close the cylinder buckle and the SCBA might not be ready for use.

The final fastening tension will be achieved when closing the cylinder buckle.

- (12) Hinge cylinder buckle down until it catches.
- (13) If push force/tension is too high during hinging of the cylinder buckle, re-adjust the strap length at the cylinder buckle. If the strap tension is too low, re-adjust the strap length at the cylinder buckle (→ Fig. 19).
- (14) Fasten end of the cylinder retaining strap onto Velcro strip.
- (15) Check that compressed air cylinders are held securely, retighten if necessary.

3.3.2. Pressure Reducer with *alphaCLICK 2*

- (1) If necessary, thread the *alphaCLICK 2* cylinder adaptor with a specific torque of 20-30 Nm into the cylinder valve (→ Section 5).
- (2) Proceed as described from (1) to (5) for pressure reducer with thread connection.
- (3) Thread the cylinder valve onto the T-piece.
- (4) Push a second compressed air cylinder through the cylinder retaining strap so that the cylinder valve points to the T-piece and lies on the outer support.
- (5) Thread the second cylinder valve onto the T-piece.



When fitting the T-piece with *alphaCLICK 2* on the coupling of the pressure reducer, it may tip down.

In this case, support the pressure reducer with your hand.

- (6) Align the T-piece with the *alphaCLICK 2* axially to the coupling and fit on the *alphaCLICK 2* coupling.

**Attention!**

Never push the coupling system together using excessive force.

- (7) Close the coupling by pushing together using a "small amount" of force and checking that the arrow of the indicator ring is vertically aligned with the back plate.

- (8) Proceed as described from (9) to (14) for pressure reducer with thread connection.

3.4. Donning the Compressed Air Breathing Apparatus

- (1) Check all components of the compressed air breathing apparatus for defects and malfunctions.
- (2) Don breathing apparatus with shoulder straps fully extended.
- (3) Close hip belt and tighten loose ends **towards the front**.
- (4) Tighten shoulder straps until back plate fits comfortably.
- (5) Adjust shoulder straps to achieve a comfortable weight distribution between shoulder straps and hip belt.
- (6) If required, connect lung governed demand valve to medium pressure connection (→ Operating Manual for lung governed demand valve).

3.5. Condensed Check Prior to Use

- (1) Ensure that lung governed demand valve is closed.
- (2) Open cylinder valve(s) and check pressure on the pressure gauge.

The pressure values must read:

for 300 bar cylinders: minimum 270 bar

for 200 bar cylinders: minimum 180 bar

- (3) Close cylinder valve(s) and check pressure gauge.
 - The pressure must not drop more than 10 bar in 60 seconds.
- (4) Carefully activate flushing mode of lung governed demand valve, closing exit port as much as possible.
- (5) Observe the pressure gauge.
 - The warning signal must sound at 55±5 bar.

3.6. Donning the Full Face Mask

- (1) Don full face mask (→ Operating Manual for mask) and carry out palm test.
- (2) Open cylinder valve(s) fully.

**Warning!**

When using two compressed air cylinders, always open the valves of both cylinders. Only then will both cylinders empty uniformly.

- (3) Connect lung governed demand valve to full face mask (→ Operating Manual for lung governed demand valve).
- (4) The compressed air breathing apparatus is ready for use.

3.7. During Use

- (1) Regularly check tight fit of full mask and lung governed demand valve and retighten if necessary, as well as the air supply on the pressure gauge.
- (2) Leave area immediately if the warning signal sounds.



Independently of the warning signal an earlier retreat may be required whilst in the case of a longer retreat route the moment chosen is based on the reading of the pressure gauge.

**Warning!**

The warning signal sounds when the air supply in the compressed air cylinders is reduced.

In such cases, immediately leave the area, there is danger of air deficiency.

3.8. Use of Additional Connections for Medium Pressure

- (1) Remove protection cap from the coupling of the additional connection for medium pressure.
- (2) Connect medium pressure line of lung governed demand valve of second user until the coupling audibly catches.



Warning!

When rescuing persons with the rescue set via the second connection, more air is consumed.

Hence, the service time is considerably reduced. Always keep this in mind when using your apparatus.

3.9. Handling the Warning Device

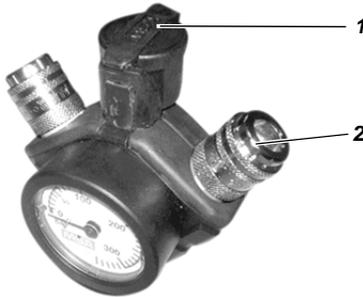


Fig. 22 Manifold

- 1 Warning signal with protective cap
- 2 Second connection



Only applicable to SingleLine Pneumatics.

After using, it is possible to reduce the volume of the warning device during the decontamination process. This is done by removing the protective cap from the second connection on the manifold and pushing it onto the warning device.



Warning!

During duty, damping down the warning signal tone is not permitted. Remove the protective cap from the warning device again and push it onto the second connection after the SCBA Basic Apparatus has been removed.

3.10. Filling with Quick-Fill



Fig. 23 Filling with Quick-Fill (optional equipment)

1 Quick-Fill coupling



Only applicable to SingleLine Pneumatics.

With the Quick-Fill function, the compressed air cylinder(s) of the breathing apparatus can be filled during use (→ Operating Manual for Quick-Fill).

3.11. Removing the Compressed Air Breathing Apparatus

- (1) Remove lung governed demand valve, or full face mask.
- (2) Close cylinder valve(s).
- (3) Activate flushing mode of lung governed demand valve, releasing all air pressure.
- (4) Open hip belt.
- (5) Extend shoulder straps by lifting the slides.



Danger!

Do not throw off compressed air breathing apparatus. This could damage the valve and any remaining compressed air could escape suddenly.

This could cause fatal injury to you or to any bystanders.

- (6) Remove compressed air breathing apparatus.

3.12. Removing the Compressed Air Cylinders

3.12.1. Pressure Reducer with Thread Connection

- (1) Place the compressed air breathing apparatus in a horizontal position with the cylinder facing up.
- (2) Hinge up cylinder buckle at cylinder strap (→ Fig. 18) and thus loosen the strap.



When exchanging compressed air cylinders of the same diameter (without attached bumpers), only the cylinder buckle needs to be opened.

- (3) Close cylinder valve(s) and release air from pneumatic system of the SCBA with lung governed demand valve.
- (4) Unthread cylinder valve(s) from pressure reducer and/or T-piece.



Attention!

Do not remove the compressed air cylinder(s) from the cylinder strap or transport the compressed air cylinder(s) by the handwheel. This could accidentally open the cylinder valve.

- (5) Lift compressed air cylinder(s) at the valve and pull out of cylinder strap.
- (6) Close high pressure connection cylinder valve(s) with protection plug(s).

3.12.2. Pressure Reducer with *alphaCLICK 2*

- (1) Place the compressed air breathing apparatus in a horizontal position with the cylinder facing up.
- (2) Hinge up cylinder buckle at cylinder strap (→ Fig. 18) and thus loosen strap.



When exchanging compressed air cylinders of the same diameter (without attached bumpers), only the cylinder buckle needs to be opened.

- (3) Close cylinder valve(s) and release air from pneumatic system of the SCBA with lung governed demand valve.
- (4) For compressed air cylinders with *alphaCLICK 2* turn the handwheel on the coupling side (arrow 1) in a clockwise direction first (→ Fig. 24) and then, when closed up to the stop, push downwards in the direction of the pressure reducer (arrow 2).

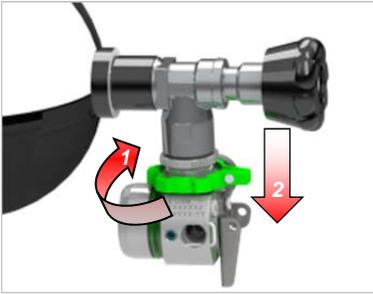


Fig. 24 Removing a cylinder with alphaCLICK 2

- The cylinder adaptor releases from the *alphaCLICK 2* coupling.



Attention!

Do not remove the compressed air cylinder(s) from the cylinder strap or transport the compressed air cylinder(s) by the handwheel. This could accidentally open the cylinder valve.

- (5) Lift compressed air cylinder(s) at the valve and pull out of cylinder strap.

4. Maintenance and Care

4.1. Maintenance Instructions

This product should be regularly checked and serviced by specialists. Inspection and service records must be maintained. Always use original parts from MSA.

Repairs and maintenance must be carried out only by authorised service centres or by MSA. Changes to devices or components are not permitted and could result in loss of approved status.

MSA is liable only for maintenance and repairs carried out by MSA.

Do not use organic solvents such as alcohol, white spirit, petrol etc.

When drying/washing, do not exceed the maximum permissible temperature of 60 °C.



MSA recommends the following maintenance intervals. If needed and by considering the usage, tasks may be at even shorter intervals than indicated.

Observe national laws and regulations!

If in any doubt, ask your local MSA contact person.

4.2. Maintenance Intervals

Test Intervals for all Countries (except Germany)

Component	Work to be Performed	Before use	After use	Annually	Every 3 years	Every 9 years ¹⁾
Compressed air breathing apparatus complete	Cleaning		X		X	
	Sight, function and tightness check		X	X		
	Check by user ²⁾	X				
Compressed air breathing apparatus without cylinder and lung governed demand valve	Overhaul					X
<i>alphaCLICK 2</i> coupling	Cleaning		X			
	Lubricate			X ³⁾		
	Check by user	X				
Compressed air cylinder with valve	Filling pressure check	X				
	Technical expert test	See Operating Manual for compressed air cylinder. Please observe national rules!				
Lung governed demand valve	See Operating Manuals for lung governed demand valve / full face mask. Please observe national rules! ⁴⁾					

- 1) For SCBA apparatus that are frequently used, we recommend a complete overhaul after approx. 540 hours. For example, this corresponds to 1080 applications with a duration of 30 minutes.
- 2) The checks are performed with the respective lung governed demand valves and if required, with the respective full masks.
- 3) Lubricate *alphaCLICK 2* coupling every 500 coupling cycles at least (see maintenance manual).
- 4) Rubber components are subject to ageing with varying rates according to local conditions and must be checked and replaced at regular intervals.

4.3. Cleaning

4.3.1. Pre-cleaning

- (1) Open cylinder valve(s) of the mounted compressed air cylinder(s) fully.
- (2) Remove rough dirt from breathing apparatus with water hose. Here, we recommend using a mild detergent.
- (3) Close cylinder valve(s) and release air from apparatus with lung governed demand valve.

4.3.2. Cleaning, Light Soiling

- (1) Remove compressed air cylinder(s) (→ Section 3.12).
- (2) Clean compressed air breathing apparatus manually using a brush, damp cloth or similar.
- (3) Dry apparatus completely in a drying cabinet at max. 60 °C.

4.3.3. Cleaning, Heavy Soiling



In the event of heavy soiling the compressed air breathing apparatus should be partially dismantled.

The number of lines depends upon the type of pneumatics being used.

- (1) Remove compressed air cylinder(s) (→ Section 3.12).
- (2) Disconnect lung governed demand valve from medium pressure line.
- (3) Open the line retainer and unbutton the shoulder padding if present.



The shoulder straps and hip belt of the compressed air breathing apparatus are fastened in the back plate with metal buckles. To remove the straps and the belt, you must pull the buckles up slightly, tilt them and push them out of the slots in the back plate.

If a swivelling hip plate is fitted the belt are removed with the removal of the hip plate.

- (4) Open line tunnel and unbutton shoulder pads at the snap fasteners.

The lowest button of the line tunnel is a heavy duty, three side locking snap fastener (“pull the dot”) that is designed to withstand extreme pressure on three sides without unlocking. When pulled on the fourth side where there is an indentation on the “pull the dot” button (back of tunnel), the fastener will release instantly.

The easiest way to open the tunnel is to pull both tunnel elements above the “pull the dot” button, as shown in the following picture.

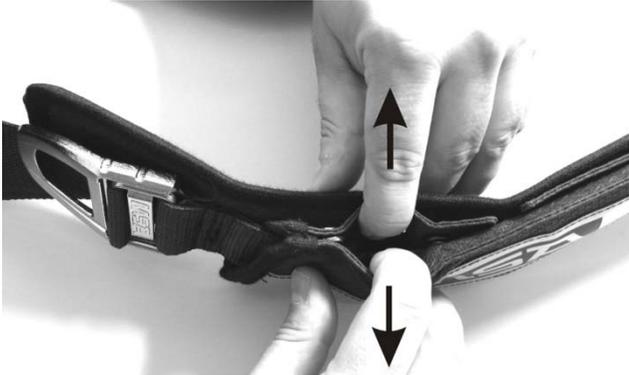


Fig. 25 “Pull the dot” button

- (5) If present, remove the swivelling hip plate (→ Section 4.3.4).
- (6) Unbutton shoulder pads and hip belt from back plate.
- (7) Do the same on the other side of the back plate.
- (8) Independent of the pneumatic system, remove the lines from the guides on the back plate.



Fig. 26 Pressure reducer with bumper

- 1 U-Clip
- 2 Catch spring
- 3 Bumper
- 4 Axis

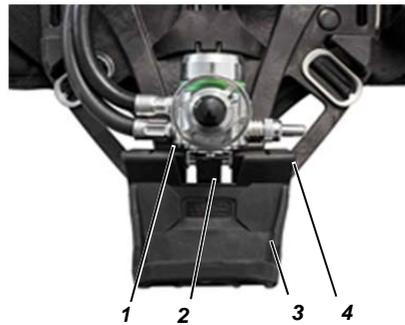


Fig. 27 Pressure reducer with bumper and valve-protection

- 1 U-Clip
- 2 Catch spring
- 3 Bumper with valve protection
- 4 Axis



U-Clip and hoses are not to be removed after removing the pressure reducer.

- (9) Push the axis out of the retainer on the pressure reducer (→ Fig. 26 and Fig. 27).
- (10) Remove pressure reducer from the back plate, do not push up the catch spring.
- (11) Clean back plate with cylinder strap at max. 60 °C.
- (12) Clean harness in a suitable washing machine at max. 60 °C.
- (13) Clean lines, pressure reducer and pressure gauge preferable by hand.
If you want to clean under water: pressurise the pressure reducer and seal the warning signal (e.g. with a flexible tube)

**Attention!**

The pressure reducer must be pressurised if submerged in water.
Make sure that no water penetrates high and medium pressure cavities.

- (14) Shake out humidity from pressure reducer.
- (15) Completely dry all compressed air breathing apparatus components in a drying cabinet at max. 60 °C.
- (16) Assemble the compressed air breathing apparatus in the reverse order.

4.3.4. Removing the Swivelling Plate



Fig. 28 Swivelling plate

1 Stop bracket

- (1) Remove stop bracket (U-clip) from the back plate.
- (2) Remove the hip plate from the back plate.
- (3) Unbutton the hip belts from the swivelling plate (→ Note in Section 4.3.3).
- (4) Assemble the hip belt and swivelling plate in the reverse order.

4.3.5. Cleaning and disinfection of AutoMaXX on Fix pneumatics

Existing Fix medium pressure line (without coupling) must be exchanged with standard medium pressure line (→ Section 9.4) for pressurised cleaning/ disinfection and/or testing on test unit.

(1) Pull off AutoMaXX protective cap as follows:

For AutoMaXX-AS

- With one hand push and hold down both operating buttons, with the other hand push together both snap-on hooks and push off the protective cap.

For AutoMaXX-AE

- Turn handwheel until the safety clamp below the black operating button is visible through the handwheel opening.



Fig. 29 Housing

1 Securing clamp (only AutoMaXX-AE and AutoMaXX-N)

- Push in safety clamp with a screwdriver, simultaneously push both operating buttons and pull off handwheel.
- With one hand push and hold down both operating buttons, with the other hand push together both snap-on hooks and push off the protective cap.

For AutoMaXX-N

- Turn handwheel until the safety clamp below an operating button is visible through the handwheel opening.
- Push in safety clamp with a screwdriver, simultaneously push both operating buttons and pull off handwheel.
- With one hand push and hold down both operating buttons, with the other hand push together both snap-on hooks and push off the protective cap.

(2) Disassembly Medium Pressure Line

- With the protective cap disassembled, pull the silver coloured clamp (U-clip) out of the housing.



Fig. 30 *Disassembly medium pressure line*

- Pull medium pressure line out of the housing.

(3) Assembly Medium Pressure Line

- Check O-ring on bend for visible damage and replace if required
- Push medium pressure line into housing till stop
- Push U-clip **from the diaphragm side** (→ arrow in Fig. 31) into holes of housing till stops. The medium pressure line is secured.

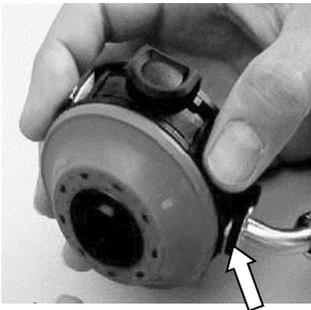


Fig. 31 *Assembly medium pressure line*

- (4) Slide on protective cap as follows:
 - Push both operating buttons simultaneously and slide on protective cap until it audibly and visibly snaps into place on the snap-on hooks.
- (5) Assemble handwheel as follows:

For AutoMaXX-AE and AuroMaXX-N only

- Push in safety clamp and simultaneously push and hold down both operating buttons.
- Slide on handwheel until stopper.



Attention!

Observe the right seat of positive pressure spring in the guide of the diaphragm.



Fig. 32 *Handwheel assembly*



For further information please observe the separate Operation Manual for the AutoMaXX System (Part No. 10083261).

4.4. Changing the Straps and Belt

The shoulder straps and the hip belt are fastened to the back plate with metal buckles (→ Fig. 33 and Fig. 34).

For removing the straps and the belt you must pull up the buckles slightly, tilt them and push them out of the slots in the back plate.

4.4.1. Changing the Shoulder Straps

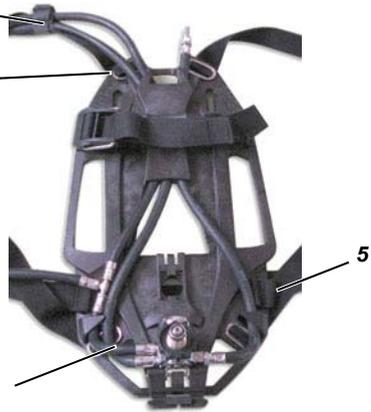


Fig. 33 AirGo pro harness

- 1 Line retainer
- 2 Shoulder strap buckles
- 3 Hip belt mounting slot

Fig. 34 AirGo compact harness

- 4 Shoulder strap buckles
- 5 Hip belt back stop

- (1) Loosen the line retainer and remove the pressure line from the shoulder strap.
- (2) Remove the shoulder straps from the slots on the top of the back plate.
- (3) Remove the shoulder straps from the slots on the bottom of the back plate.
- (4) Assemble in reverse order.

4.4.2. Changing the Protection Tunnel

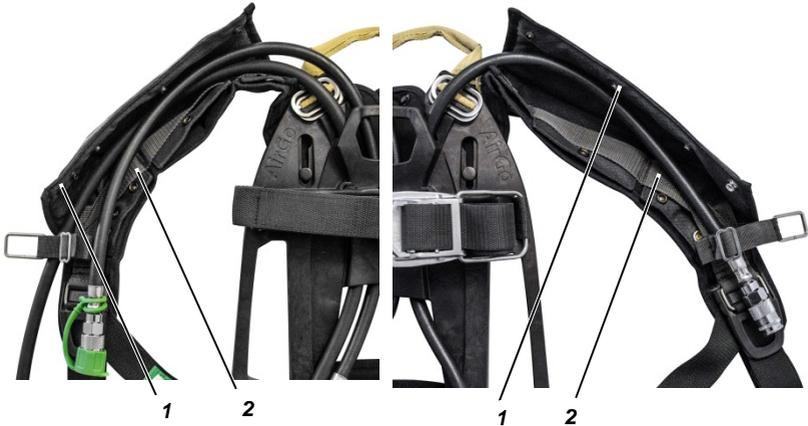


Fig. 35 Protection tunnel with double buttons

- 1 Protection tunnel with double buttons
2 Shoulder strap

Fig. 36 Protection tunnel with “pull the dot” button

- 1 Protection tunnel with “pull the dot” button
2 Shoulder strap

- (1) Open the “pull the dot” button on the one side (see section 4.3.3) and the double button on the other side.
- (2) Remove the protection tunnels from the shoulder strap.
- (3) Slide the protection tunnel under the shoulder strap and under the line retainer.
- (4) Place the line on the shoulder strap.
- (5) Close the “pull the dot” button and the double button.

4.4.3. Changing the Holder for Mask/Helmet Combination



Fig. 37 Premium harness with holder for mask/helmet combination

1 Holder for mask/helmet Combination left



Fig. 38 Premium harness with holder for mask/helmet combination

1 Holder for mask/helmet Combination right

- (1) Loosen the buckle of the holder for mask/helmet combination.
- (2) Pull out the holder for mask/helmet combination.
- (3) Assemble in reverse order.

4.4.4. Removing the Rescue Grip



Fig. 39 Rescue grip

1 Rescue grip
2 Back plate

- (1) Loosen one end of the rescue grip and turn the buckle that it can be pushed out of the slots in the back plate.
- (2) Remove the rescue grip from the back plate.
- (3) Repeat these steps for the other side.
- (4) Assemble the rescue grip in the reverse order.

4.4.5. Changing the Hip Belt

4.4.5.1. Options MaX, eXX and pro with Swivelling Plate

In these options a swivelling hip belt plate can be fitted. The hip belt is directly mounted on the swivelling plate as shown in Fig. 40.

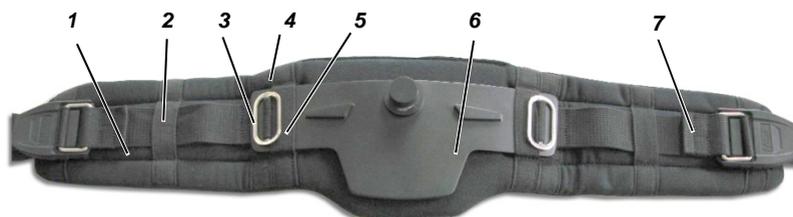


Fig. 40 Hip belt with swivelling plate

- | | |
|-------------------------|--------------------|
| 1 Hip belt with padding | 5 Inner loop |
| 2 Outer loop | 6 Swivelling plate |
| 3 Buckle | 7 Back stop |
| 4 Middle loop | |

Disassembling

- (1) Remove one of the buckles from the swivelling plate.
- (2) Push the hip plate sideways and remove it from the loop.
- (3) Repeat the procedure for the second buckle (on the other side).
- (4) Remove the left and the right hip belt from the padding.

Assembling



When assembling ensure that the belt is mounted correctly using the outer belt loops on both sides of the padding.

Use the inner loops for mounting the swivelling hip plate.

- (1) Thread the metal buckles and the belt as shown in Fig. 40 through the **outer** loops in the belt padding.
- (2) Thread the swivelling plate into the two **inner** loops of the belt padding.
- (3) Mount the metal buckles as shown at the swivelling plate.

4.4.5.2. Option pro without Swivelling Plate

In this option the hip belt is mounted to the back plate **without** a swivelling plate using the hip belt slots (→ Fig. 33).

The hip belt with padding is shown in Fig. 41.



Fig. 41 Hip belt without swivelling plate

- | | |
|-------------------------|-------------|
| 1 Hip belt with padding | 4 Buckle |
| 2 Outer loop | 5 Back stop |
| 3 Middle loop | |

Disassembling

- (1) Remove the metal buckles from the back plate.
- (2) Remove the left and the right hip belt from the padding.

Assembling



When assembling ensure that the belt is mounted correctly using the outer and middle belt loops on both sides of the padding.

Do not use the inner loops for mounting the belt. These loops are for mounting the swivelling hip plate.

- (1) Thread the metal buckles and the belt as shown in Fig. 41 through the outer and middle loops of the belt padding.
- (2) Mount the metal buckles in the hip belt slots at the back plate.

4.4.5.3. Options com and mix

In these options the hip belt without additional padding is mounted to the back plate using the hip belt slots (→ Fig. 34).

The hip belt is fixed at the back plate by the back stops.

- (1) Remove a belt buckle at one of the ends of the hip belt.
- (2) Remove the hip belt from the back plate threading the back stops through the mounting slots.



When assembling ensure that the pressure lines are located between the hip belt and the back plate.

Ensure that the belt is fixed correctly by the back stops.

- (3) Assemble in reverse order.

4.4.6. Changing the Cylinder Strap

4.4.6.1. Long Cylinder Strap

Disassembling

- (1) Remove metal bracket from tension lever by slightly spreading it and take it out of belt.
- (2) If necessary, align cylinder separator vertically.
- (3) Thread cylinder strap through cylinder separator.
- (4) Push off adjustable Velcro strap from cylinder strap.
- (5) Thread end of cylinder strap through the back plate and remove cylinder strap from back plate.

Assembling

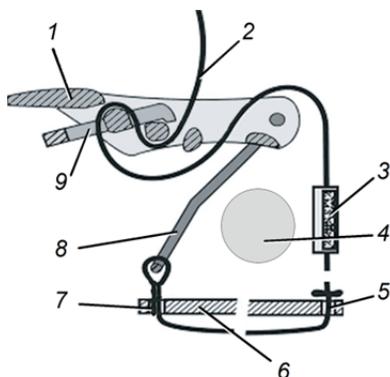


Fig. 42 Long cylinder strap

- | | |
|------------------------------------|-------------------------------------|
| 1 Tension lever | 6 Back plate |
| 2 Cylinder strap | 7 Right hand slot in the back plate |
| 3 Velcro strap | 8 Metal bracket |
| 4 Cylinder | 9 Bracket |
| 5 Left hand slot in the back plate | |

- (1) Thread the cylinder strap (→ Fig. 42) firstly through the slot in the back plate (on the right hand side of the equipment carrier), then through the left hand slot in the back plate and then through the cylinder bracket - align the cylinder bracket vertically.
- (2) Push the Velcro strap onto the cylinder strap with the fluffy side facing outwards

4.4.6.2. Short Cylinder Strap

Disassembling

- (1) Remove metal bracket from tension lever by slightly spreading it and take it out of belt.
- (2) Push off adjustable Velcro strap from cylinder strap.
- (3) Thread end of cylinder strap through the back plate and remove cylinder strap from back plate.

Assembling

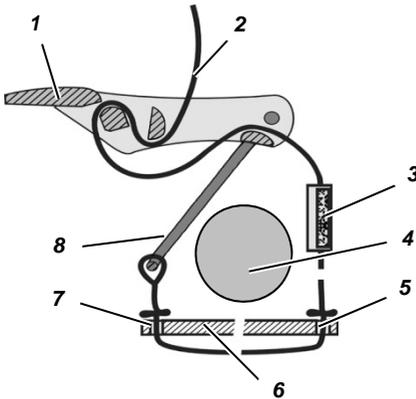


Fig. 43 Short cylinder strap

- | | | | |
|---|----------------|---|-----------------------------------|
| 1 | Tension lever | 5 | Left hand slot in the back plate |
| 2 | Cylinder strap | 6 | Back plate |
| 3 | Velcro strap | 7 | Right hand slot in the back plate |
| 4 | Cylinder | 8 | Metal bracket |

- (1) Thread the cylinder strap (→ Fig. 43) firstly through the slot in the back plate (on the right hand side of the equipment carrier), then through the left hand slot in the back plate and then through the cylinder bracket - align the cylinder bracket vertically.
- (2) Push the Velcro strap onto the cylinder strap with the fluffy side facing outwards.

4.4.6.3. alphaBELT and alphaFP

Information about changing can be found in the alphaBELT und alphaFP operating manuals.

4.5. Visual, Function and Tightness Check

- (1) Visually check the high pressure gaskets (→ Section 4.7).
- (2) Connect compressed air cylinder(s) to the back plate (→ 3.2.1.1 and 3.3).
- (3) Check all parts of the compressed air breathing apparatus for visible defects or malfunctions, such as incorrectly assembled harness, loose compressed air cylinders, incorrectly fitted lines, etc.
- (4) Open cylinder valve(s) and check operating pressure on pressure gauge.
 - The pressure values must read:

for 300 bar cylinders:	minimum 270 bar
for 200 bar cylinders:	minimum 180 bar

- (5) Close cylinder valves.
 - After 60 seconds the pressure drop in the pressure gauge must not exceed 10 bar.
- (6) Check warning device (signal whistle) (→ Section 4.6).

4.6. Checking the Warning Device

- (1) Connect lung governed demand valve to medium pressure line.
- (2) Open cylinder valve(s).
 - The pressure on the pressure gauge must be at least 120 bar.
- (3) Close cylinder valve(s).
- (4) Carefully activate flushing mode of lung governed demand valve (→ Operating Manual for lung governed demand valve)
- (5) Observe the pressure gauge.
 - The warning signal must sound at 55±5 bar.

4.7. Checking the High Pressure Gaskets

Visually check the sealing ring of the cylinder connector in the pressure reducer. Damaged sealing rings must be replaced.

4.8. Changing the Battery *alphaMITTER* / *alphaSCOUT* / *ICU*

Various components are designed for operation with power supplied by batteries. For detailed information of changing the batteries refer to the alpha personal network or ICU Operating Manual.



Attention!

Danger of injury!

There is a danger of explosion since the batteries can cause sparks when being changed!

Never change batteries in hazardous areas.



Used batteries must be returned to the dealer or manufacturer for disposal. They should never be disposed of in household waste.

4.9. Overhaul

The overhaul of the pressure reducer may only be performed by MSA or an authorised service centre.



Attention!

Pressure reducers are completed with a lead seal. Where the lead seal is missing or damaged, it cannot be guaranteed that they are ready for use or that they correspond to the approval status.

Optimal use of the compressed air breathing apparatus is not assured in this case.

4.10. Storage

Store in a dry place, free from dust and dirt, at approx. 20°C. Protect apparatus against direct sunlight.

Secure against tilting, falling down and rolling away. Please, also take into consideration the instructions in the Operating Manual for the compressed air cylinders.

4.11. Malfunctions

In case of malfunctions in the compressed air breathing apparatus, it must be checked and repaired by a person or service centre authorised by MSA.

5. Compressed Air Cylinders with *alphaCLICK 2*

5.1. Changing of Compressed Air Cylinders to *alphaCLICK 2*

All usual compressed air cylinders with standard valve threads [EN 144-2] can be easily equipped with the *alphaCLICK 2* coupling system.

This means they can be used efficiently when combined with compressed air breathing apparatus and uses the advantages of the innovative coupling system.

The *alphaCLICK 2* cylinder adaptor is not equipped with a flow restrictor.



Fig. 44 Changing to *alphaCLICK 2*

- 1 *alphaCLICK 2* cylinder adaptor
- 2 Cylinder valve



Attention!

When changing the compressed air cylinder(s) do not hold on to the handwheel of the cylinder valve.

This could unintentionally open the cylinder valve through which compressed air at high pressure could escape from the cylinder, out of control.

- (1) Check that the cylinder valve is closed.
- (2) Thread the *alphaCLICK 2* cylinder adaptor with a specific torque of 20-30 Nm into the cylinder valve.

5.2. Filling of Compressed Air Cylinders with *alphaCLICK 2*

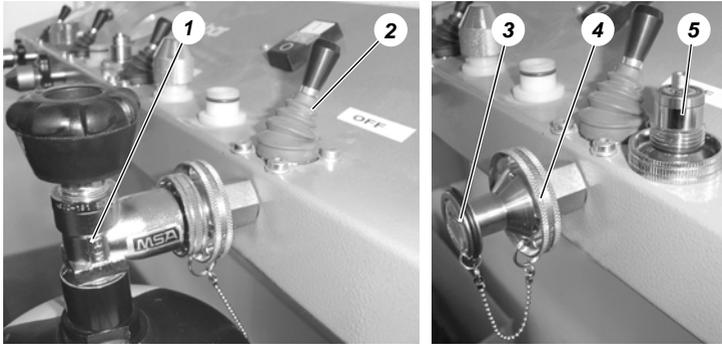


Fig. 45 Filling station for compressed air cylinders with *alphaCLICK 2*

- 1 Compressed air cylinder with *alphaCLICK 2* cylinder adaptor
- 2 Operating lever
- 3 Blind plug
- 4 *alphaCLICK 2* filling coupling
- 5 Cylinder adaptor

With the help of the filling panel, it is possible to fill several compressed air cylinders quickly and safely at the same time. Time-consuming threading-on of compressed air cylinders is no longer required thanks to *alphaCLICK 2*. The compressed air cylinder is simply plugged into the *alphaCLICK 2* filling coupling of the filling panel.

The compressed air cylinders are filled with the help of an operating lever which has to be operated depending on the design of the filling panel for each individual cylinder or centrally for the station.



Attention!

When filling air cylinder(s) using the filling panel, secure non used *alphaCLICK 2* filling couplings with a blind plug.

Do not pressurise a non-used *alphaCLICK 2* filling coupling without a blind plug. This can cause damage to persons and objects.

- (1) Release pressure from the filling panel.
- (2) Remove the blind plug from the *alphaCLICK 2* coupling on the filling panel.
- (3) Attach the compressed air cylinder to the *alphaCLICK 2* coupling and open the cylinder valve.

**Attention!**

When being pressurised, cylinder must not be swivelled, as this can cause damage to the *alphaCLICK 2* filling coupling.

This is particularly important if a water basin for cooling is used while filling.

- (4) Fill the compressed air cylinder using the operating lever.
- (5) Once the compressed air cylinder has been filled, close the cylinder valve.
- (6) Depressurise the connection between the filling panel and the cylinder.
- (7) Turn the handwheel of the *alphaCLICK 2* filling coupling on the filling panel clockwise first and upon reaching the stop, press in the direction of the filling panel.
 - The cylinder adaptor releases from the *alphaCLICK 2* filling coupling.
- (8) Remove compressed air cylinder from the *alphaCLICK 2* filling coupling.
- (9) Secure the *alphaCLICK 2* filling coupling with blind plug.

6. Accessories

6.1. Compressed Air Cylinders

**Danger!**

When handling compressed air cylinders, observe the relevant Operating Manual and the safety instructions specified in it.

Improper handling of compressed air cylinders can have fatal consequences for you and others.

Compressed Air Cylinders

The compressed air breathing apparatus is compatible with a large number of different compressed air cylinders (→ Section 9.3). The MSA compressed air cylinders are made of steel or carbon fibre compound (composite). They are type approved and in accordance with the respective standards.

Applicable national regulations must be observed.

The cylinders must be ordered separately. Protective covers are available for all 6.0 l and 6.8 l composite cylinders (→ Section 9.4) as accessories.

Valves

The cylinder valves that thread into the cylinders are type approved according to EN 144. The handwheels are protected against impacts. They must be fully open for use. The fail safe cylinder valve can be closed only by also pulling the handwheel. This prevents it from closing accidentally.

T-Pieces

The T-pieces allow two compressed air cylinders to be connected to the compressed air breathing apparatus. Depending on the cylinder size, different T-pieces must be used, e.g. the 4l/200 bar steel cylinders require the Ø115/200 bar T-piece; the 6l/300 bar or 6.8l/300 bar composite cylinders require the Ø156/300 bar T-piece. T-pieces must be ordered separately (→ Section 9.4).

6.2. Lung Governed Demand Valves / Full Face Masks

The basic apparatus of the AirGo series are provided for use with various MSA lung governed demand valves and full masks. A list of compatible devices is given under Section 9.2.

7. Technical Specifications and Certifications

High pressure	:	200 bar resp. 300 bar
Medium pressure	:	5 bar to 9 bar
Operating temperature	:	-30 °C to +60 °C
Weight (approx.)	:	2.9 to 3.8 kg
Dimensions (approx.)	:	Length 580 mm
		Width 300 mm
		Height 170 mm

Approvals:

The compressed air breathing apparatus conforms to the Directives below. It is a container unit with compressed air in accordance with EN 137.

PPE	Directive 89/686 EEC or Regulation (EU) 2016/425, respectively		DEKRA EXAM GmbH, Dinnendahlstr. 9, 44809 Bochum (Germany), Notified Body Number: 0158.
			ATEX BVS 05 ATEXH 027 X
ATEX	2014/34/EU		I M1 II 1 G IIC T6 -30°C ≤ Ta ≤+60°C
			II 1 D
PED	2014/68/EU		

The Declaration of Conformity can be found under the following link:
<https://MSAsafety.com/DoC>

Harness Approvals

alpha BELT Pro and Basic

- EN 358 – Holding belts
- EN 1498 – Class B rescue seat (alphaBELT Pro with lanyard)

alphaBELT Lanyard

- EN 358 – Lanyards for holding belts
- EN 795 – Class B anchor point (for 1 person)
- EN 1498 – Class A and C rescue loop

alphaBELT Pro, Basic and Lanyard

- Usable up to a maximum load of 140 kg

alphaFP

- EN 361 (Fall arrest)
- EN 358 (Work Positioning)
- EN 813 (Sit Harness)

8. Notes for Ordering




All the components listed in the table are approved to EN 137 and can be retro-fitted or changed over.

You have the possibility of assembling a compressed air breathing apparatus to match your requirements and demands from the available components by using a configurator.

In order to make your choice easier you also have the option of selecting various different units pre-configured by MSA.

Example of an ATO Ordering Code:

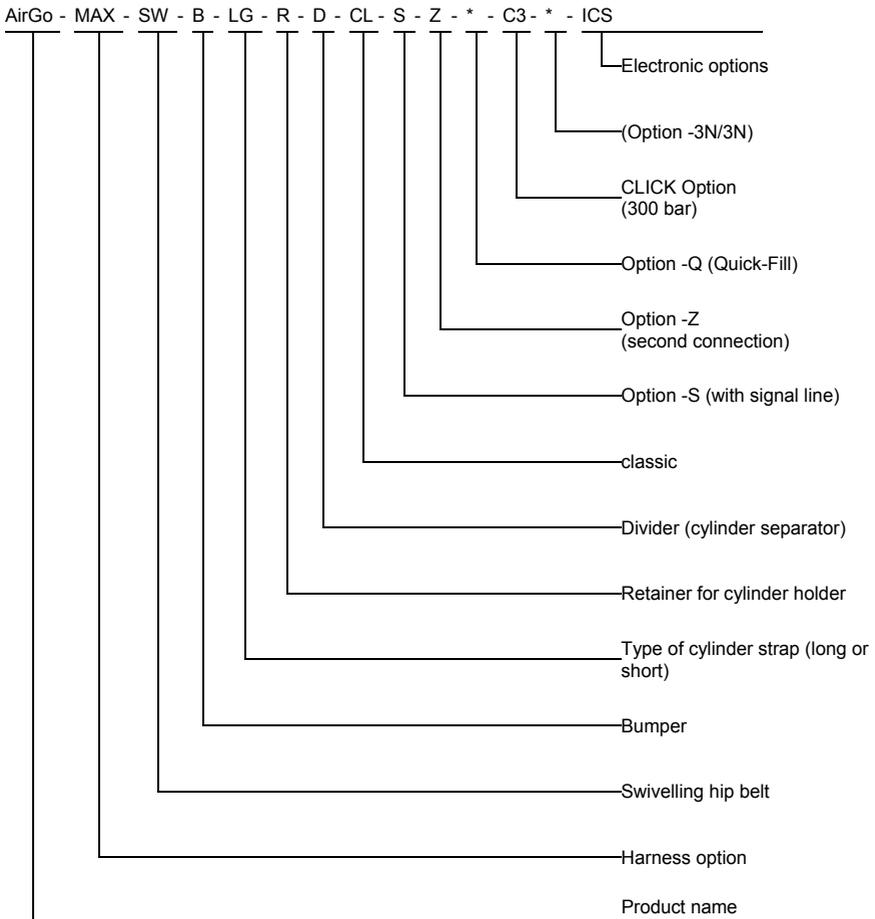

9. Ordering Information

9.1. Compressed Air Breathing Apparatus

Description	Part No.
Basic Apparatus AirGo pro (Preset: configuration AirGo PRO-* -B-LG-R-D-SL-*-*-*-*-* *)	10086571
Basic Apparatus AirGo compact (Preset: configuration AirGoFix COM-* -* -AS-*)	10086572

9.2. Lung Governed Demand Valve

Description	Part No.
Normal Pressure	
AutoMaXX N for full face masks from the 3S, Ultra Elite series	10023686
Positive Pressure Standard Thread Connection M45X3	
AutoMaXX AE for full face masks from the 3S-PF, Ultra Elite-PF, G1 M45x3 series	10023687
Positive Pressure Plug-in Connection ESA	
AutoMaXX ESA for full face masks from the 3S-PF-ESA, Ultra Elite-PF-ESA, G1 PF-ESA series	10043464
Positive Pressure Plug-in Connection AutoMaXX	
AutoMaXX AS for full face masks from the 3S-PS-MaXX, Ultra Elite-PS-MaXX, G1 PS-MaXX series	10023688

Further AutoMaXX versions on request

9.3. Compressed Air Cylinders

Description	Part No.
Compressed Air Cylinders, Steel	
4 litre/200 bar, filled	D5103965
4 litre/200 bar, empty	D5103985
6 litre/300 bar, filled	D5103967
6 litre/300 bar, empty	D5103986
6 litre/300 bar, filled, with flow restrictor	10015960
6 litre/300 bar, filled, with ratchet valve	10024010
Compressed Air Cylinders; Composite	
6 litre/300 bar, filled	D5103947
6 litre/300 bar, empty	D5103976
6.8 litre/300 bar, filled	D5103962
6.8 litre/300 bar, empty	D5103979
6.8 litre/300 bar, filled, with flow restrictor	10015961
6.8 litre/300 bar, filled, with ratchet valve	D5103973
6.8 litre/300 bar, empty, with ratchet valve	D5103980
6,9 l/300 bar, filled	10055167
6,9 l/300 bar, empty	10055168
6,9 l/300 bar, filled, with ratchet valve	10055169
6,9 l/300 bar, empty, with ratchet valve	10055170
6,9 l/300 bar, filled, with flow restrictor	10072889
6,9 l/300 bar, empty, with flow restrictor	10072888

9.4. Accessories

Description	Part No.
T-piece 115/200 bar, for two 4 litre/200 bar cylinders	D4085817
T-piece 156/300, for two 300 bar Composite cylinders	D4075818
Protective cover blue-black for composite cylinders	D4075877
Protective cover yellow for Composite cylinders	D4075878
Quick-Fill line, 1 metre	D4075929
Quick-Fill cylinder adaptor	D4075971
Rescue kit in bag	D4075720
Rescue kit in carry case	D4075723
Rescue grip AirGo/AirMaXX	10152624
Upgrade-kit valve-protection AirGo	10145942
Chest strap	D4075822
Respi-Hood, rescue hood	10045764
Standard medium pressure line	10020783
Protection tunnel BSPP, black, left	10152627-SP
eXXtreme protection tunnel, black, left	10145844
eXXtreme protection tunnel, black, right	10145845
alphaBELT Pro, holding and rescue belt, incl. lanyard	10151246
alphaBELT Basic, positioning belt without lanyard	10151241
alphaBELT Lanyard	10151242
alphaFP basic, standard	10116510
alphaFP basic, large	10117620
alphaFP pro, standard	10116541
alphaFP pro, large	10117573
Small connector loop for SCBA harnesses	10151249
Adaptor quick release buckle to SCBA, 2x	10151248-SP
Tri-Lock steel carabiner	10157585
SingleLineSCOUT with 2 medium pressure connections - without SingleLine	10183243
SingleLine SCOUT - No pressure line, 1 medium pressure connection	10184951

9.5. Work Shop Accessories

Description	Part No.
Open-ended 19 mm spanner for fitting the <i>alphaCLICK</i> to the pressure reducer (for <i>alphaCLICK</i> 1 st generation only)	10075231
Control pressure gauge up to 400 bar cylinder pressure	D4080929
Control pressure gauge (class 1.0) for pressure gauge check (400 bar)	D5175825
Control pressure gauge (class 0.6) for pressure gauge check (400 bar)	D5175867
Control pressure gauge (class 1.6) medium pressure (10 bar)	D5175860
Control pressure gauge (class 0.6) medium pressure (16 bar)	D5175866
<i>alphaCLICK</i> 2 test gauge (up to 400 bar)	10192641
<i>alphaCLICK</i> 2 filling couplings for filling panels 300 bar (set including coupling 300 bar, blind plug, bushings for M 16 x 1.5 and G1/4 threads and seals)	10191332
Filling panels with <i>alphaCLICK</i> 2	on request
Test case Multitest ND	10073519

Notes

For local MSA contacts, please visit us at **[MSAsafety.com](https://www.MSA.com)**