

REMOVABLE CONCRETE ANCHORS

A safe and reliable anchor point for concrete applications.



Installation is as easy as ① ② ③

Step ① | Drill appropriate-size hole into concrete

Step ② | Make sure that the drilled hole is free of debris

Step ③ | Insert the concrete anchor into drilled hole

- ➔ Quickly and easily removed and reinstalled in another location
- ➔ Compact and lightweight
- ➔ Durable stainless steel and aluminum construction
- ➔ 400 pound capacity

New **Removable Concrete Anchors** from MSA are designed for use as anchorage connectors for concrete applications. Suitable for horizontal, vertical, or overhead applications, these anchors are available in a 5000-pound version (5K) and a 10,000 pound version (10K). The 5K version is designed as a single-person anchor point for personal fall protection applications. The 10K version is designed to be used in conjunction with temporary horizontal lifeline systems for up to two workers.



5K Removable Concrete Anchor



10K Removable Concrete Anchor




5K and 10K removable Concrete Anchors for elevated level, concrete work applications. Anchors install easily and can be quickly removed for additional projects.

1.1 5K ANCHORAGE CONNECTOR

- Meets ANSI Z359.1
- 5,000 lbs / 22 kN minimum breaking strength
- Capacity 400 lbs / 149.3 kg
- Materials of construction
 - Main cable: 7x19 aircraft cable
 - End Termination: 304 stainless steel
 - Spoons: 304 stainless steel
 - Bushing guide: 304 stainless steel
 - Stop sleeve: 304 stainless steel
 - Trigger: 6061 T-6 aluminum
 - Spring: zinc-coated steel
 - Swage: zinc-coated copper
 - Return wire: 1x19 aircraft cable
 - Plastics: polyurethane

1.2 10K ANCHORAGE CONNECTOR

- Meets ANSI Z359.1
- 10,000 lbs / 44 kN minimum breaking strength
- Capacity 400 lbs / 149.3 kg when used as a single person anchor
- Materials of construction
 - Main cable: 7x19 aircraft cable
 - Rotary swage: 304 stainless steel
 - Spoons: 304 stainless steel
 - Cleaning bushing: 304 stainless steel
 - Stop sleeve: 304 stainless steel
 - Return wire: 1x19 galvanized cable
 - Trigger: 6061 T-6 aluminum
 - Spring: zinc-coated steel
 - Swage: zinc-coated copper

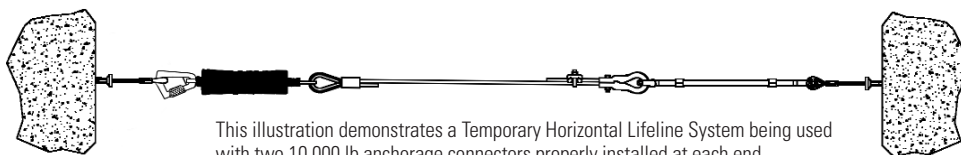

This illustration demonstrates a Temporary Horizontal Lifeline System being used with two 10,000 lb anchorage connectors properly installed at each end.



Ordering information

Part Number	Description
10081594	5K Removable Concrete Anchor
10081570	10K Removable Concrete Anchor

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 2300-111-MC / May 2007
© MSA 2007 Printed in U.S.A.

Corporate Headquarters
P.O. Box 426, Pittsburgh, PA 15230 USA
Phone 412-967-3000
www.MSAnet.com

U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada
Phone 416-620-4225
Fax 416-620-9697

MSA Mexico
Phone 52-55 21 22 5770
Fax 52-55 5359 4330

MSA International
Phone 412-967-3354
FAX 412-967-3451

Offices and representatives worldwide
For further information:

