

# SAFECONNECT™ BELT-BRIDGE with SIRIUS® WIRELESS INTERFACE and SAFECONFIG™ SOFTWARE







Advanced Threat Detection. Superior Protection. Portability. Now, Repeater Expandability from MSA.


The SAFECONNECT™ Belt-Bridge works with the Sirius Detector for integration into the MSA SAFESITE® Multi-Threat Detection System. These new system components offer up to two miles of wireless

communication plus an updated Graphical User Interface (GUI) which provides all mission-critical information in one uncomplicated format.

### SAFECONNECT Belt-Bridge

- ➔ Interfaces wirelessly to existing Sirius Multigas PID Detector
- ➔ Provides GPS location tracking in real time

#### Components Work Together

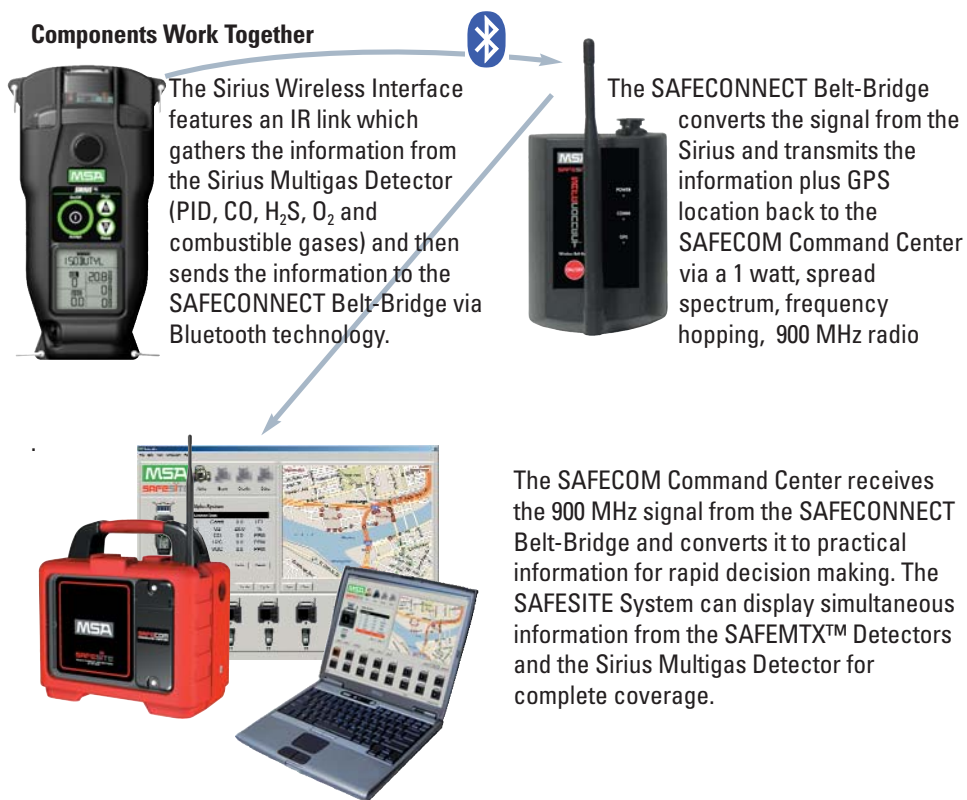

All of these components are designed for integration with MSA's SAFESITE System, combining state-of-the-art detection technologies. The SAFESITE System provides superior preventative and counter-measure solutions for homeland

security and emergency response personnel, public events, building protection, perimeter monitoring, hazardous response, port surveillance and confined space monitoring.

## SAFECONFIG Software

- ➡ Configures SAFEMTX™ Detectors or SAFECONNECT Belt-Bridges as repeaters\*, ensuring maximum signal strength
- ➡ Modifies system assignment of SAFEMTX Detectors
- ➡ Greatly expands detection distance of SAFESITE System



SAFECITY

This illustration demonstrates the benefits of the SAFESITE System with repeater capability.

The SAFECONFIG works in conjunction with the SAFECOM Command Center of the SAFESITE System. The SAFECONFIG Software enables the user to reconfigure SAFEMTX instruments as repeaters, giving the user maximum flexibility in the deployment of the SAFESITE System.

- 1 SAFECOM Command Center receives and displays complete information from all detectors.
- 2 SAFEMTX Detector communicates directly to SAFECOM.
- 3 SAFEMTX Detector configured as Repeater #1, communicates directly to SAFECOM.
- 4 SAFEMTX Detector configured as Repeater #2, transmits through Repeater #1, then to SAFECOM.
- 5 SAFEMTX Detector communicates to SAFECOM through Repeater #2, then Repeater #1.
- 6 Sirius Wireless Interface with SAFECONNECT Belt-Bridge communicates to SAFECOM through Repeater #1.
- 7 SAFEMTX Detector communicates to SAFECOM through Repeater #2, then Repeater #1.

*\*Repeater function with MTX does not eliminate units ability to monitor the environment.*

### Specifications: SAFECONNECT™ Belt-Bridge

<b>Size</b>	6.5"x4.5"x2.5"
<b>Weight</b>	1.2 lbs
<b>Ingress Protection Rating</b>	IP54
<b>Temperature</b>	-20 to +50C (-4 to +122F)
<b>Humidity</b>	Operating humidity range 0-95% RH, non-condensing
<b>Wireless Interface</b>	902 - 928 MHz, 1 watt, spread spectrum, frequency-hopping radio
<b>Communication Range</b>	2 miles line-of-site back to command station
<b>GPS Location</b>	Standard
<b>Battery Type</b>	4 AA NiMH rechargeable or alkaline batteries
<b>Battery Charge Time</b>	15 minutes
<b>Battery Runtime</b>	12 hours nominal
<b>Warranty</b>	One year parts and labor standard

### Specifications: Sirius® Wireless Interface

<b>Size</b>	3.5"x2.1"x1.0"
<b>Weight</b>	0.15 lbs
<b>Ingress Protection Rating</b>	IP54
<b>Temperature</b>	-20 to +50C (-4 to +122F)
<b>Humidity</b>	Operating humidity range 0-95% RH, non-condensing
<b>Wireless interface</b>	Bluetooth technology
<b>Communication Range</b>	6 feet to SAFECONNECT Belt-Bridge
<b>Battery Type</b>	CR2477 1000mAH replaceable coin cell
<b>Battery Runtime</b>	18 months (50 hours per week operation)
<b>Warranty</b>	One year parts and labor standard

### Ordering Information

<b>Part Number</b>	<b>Description</b>
10071439	SAFECONNECT Belt-Bridge Assembly
10073837	Sirius Wireless Kit, includes extended boot and wireless module
10073312	SAFECONFIG Installation Software



The SAFECONNECT Belt-Bridge can be worn over the shoulder for convenient hands-free operation.

**Note:** This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 07-2124-MC / Oct 2006  
© MSA 2006 Printed in U.S.A.

**Corporate Headquarters**  
P.O. Box 426, Pittsburgh, PA 15230 USA  
Phone 412-967-3000  
[www.MSAnet.com](http://www.MSAnet.com)

**U.S. Customer Service Center**  
Phone 1-800-MSA-2222  
Fax 1-800-967-0398

**MSA Canada**  
Phone 416-620-4225  
Fax 416-620-9697

**MSA Mexico**  
Phone 52-55 21 22 5770  
Fax 52-55 5359 4330

**MSA International**  
Phone 412-967-3354  
FAX 412-967-3451

Offices and representatives worldwide  
For further information:

**MSA**  
The Safety Company