

Fall Protection Products for  
**Welding & High Heat Applications**



*Because every life has a **purpose...***

# Fall Protection Products for **Welding & High Heat Applications**

## Gravity™ Welder Harnesses

- Kevlar/Nomex blend webbing is resistant to chemicals, weld splatter, and other high-heat applications



Gravity Welder  
Harness  
Part No. 10103216


Gravity Thermatek  
Harness  
Part No. 10020062

PART NO.	D-Ring Configuration		Size				Leg Buckle Type		Webbing Color		Standards	
	Back	Back, Hips	XSM	STD	XLG	SXG	Quick-Fit	Quick-Connect	Green	Black	OSHA/ ANSI/CSA	ANSI/ OSHA
Thermatek Welder Harness												
10020067		■	■				■		■		■	
2 10020062		■		■			■		■		■	
10020066		■			■		■		■		■	
10020065		■				■	■		■		■	
Gravity Welder Harness												
10103213	■		■				■			■		■
1 10103216	■			■			■			■		■
1 10103217	■				■		■			■		■
10103218	■					■	■			■		■
10148485	■			■				■		■		■
10151154		■		■			■			■		■

## Thermatek® Energy-Absorbing Lanyards

Specially designed for high-heat applications, Thermatek® Energy-Absorbing Lanyards feature a Tuffweld protective cover over the energy-absorber and a Kevlar back-up strap inside the energy-absorbing pouch. Energy Absorbing Lanyards connect the back D-ring of MSA full-body harnesses to a qualified anchorage and anchorage connector. The energy absorber keeps fall arrest forces and deceleration distances within the limitations set by ANSI, CSA, and OSHA.

- Designed to hold up to heat and for use in the welding industry
- Tuffweld protective cover that is superior to Nomex
- Kevlar back-up strap is resistant to charring and burning
- Thermatek 12 lanyard model arrests a free-fall up to 12 feet and keeps fall arrest forces below OSHA limits
- Available in Kevlar web

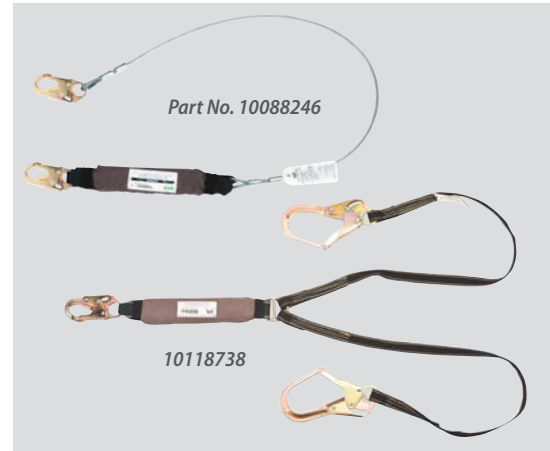

### Thermatek Cable Energy-Absorbing Lanyard Ordering Information

PART NO.	Harness Connection	Anchorage Connection	Type				Length		Standards		
			Single-Leg	12' Freefall	Heavy Worker	E6 Heavy Worker	5 ft	6 ft	ANSI Z359.13	CSA Z259.11	OSHA
1 10023485	36C	36C	■					■			■
10026060	36C	36C	■	■							■
10027104	36C	36C	■				■				■
2 10088246	36C	36C	■					■	■		■
10088247	36C	36C	■	■							■
10088248	36C	36C			■			■			■
10118812	36C	36C				■		■		■	

### Thermatek Web Energy-Absorbing Lanyard Ordering Information

PART NO.	Harness Connection	Anchorage Connection	Type			Standards		
			Fixed	Single-Leg	Twin-Leg	ANSI Z359.13-2007	CSA Z259.11-05E4	OSHA
10106935	36C	36C	■	■				■
10107853	36C	(2) 36C	■		■			■
10118737	36C	36CL	■	■				■
10118738	36C	(2) 36CL	■		■			■





## Kevlar Diamond™ Energy-Absorbing Lanyards

Raising the standard for energy-absorbing lanyards, the Diamond Energy-Absorbing Lanyard's light weight and streamlined design contains a strong and durable polyester sheath that's abrasion and UV-resistant. Diamond Energy-Absorbing Lanyards connect the back D-ring of MSA full-body harnesses to a qualified anchorage and anchorage connector. The energy absorber keeps fall arrest forces and deceleration distances below ANSI, CSA, and OSHA limits.

- Keeps average fall arrest forces below 900 lbs
- Durable polyester sheath for increased abrasion and UV resistance
- Highly visible deployment tag
- Pouchless design for lighter weight and comfortable wear
- Single- and twin-leg configurations
- Single leg Diamond is bi-directional to make training easier
- Twin leg Diamond allows for 100% tie off



PART NO.	Harness Connection	Anchorage Connection	Material		Type				Length (ft)					Standards			
			Polyester	Kevlar	Single-Leg	Twin-Leg	Triple-Leg	Expanyard	4	4.5	5	6	10	ANSI 359.13	CSA Z259.11	OSHA	
10125910	36C	36C		■	■								■		■		■
10125921	36C	36CL		■	■								■		■		■
10125922	36CS	(2) 36C		■		■							■		■		■
10125923	36CS	(2) 36CL		■		■							■		■		■

## Kevlar Anchorage Connector Strap

- Anchorage Connector Strap provides a temporary means of connecting to an anchor point

ANCHORAGE CONNECTOR STRAP	10023487	Anchorage connector strap, Kevlar web
---------------------------	----------	---------------------------------------



**Need it NOW!** is our fall protection delivery program that's designed to get you the products you need, when you need them — **NOW!**

Products included in this program are identified by the following symbols: **1** **2**

**1** denotes Tier I product status (same day or next-day shipping) with a maximum order quantity of 100 units for priority shipping.

**2** denotes Tier II product status (shipping within 5 days) with a maximum order quantity of 100 units for priority shipping.

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 2300-31-MC / Sept 2013  
© MSA 2013 Printed in U.S.A.

**MSA Corporate Center**  
1000 Cranberry Woods Drive  
Cranberry Township, PA 16066 USA  
Phone 724-776-8600  
[www.MSAsafety.com](http://www.MSAsafety.com)

**U.S. Customer Service Center**  
Phone 1-800-MSA-2222  
Fax 1-800-967-0398

**MSA Canada**  
Phone 1-800-672-2222  
Fax 1-800-967-0398

**MSA Mexico**  
Phone 01 800 672 7222  
Fax 52 - 44 2227 3943

**MSA International**  
Phone 724-776-8626  
Toll Free 1-800-672-7777  
Fax 724-741-1559

**Offices and representatives worldwide**  
For further information: