


# MSA Gas Detection System

## Ultima X Gas Monitor Series for HF Monitoring



### Hydrogen Fluoride (HF)

Hydrogen Fluoride (HF) is a common industrial compound used in various applications, such as glass etching, refining, brass and crystal cleaning, as well as manufacturing of fluorine, refrigerants, ceramic steel, silicon semiconductor chips, and automotive cleaning products. Other uses for HF are found in commercial rust removal, metallurgy, oil exploration, electroplating, and dental laboratories.

HF is non-flammable, highly corrosive and very toxic gas with a pungent odor. It reacts readily with water (including humidity) to form hydrofluoric acid, which is highly irritating to the skin, eyes and respiratory tract. Exposure to HF can also result in heart damage, joint pain, bone decalcification, and corrosion of the esophagus. Injury from HF can occur due to accidental splash or other skin contact as well as gaseous exposure.

### MSA HF Sensor Performance

- Detection well below the ACGIH 3 ppm ceiling value for HF
- Fast, reliable detection
- Easy calibration with SO<sub>2</sub> span gas cylinder (MSA P/N 10028070)

**With the Ultima X Series Monitors, you are assured of the latest sensing technology from an industry leader with more than 90 years of experience.**

**Product Description**


MSA's Ultima X Series Gas Monitors, for the detection of oxygen, combustible and toxic gases, feature:

- Sensor disconnect-under-power without declassifying a hazardous area
- Interchangeable smart sensors; no reconfiguration required
- Advanced LCD display; detailed, scrolling messages
- Alternating display for sensor reading and gas type
- One circuit board; increased reliability, and easier serviceability
- Optional relay contacts for Fault and three level of Alarm

**MSA Ultima X Sensor Specifications**

Gas Types	Combustible, oxygen, toxics
Power Input	8-30VDC (oxygen and toxics) 8-30VDC @ 450mA maximum (combustibles)
Signal Output	4-20mA 2-wire current sink 4-20mA 2-wire current source HART
Hydrogen Fluoride (HF) Sensor Performance	Range 0–10 PPM Display Resolution 0.1 PPM Detection Limit 0.2 PPM Response Time T50 <25 Secs., T90 < 75 Secs. (SO <sub>2</sub> span gas) Operating Temperature Range: -0°C to +40°C (32°F to +104°F) Extended Temperature Range: -20°C to +40°C (-4°F to +104°F)

*Note: This is a representative description of this product and its possible applications. Contact MSA Custom Products at [custom\\_products@msanet.com](mailto:custom_products@msanet.com) for information on customizing this unit to fit a specific need.*

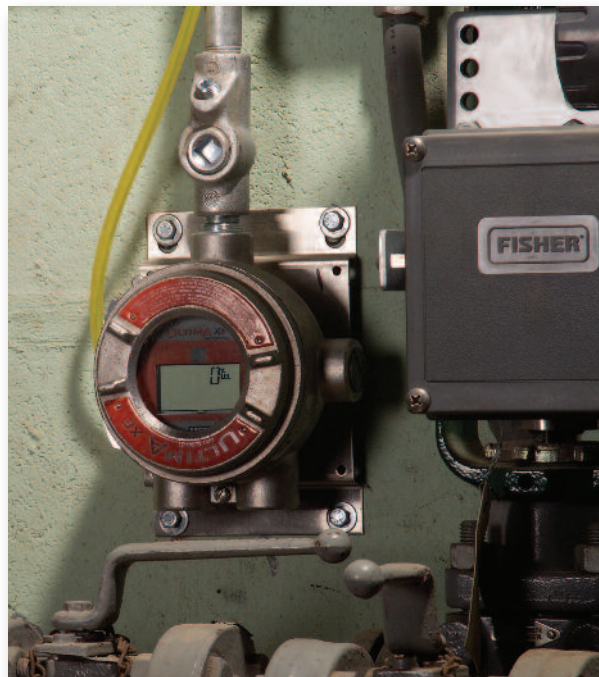

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



**ID 07-2075-MC / Jul 2011**  
© MSA 2011 Printed in U.S.A.

**MSA Corporate Center**  
1000 Cranberry Woods Drive  
Cranberry Township, PA 16066 USA  
Phone 724-776-8600  
[www.MSANet.com](http://www.MSANet.com)

**U.S. Customer Service Center**  
Phone 1-800-MSA-INST  
Fax 1-800-967-0398

**MSA Canada**  
Phone 1-800-MSA-INST  
Fax 1-800-967-0398

**MSA Mexico**  
Phone 01 800 672 7222  
Fax 52 - 44 2227 3943

**MSA International**  
Phone 724-776-8626  
Toll Free 1-800-672-7777  
Fax 724-741-1559

**Offices and representatives worldwide**  
For further information:

