
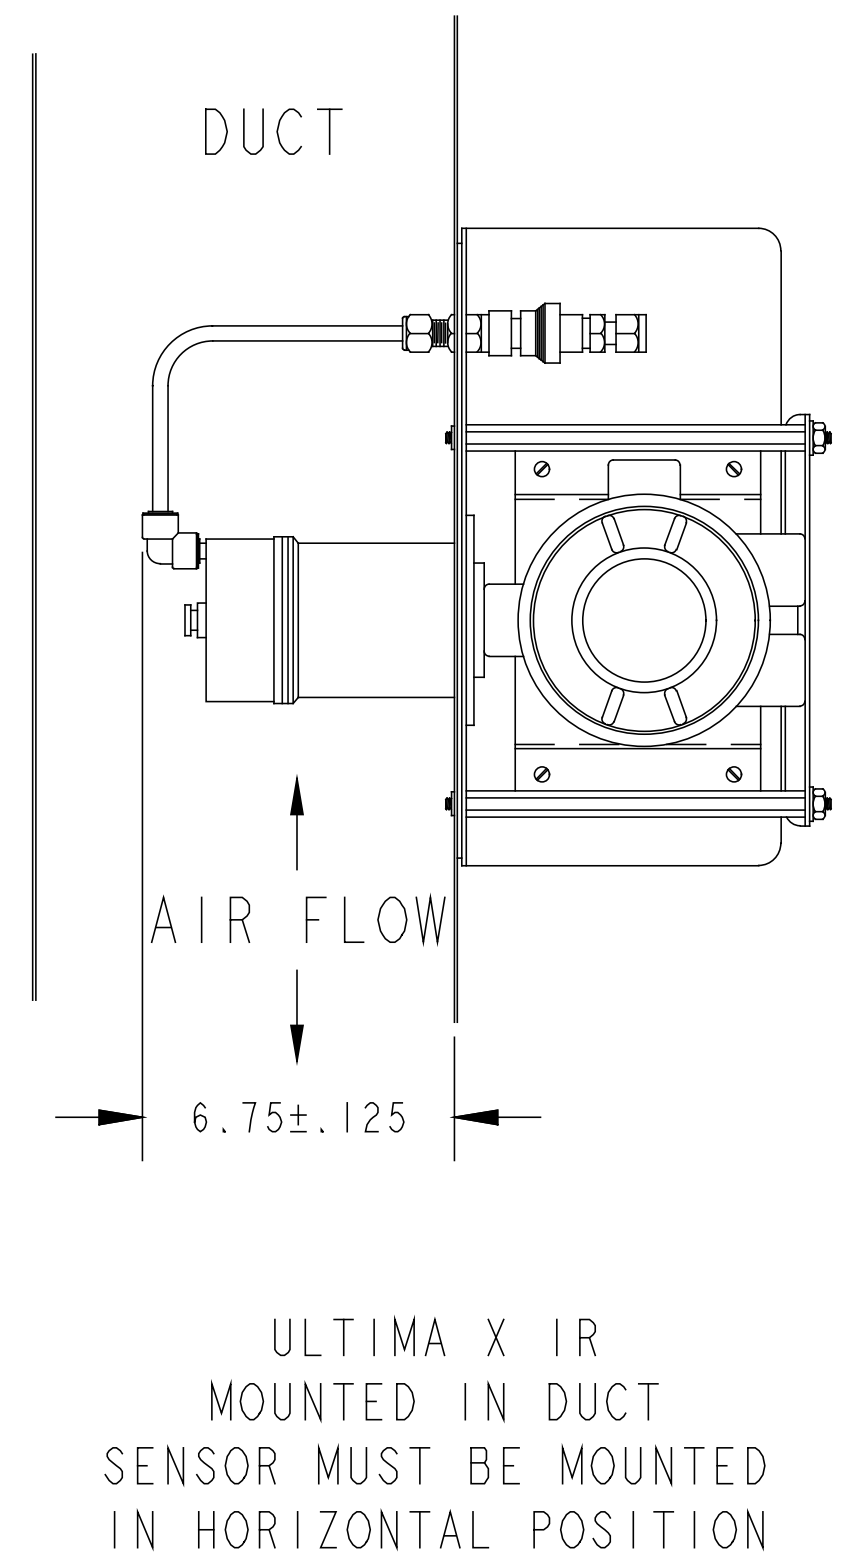


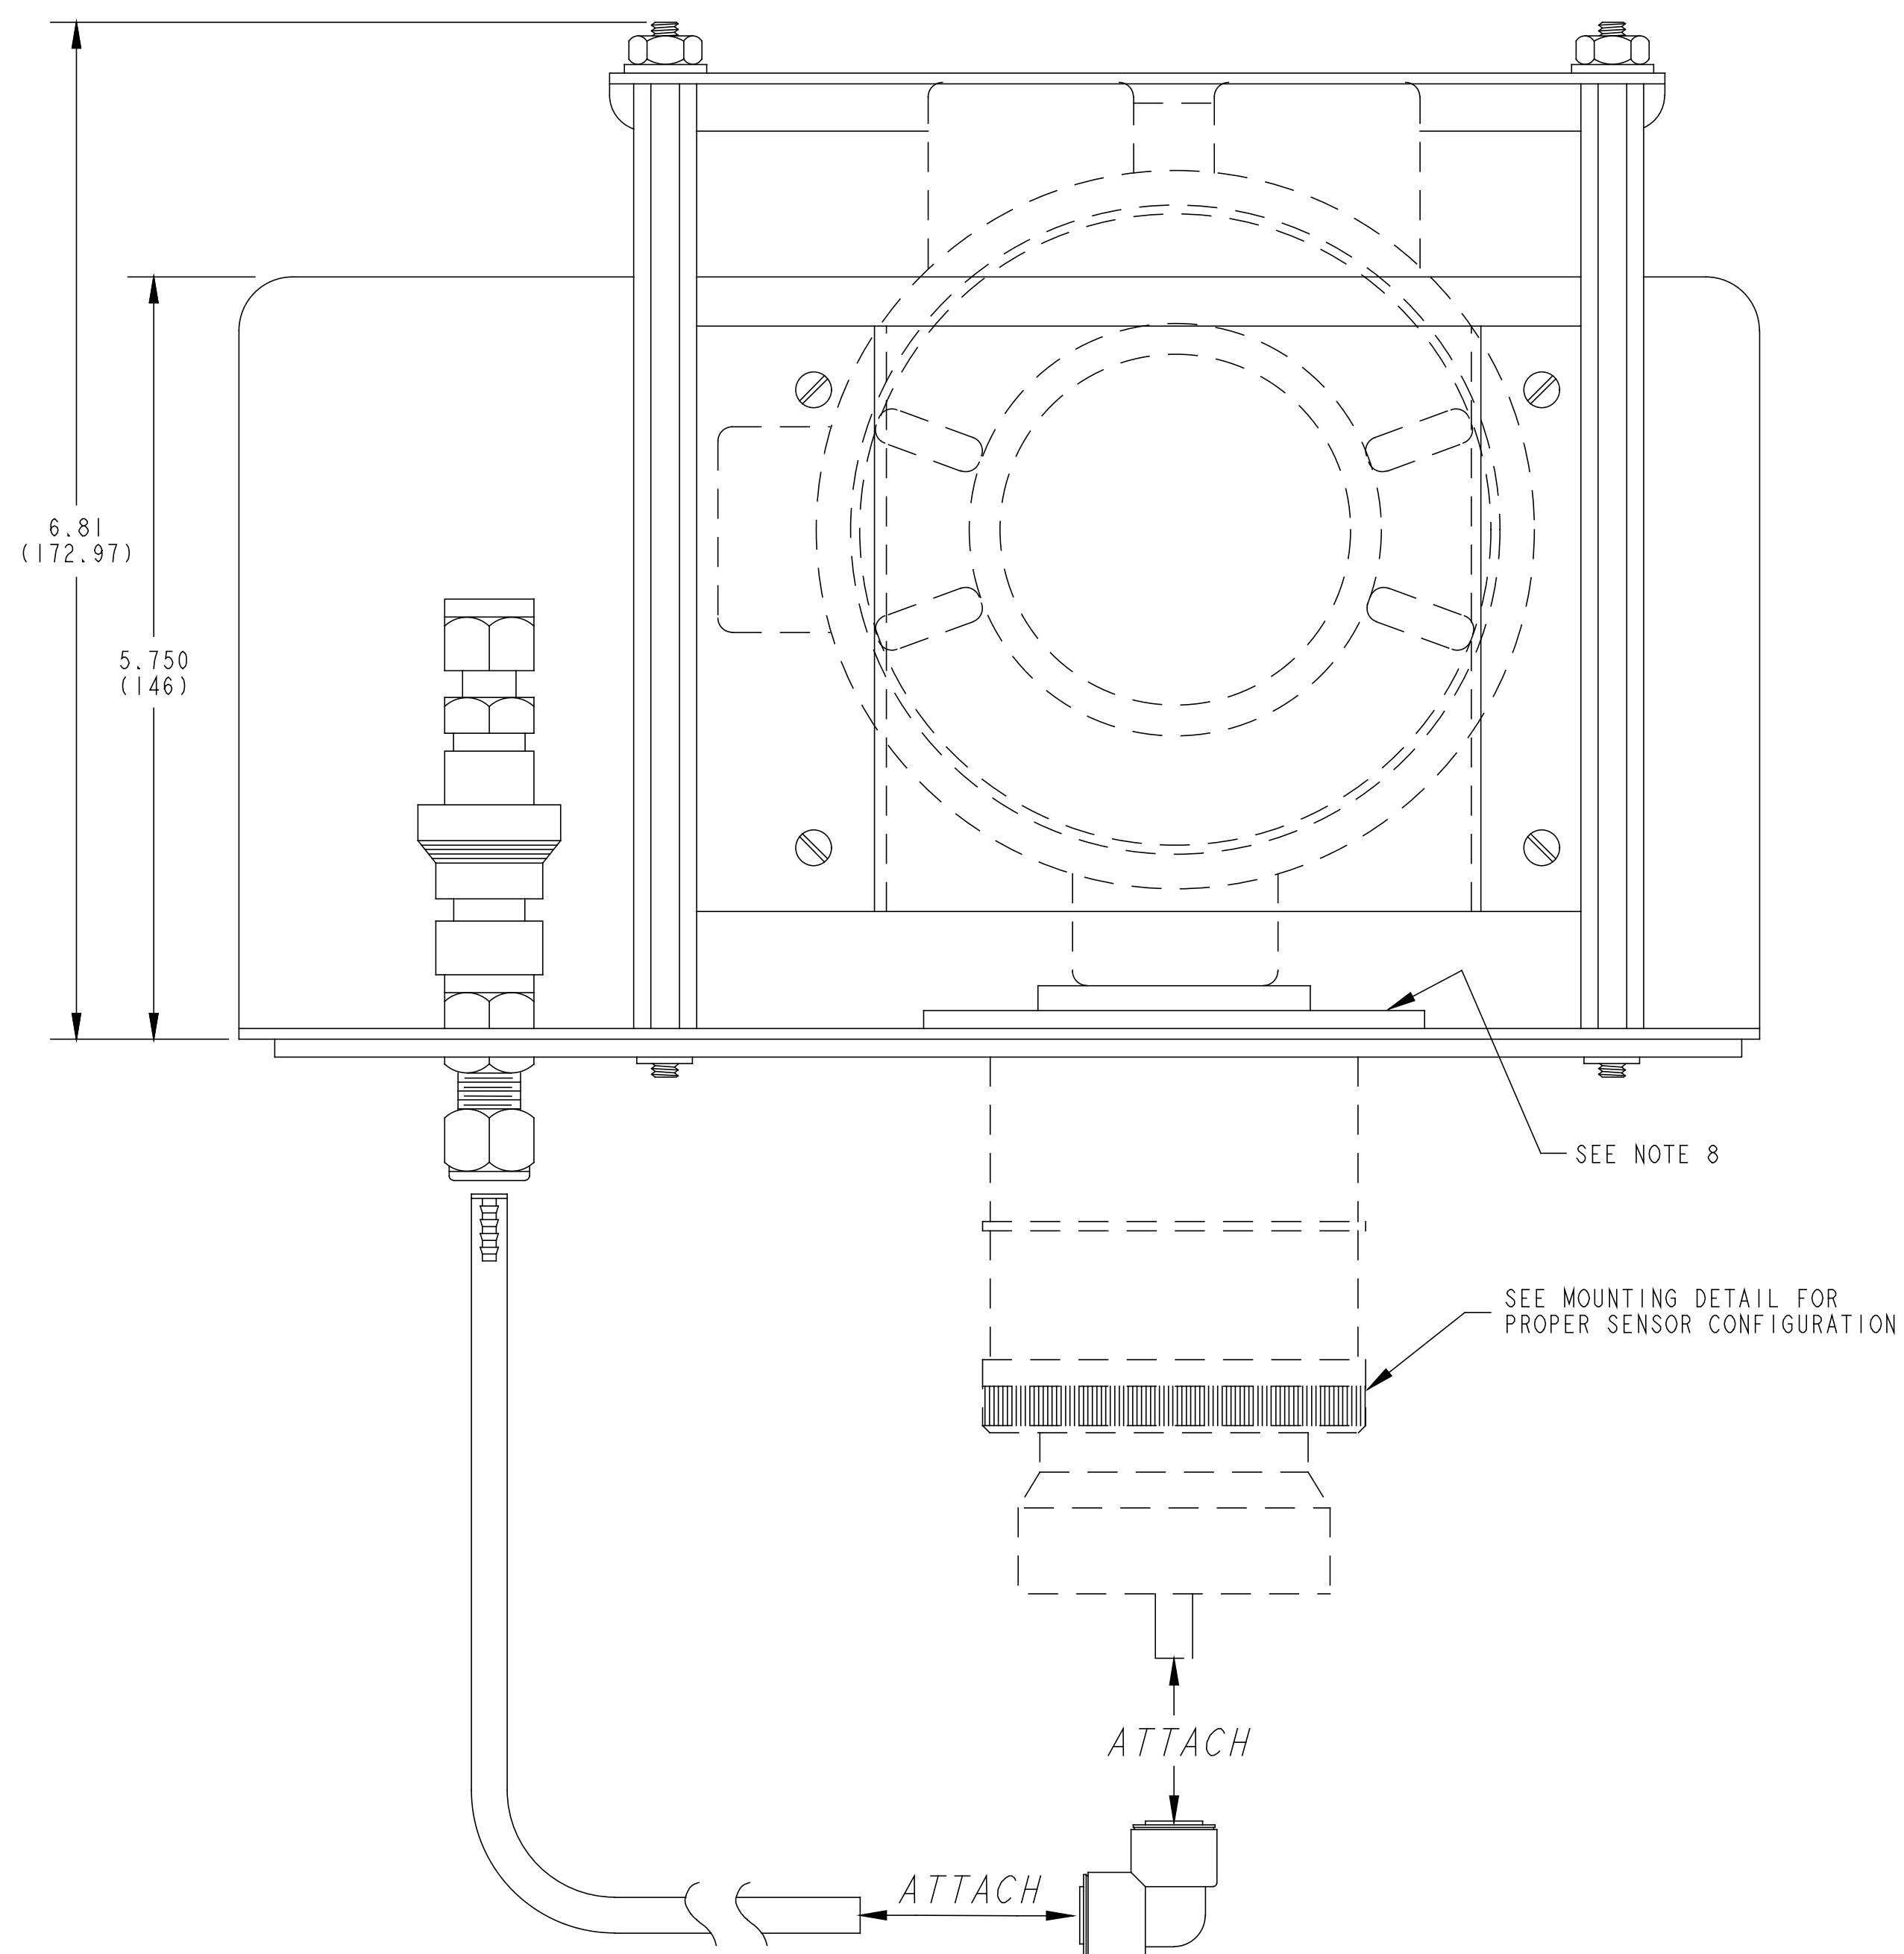

NOTES:

1. CUSTOMER MUST PROVIDE FLEXIBLE WIRING CONNECTION TO CONDUIT TO RELIEVE STRAIN.
2. DIMENSIONS SHOWN IN INCHES AND (MILLIMETERS).
3. APPROX. WEIGHT 15 LBS. (6.8 KILOGRAMS)
4. DUCT KIT IS STAINLESS STEEL CONSTRUCTION WITH STAINLESS STEEL HARDWARE.
5. CONDULET AND SENSOR ARE NOT INCLUDED IN THE KIT.
6. REFER TO MANUAL 10042446.
7. TEMPERATURE RANGE -40° TO +194° F.
8. USE SENSOR PLATE AND GASKET AS PROVIDED IN KIT.

AUTHORIZED COUNTRY	MSA	MINE SAFETY APPLIANCES CO. PITTSBURGH, PA 15230, USA	THIS DRAWING IS THE PROPERTY OF MSA AND IS MADE AVAILABLE TO YOU IN CONFIDENCE AND SUBJECT TO THE FOLLOWING: NO PERMISSION IS GRANTED TO PUBLISH, USE, REPRODUCE, TRANSMIT OR DISCLOSE THIS DRAWING, OR ANY INFORMATION CONTAINED THEREIN TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF MSA EXCEPT FOR THE MANUFACTURE OF ARTICLES FOR MSA. SCHUTZVERMERK NACH DIN 34 BEACHTEN, MSA AUER GmbH.		DO NOT SCALE DWG.
	MSA STANDARD SHOP PRACTICES APPLY		APPROVAL AGENCY CODE: NO NIOSH ATTR. DOC.: .		
	CODE SYMBOLS	JOB NO. 30005163 PH730	INSTALLATION OUTLINE, DUCT MOUNT KIT, SENSOR, ULTIMA X		
	CRITICAL	DRAWN BY DATE			
	MAJOR A	BP 3-8-2004			
	MAJOR B	CHECKED BY S. TURNER 7-8-2004			
	100 % INSPECTION	PROJ. ENGR. D. BRUCE 7-8-2004			
	TOLERANCES UNLESS OTHERWISE SPECIFIED	QUALITY ASSURANCE J. DANNHARDT 7-15-2004			
	FRACTIONAL ± 1/64	MANUFACTURING			
	2 PL DEC. ± 0.01	D. ALWARD 7-8-2004	CADD REF: NO MODEL AVAILABLE		SCALE: 1.00
	3 PL DEC. ± 0.005				
	ANGULAR ± 1 deg.				
	SEE MSA STANDARD SHOP PRACTICES FOR DRILLED HOLES TO TOLERANCE	D SK	DOCUMENT NO. 10000019218		SHEET 1 OF 1