

Workman® Tripod Assembly and Use Instructions



1. MOUNT WORKMAN RESCUER TO TRIPOD HEAD

Lie Workman Rescuer on ground to right side (when facing leg) of any leg and extract about 2.7m of line. Place cable on split-mount pulley and using karabiner, mount pulley onto tripod head to the RIGHT of the leg to which the Rescuer will be mounted.

Note: Workman Rescuer snaphook must hang to interior of tripod



2. MOUNT WORKMAN WINCH TO TRIPOD HEAD


Lie Workman Winch on the ground to the right side (when facing leg) of any leg and extract about 2.7 m of line. Place cable on split-mount pulley and using karabiner, mount pulley onto the CENTRE EYE only of the tripod head.

Note: Workman Winch snaphook must hang to on the opposite to side of where the Workman Winch is mounted.



3. RAISE TRIPOD TO THE DESIRED HEIGHT

Remove pins from all 3 legs. Raise tripod to desired working height. Maximum tripod height is reached when MAX line is visible on lower tripod leg. Insert Pins into each leg once tripod reaches desired height. Ensure that top of tripod head is level.

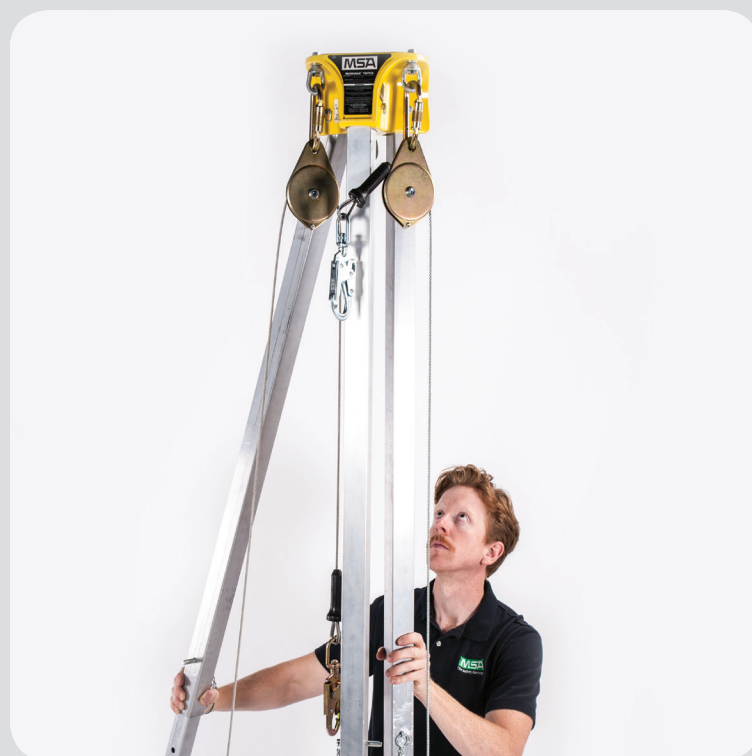

4. PULL LEGS OUTWARDS, THEN LOCK

Tilt tripod into upright, feet-down position. Pull each leg outward and lock into position. Position feet around hatch cover in accordance with work area geometry and surface conditions.



5. ATTACH RESCUER

Partially remove pin from leg where Workman Rescuer will be installed. Pin should only be removed far enough so that it does not protrude onto legs opposite side. Do not fully remove pin. Mount Workman Rescuer onto tripod leg by placing mounting bracket slot under partially removed pin on tripod leg. Fully insert tripod leg pin at this time.



6. ATTACH WORKMAN WINCH

Partially remove pin from leg where Workman Winch will be installed. Pin should only be removed far enough so that it does not protrude onto legs opposite side. Do not fully remove pin. Mount Workman Winch onto tripod leg by placing mounting bracket slot under partially removed pin on tripod leg. Fully insert tripod leg pin at this time.



7. FINAL ADJUSTMENTS

Tighten leg base support strap. Check all pins to ensure that they are fully inserted and secure. Check tripod foot traction and overall tripod stability.

CAUTION: Do not open confined space access cover before completing installation of Workman Tripod and all other systems.