

Workman[®] Reusable Roof Anchor




Whether your roof is flat or sloped,
the Workman Reusable Roof Anchor is the perfect fit.

Features include:

- ➔ Meets ANSI Z359.1-2007
- ➔ Center holes are offset to reduce possibility of truss splitting during installation
- ➔ Can be used off roof peak in flat position without compromising strength
- ➔ Can be used with screws or nails
- ➔ Fits any wooden roof up to 12/12 pitch
- ➔ Standard product includes fastening hardware
- ➔ 400-pound maximum worker capacity
- ➔ Available with labels and user instructions in English & Spanish



MSA
The Safety Company

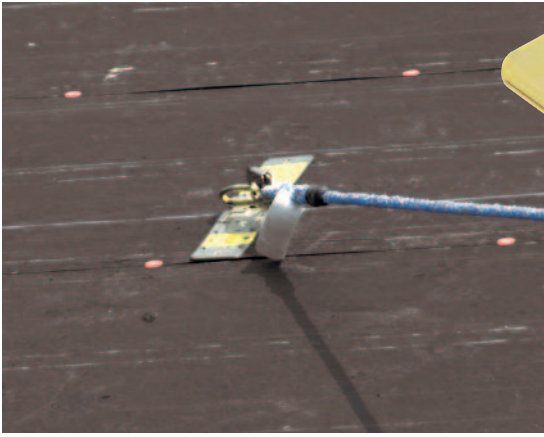

Reusable Roof Anchor installed off roof peak



Reusable Roof Anchor installed at peak



SPECIFICATIONS

Material type: Zinc-plated carbon steel

Net weight: 2.1 pounds

Dimensions: 18.4" L x 3.0" W x 2.9" H (46.7cm x 7.6cm x 7.4cm)

Approvals: *With nails*
ANSI A10.32-2004, OSHA 1926.502

With screws
ANSI Z359.1-2007, ANSI A10.32-2004, OSHA 1926.502

PART NO.

DESCRIPTION

10102686	Workman Reusable Roof Anchor with 12 mounting screws
----------	--

Note: this bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 2302-43-MC / July 2009
© MSA 2009 Printed in U.S.A.

Corporate Headquarters
P.O. Box 426, Pittsburgh, PA 15230 USA
Phone 412-967-3000
www.MSAnet.com

U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada
Phone 1-800-672-2222
Fax 1-800-967-0398

MSA Mexico
Phone 01 800 672 7222
Fax 52 - 44 2227 3943

MSA International
Phone 412-967-3354
FAX 412-967-3451

Offices and representatives worldwide

For further information:

