

Workman[®] Twin Leg Personal Fall Limiter

- Intuitive, fast connection to harness
- 100% tie-off
- Lightweight design



MSA
The Safety Company

Patent-pending ARCA™ Harness Connection

- Intuitive design allows for fast and easy connection to harness back D-ring.
- Locking cams move in opposite directions to prevent accidental disengagement.
- Cam guards help to prevent unintentional contact with cams.
- Dual cams provide redundancy to increase security and safety.



RFID-enabled

- Provides easy, paperless means of tracking and inspecting product.

400-lb. working capacity

- Reduces complexity of product selection.

Maximum arrest distance is 42"

- Great for use in low clearance applications.

Fall arrest forces limited to 900 lbs

- Reduces impact upon users.





Two modes of use

- Lifelines extending upwards for connection points above the harness back D-ring.
- Lifelines extending downward for connection points level with or below the harness back D-ring.

6-ft lifeline length

- To achieve required mobility.

Two accessory lanyard keepers are included for lifeline stowage when not in use.

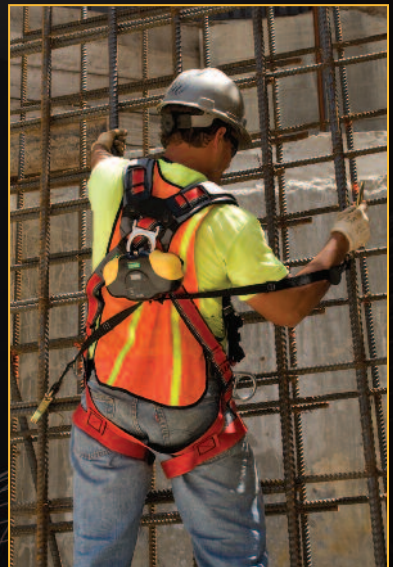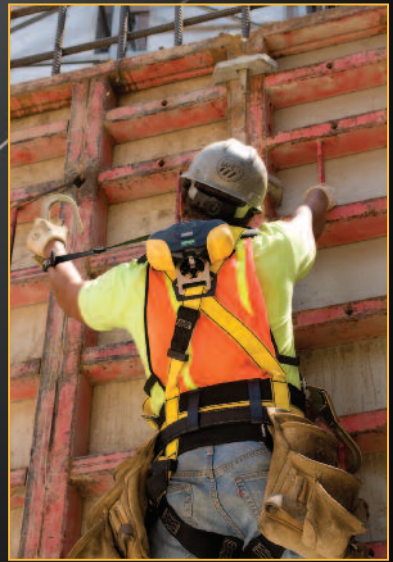

Integral load indicators

- Alert user that product has been involved in a fall and must be removed from service.



Snaphook options

- Ensure compatible connections for your application.



Tie-back models

- Eliminate the need for a separate anchorage connector.



Impact-absorbing protective bumpers

- Improve durability.

Robust thermoplastic housing

- Reduces weight.
- Increases service life.



Scan this QR code for
more information.



ID 2301-103-MC / Feb 2012
© MSA 2012 Printed in U.S.A.

MSAsafety.com/TwinLegPFL

MSA
The Safety Company