

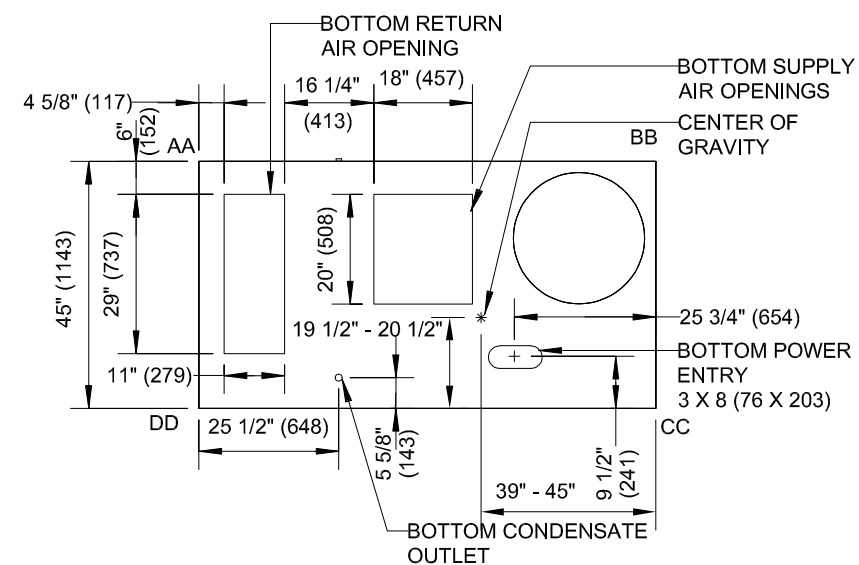
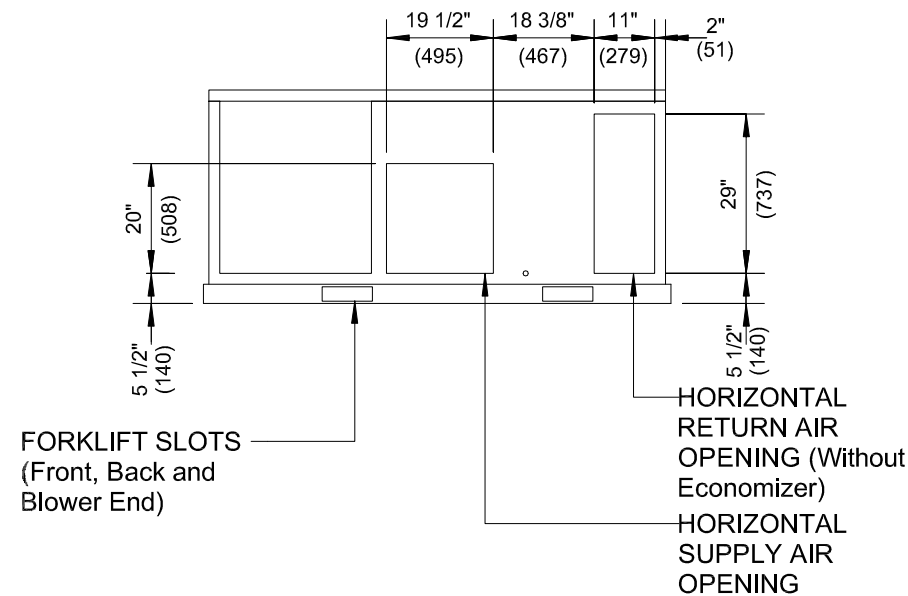
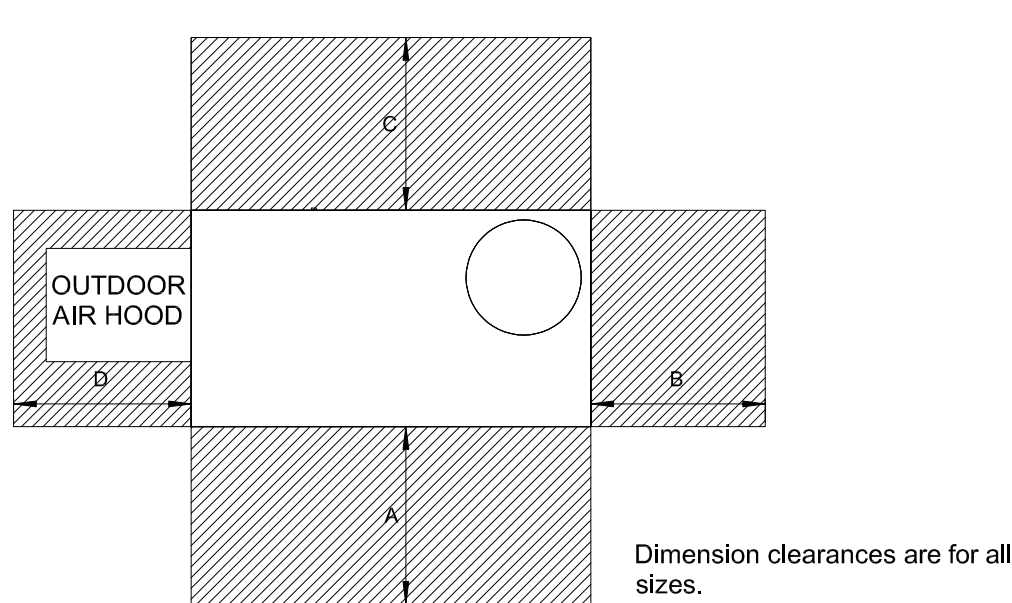


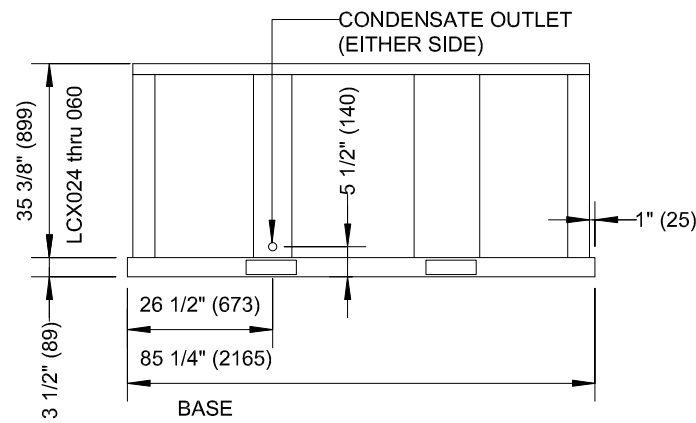

FRONT VIEW
HORIZONTAL OPENING

TOP VIEW


1 Unit Clearance	A		B		C		D		Top Clearance
	in.	mm	in.	mm	in.	mm	in.	mm	
Service Clearance	36	914	36	914	36	914	36	914	Unobstructed
Minimum Operation Clearance	36	914	36	914	36	914	36	914	

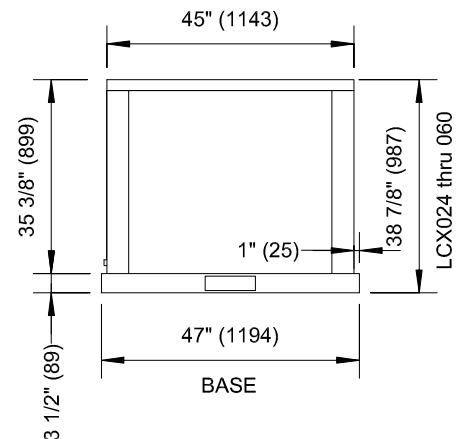

END VIEW

SIDE VIEW

NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.
1 Service Clearance - Required for removal of serviceable parts.
Minimum Operation Clearance - Required clearance for proper unit operation.

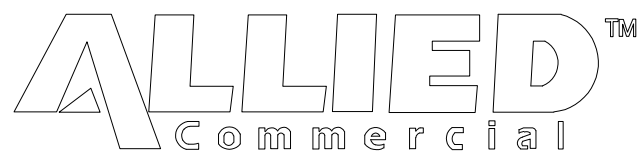

K-Series Packaged Electric/Electric Rooftop Units

Series: K-Series	Nominal Cooling Capacity (Tons): 2-6 Ton
Model: LCX	

LCX

Scale: N.T.S.