

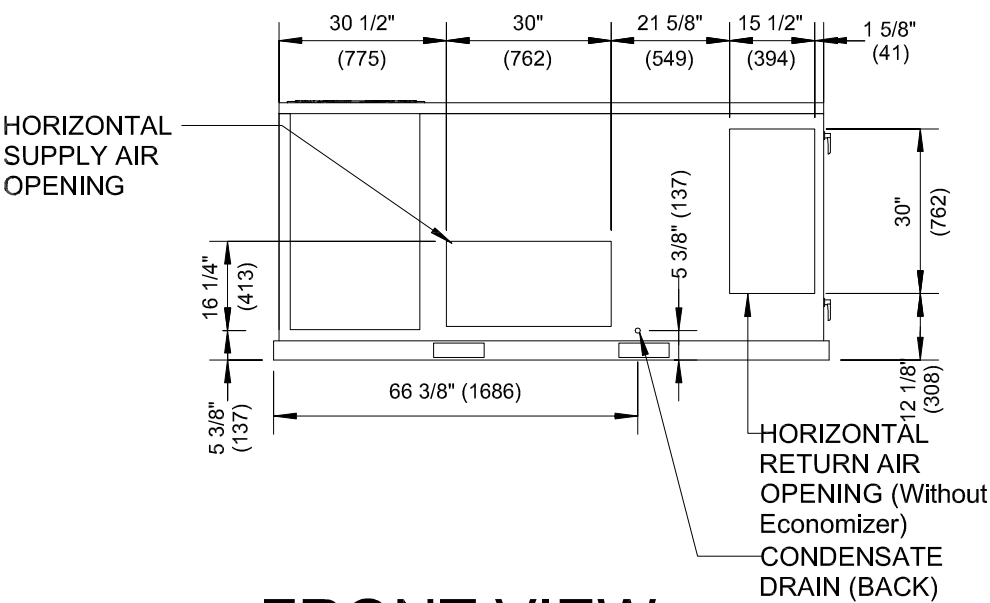


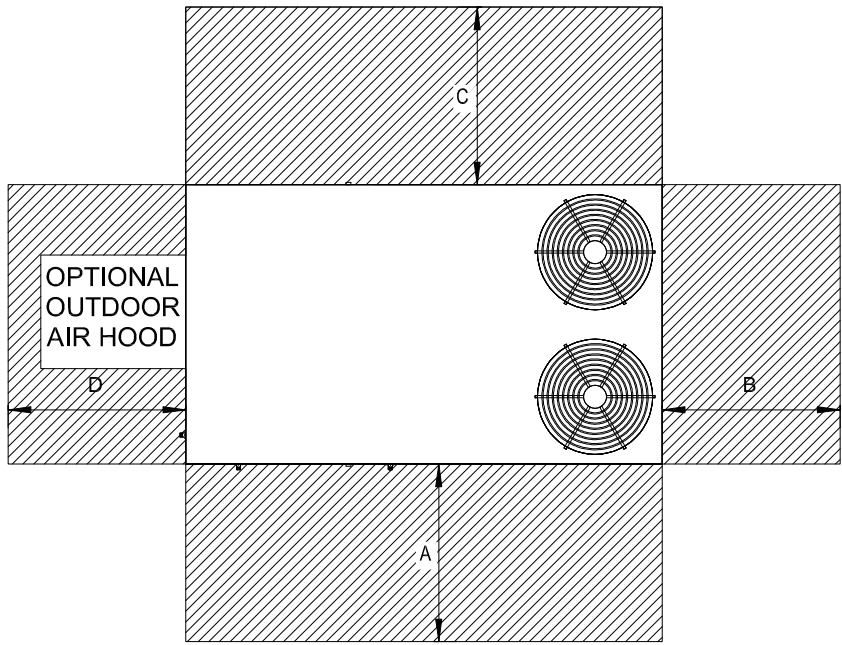


FRONT VIEW
HORIZONTAL OPENING

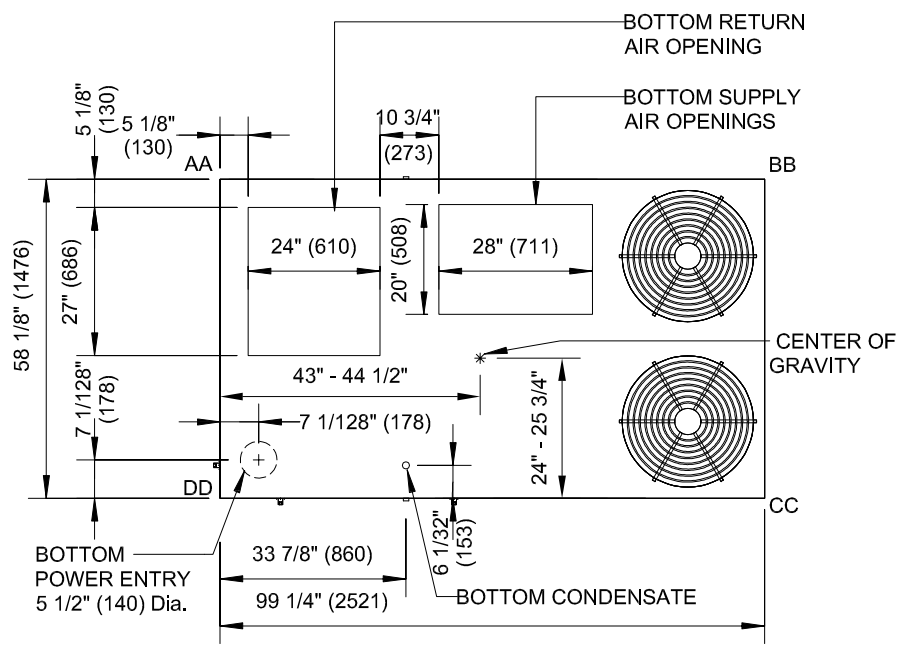


TOP VIEW (Base)

1 Unit Clearance	A		B		C		D		Top Clearance
	in.	mm	in.	mm	in.	mm	in.	mm	Unobstructed
Service Clearance	60	1524	36	914	36	914	36	1524	
Minimum Operation Clearance	36	914	36	914	36	914	36	914	


NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.
1 Service Clearance - Required for removal of serviceable parts.
Minimum Operation Clearance - Required clearance for proper unit operation.

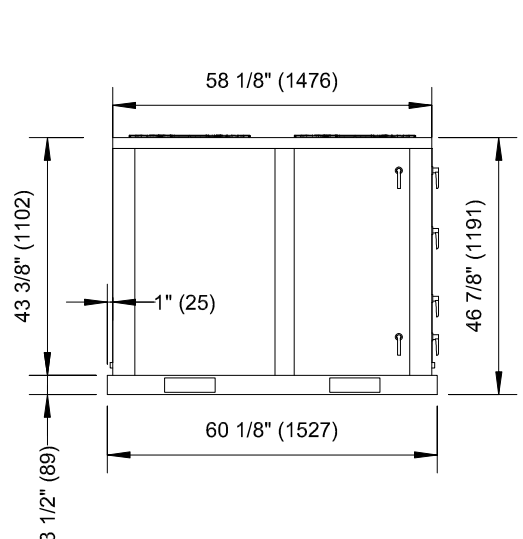

END VIEW

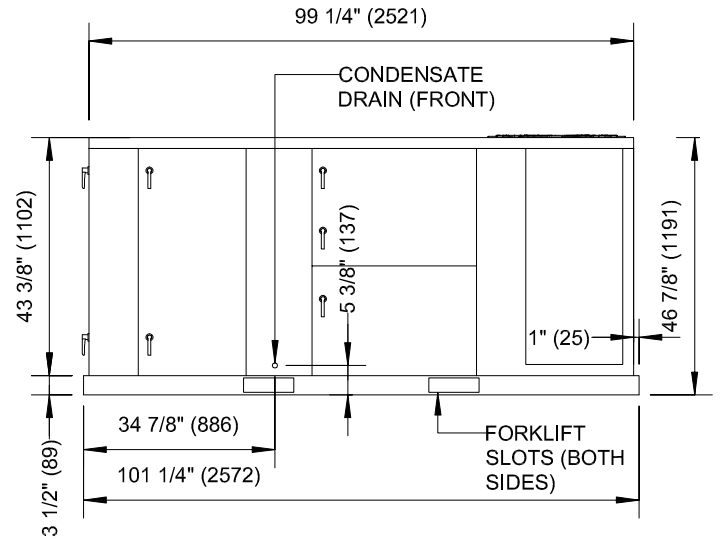

SIDE VIEW

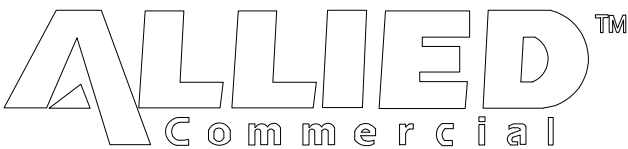

K-Series Packaged Electric/Electric Rooftop Units

Series: K-Series	Nominal Cooling Capacity (Tons): 7.5-12.5 Ton
Model: LCX	

LCX

Scale: N.T.S.