

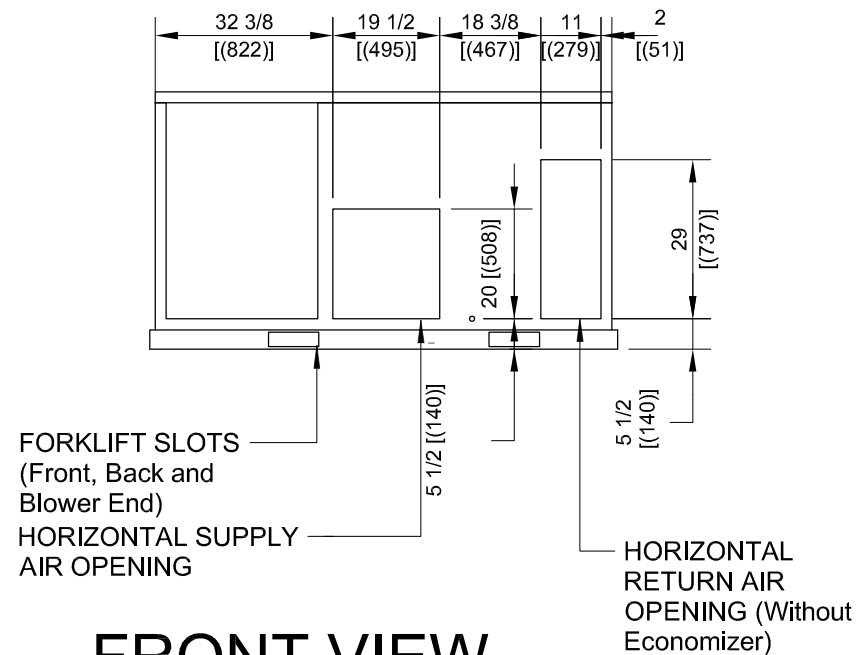


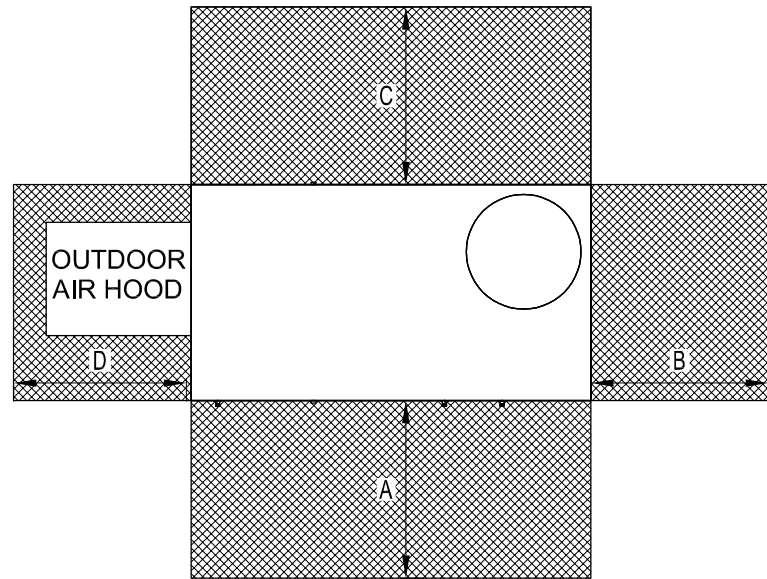

FRONT VIEW
HORIZONTAL OPENING

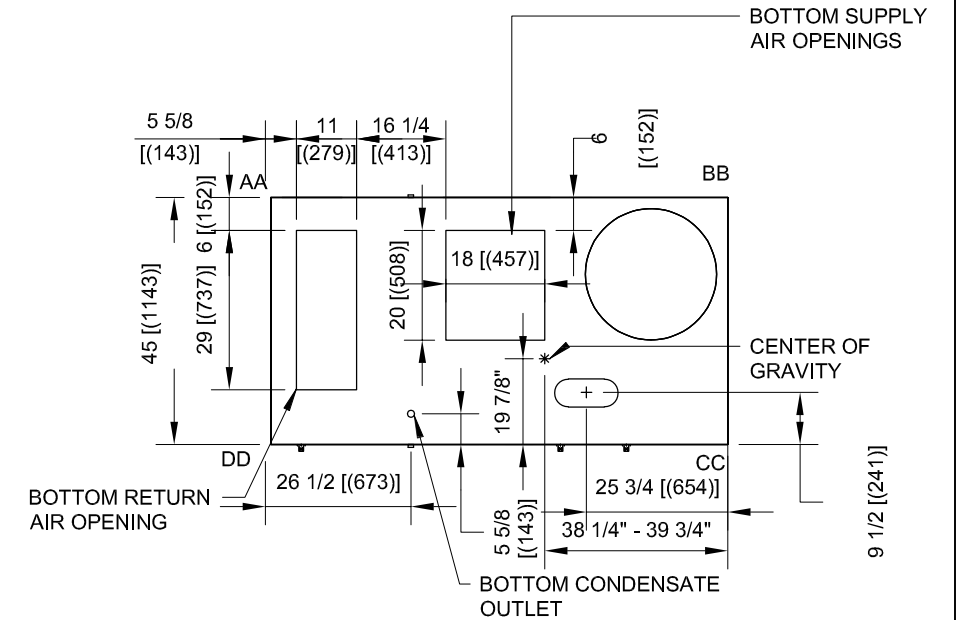

TOP VIEW (Base)


¹ Unit Clearance	A		B		C		D		Top Clearance
	in.	mm	in.	mm	in.	mm	in.	mm	
Service Clearance	48	1219	36	914	36	934	36	914	Unobstructed
Clearance to Combustibles	36	914	1	25	1	25	1	25	
Minimum Operation Clearance	36	914	36	914	36	914	36	914	

NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.


¹ Service Clearance - Required for removal of serviceable parts.

Clearance to Combustibles - Required clearance to combustible material.


Minimum Operation Clearance - Required clearance for proper unit operation.

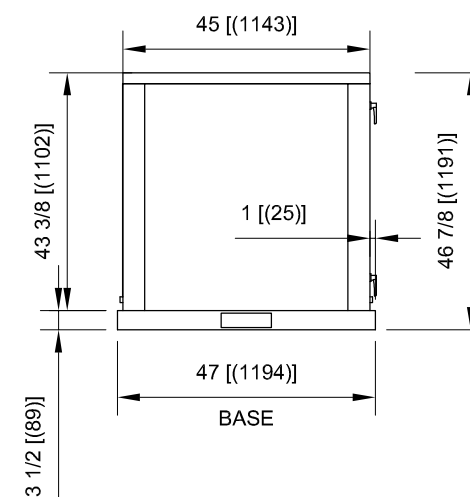

END VIEW

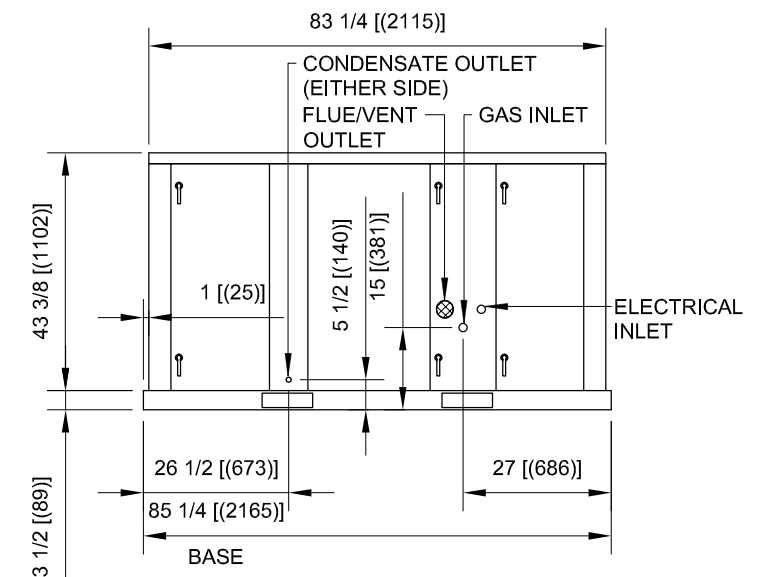

SIDE VIEW

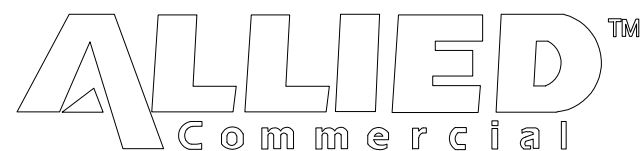

E-Series Packaged Gas / Electric Rooftop Units - High Efficiency

Series: E-Series

Nominal Cooling Capacity (Tons): 3-6 Ton

Model: LGT

LGT

Scale: N.T.S.