

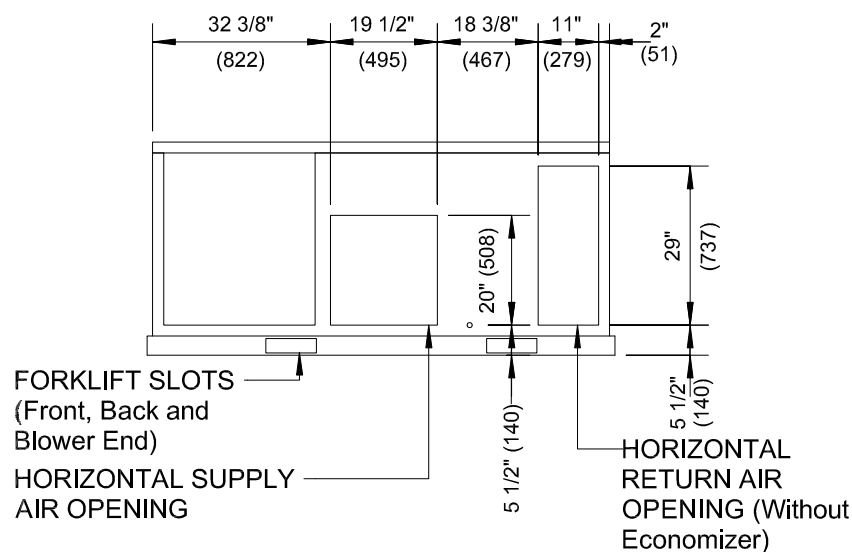


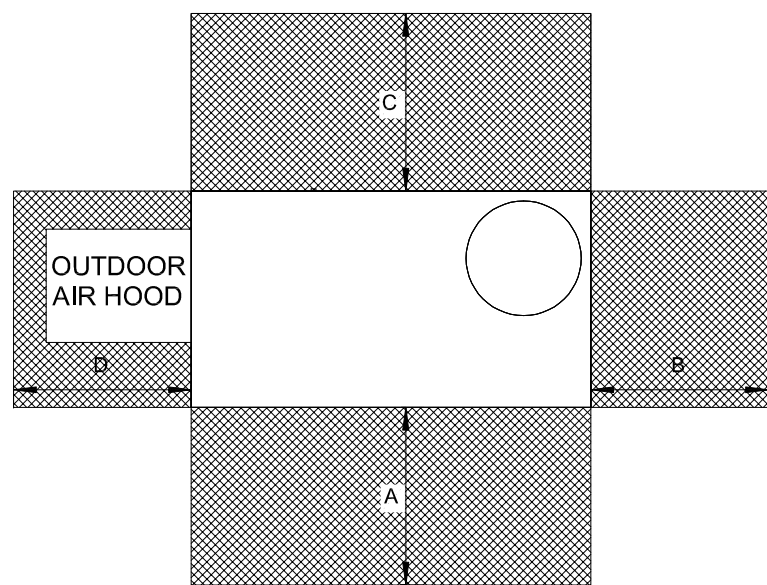

FRONT VIEW
HORIZONTAL OPENING

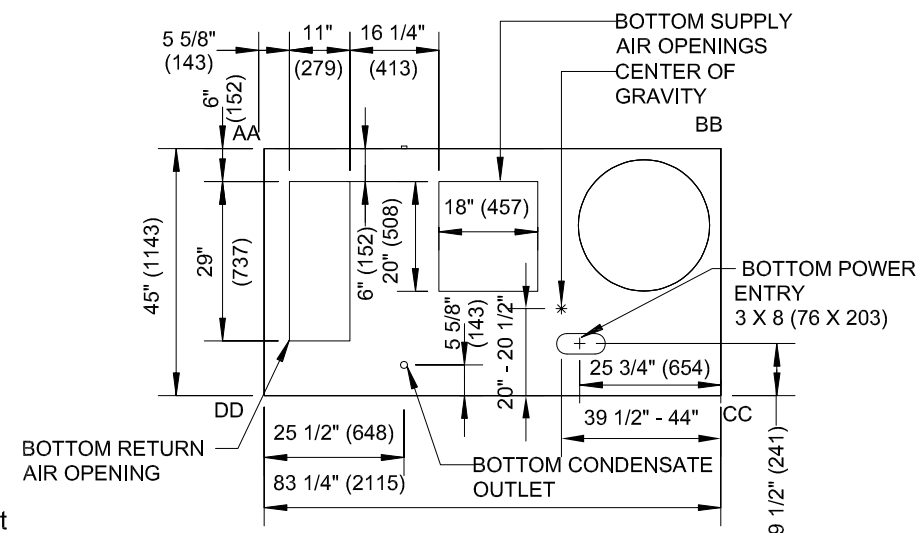

TOP VIEW (Base)


1 Unit Clearance	A		B		C		D		Top Clearance
	in.	mm	in.	mm	in.	mm	in.	mm	
Service Clearance	48	1219	36	914	36	914	36	914	Unobstructed
Clearance to Combustibles	36	914	1	25	1	25	1	25	
Minimum Operation Clearance	36	914	36	914	36	914	36	914	

NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.


1 Service Clearance - Required for removal of serviceable parts.

Clearance to Combustibles - Required clearance to combustible material.


Minimum Operation Clearance - Required clearance for proper unit operation.

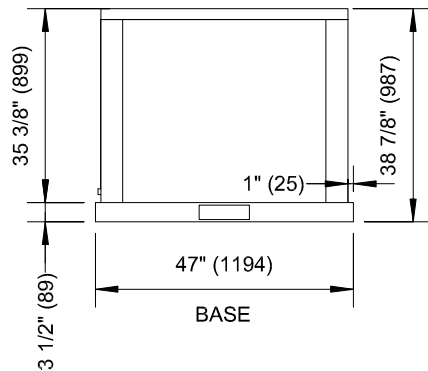

END VIEW

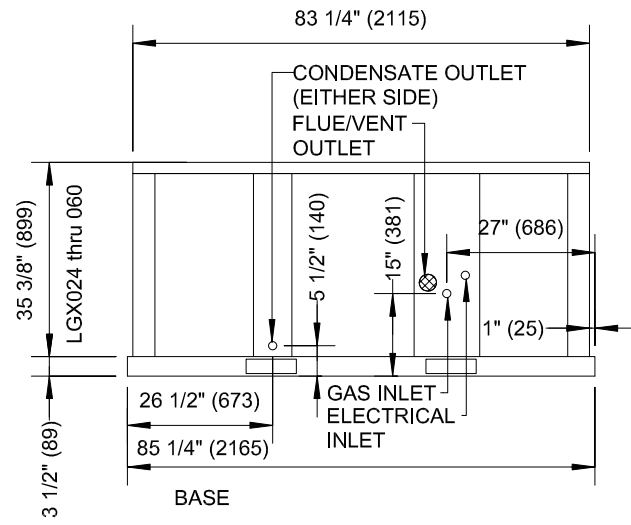

FRONT VIEW

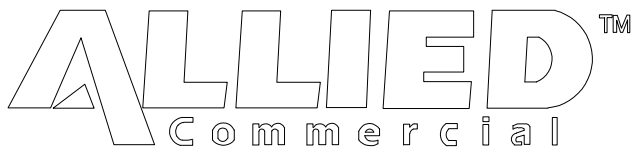

K-Series Packaged Gas Heat w/ Electric Cooling Rooftop Units

Series: K-Series

Nominal Cooling Capacity (Tons): 2-6 Ton

Model: LGX

LGX

Scale: N.T.S.