




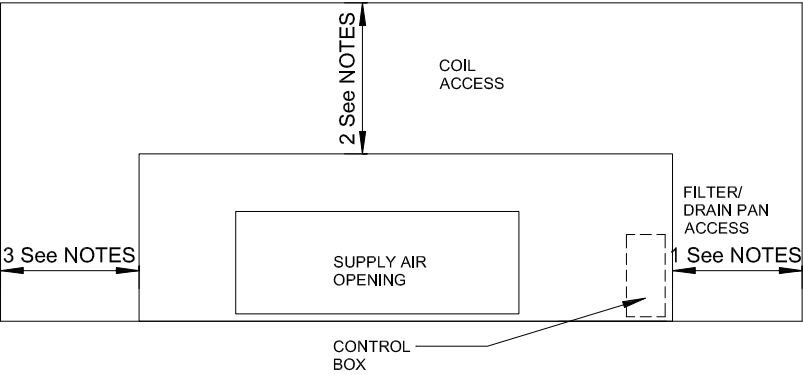


TOP OR END VIEW
(Depending on Application)

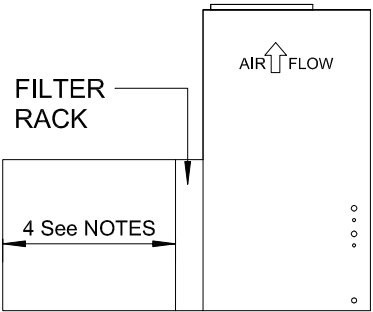

SIDE VIEW (Upflow)

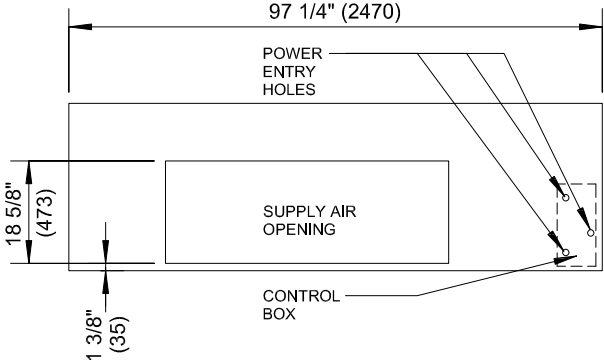

SUPPLY END VIEW

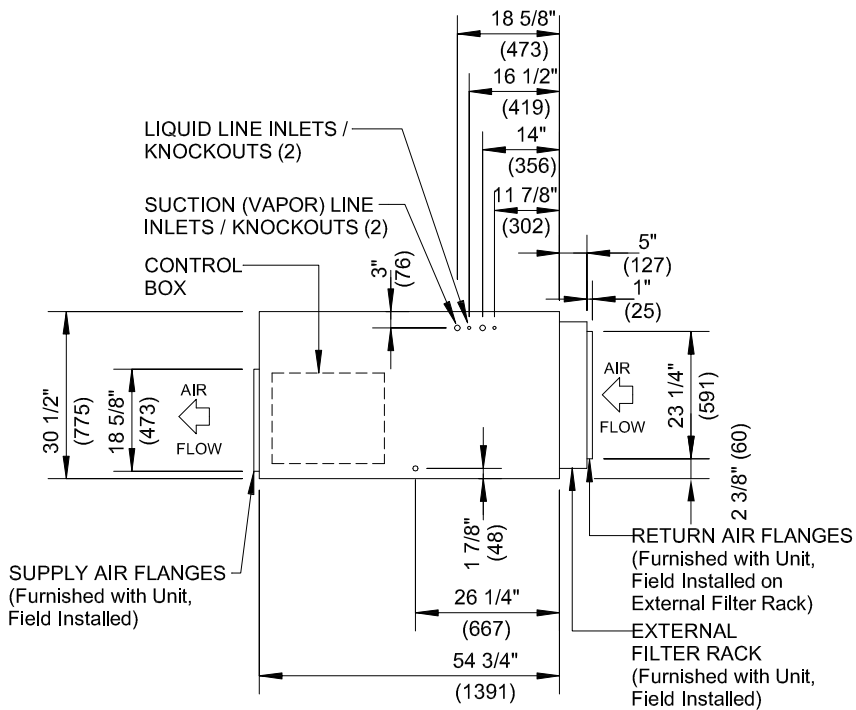

SIDE VIEW
(Horizontal Applications)

INSTALLATION CLEARANCES (WITH ELECTRIC HEAT)

- Cabinet** – 0 in. (0 mm)
- To Plenum** – 0 in. (0 mm)
- To Outlet Duct within 3 feet (914 mm)** – 0 in. (0 mm)

RECOMMENDED SERVICE CLEARANCES

1 Filter Removal and Routine Maintenance:

(Upflow/Horizontal)

36 in. (914 mm)

1 Service Clearance for Drain Pan Removal:

(Upflow/Horizontal)

EL072KA, EL090KA – 57 in. (1448 mm)

EL120KA, EL150KA – 73 in. (1854 mm)

EL180KA, EL240KA – 102 in. (2590 mm)

2 Coil Cleaning and LDS Service (Upflow):

All models – 36 in. (914 mm)

3 Alternate Coil Cleaning:


Provide 36 in. (914 mm) on this side if top/rear access is obstructed

3 Alternate Drain/Refrigerant Line Location:


Allow additional clearance if refrigerant or drain lines are routed from this side of cabinet

4 Freestanding Operation With Filter Rack But Without Return Air Duct


All models - 24 in. (610 mm)

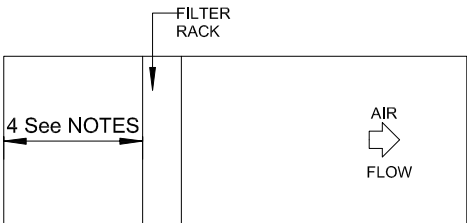


SIDE VIEW (Horizontal)

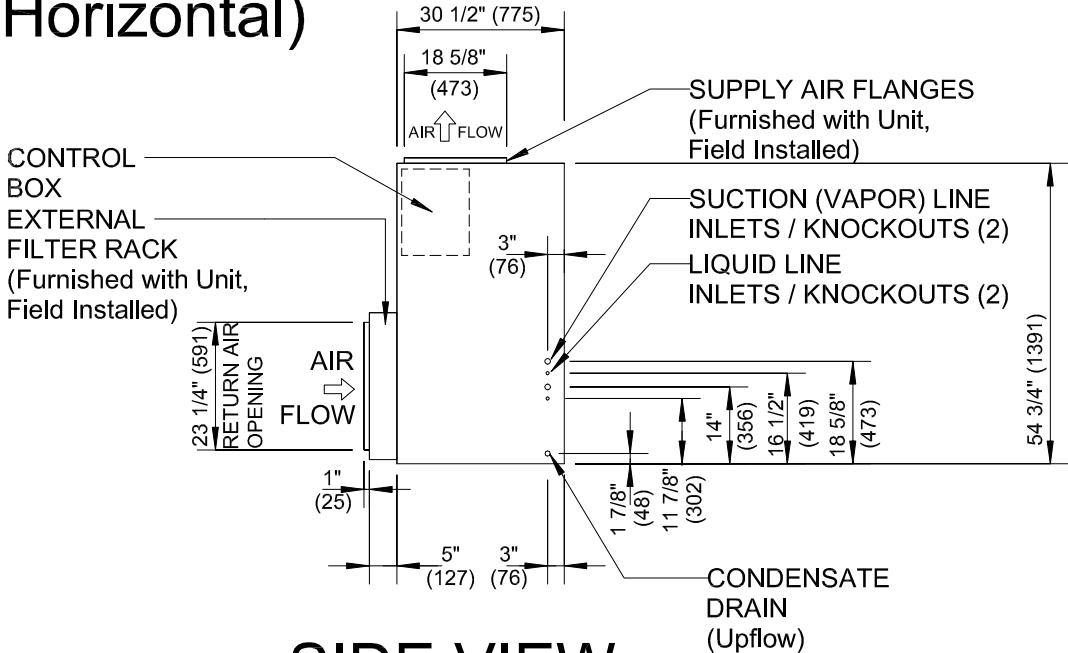

SIDE VIEW
(Upflow Applications)

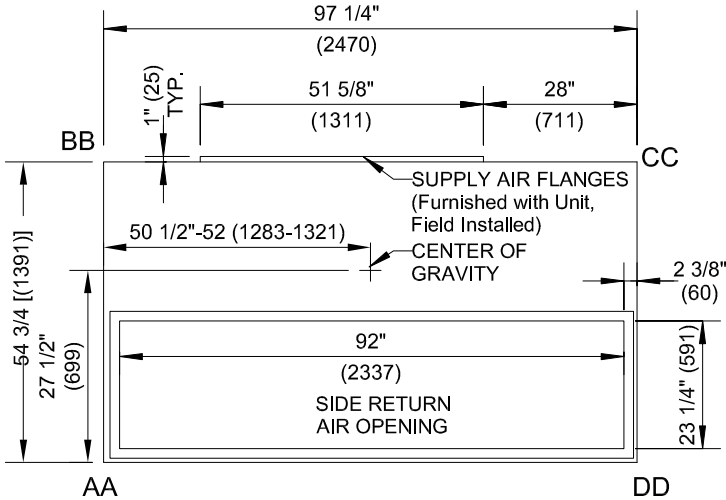

INLET VIEW
(Upflow Applications)

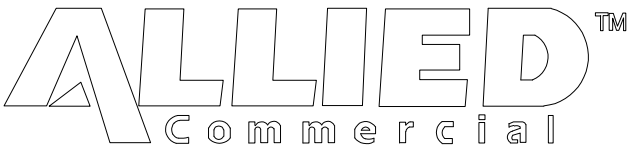

T-Series Split System Air Handler

Series: T-Series

Nominal Cooling Capacity (Tons): 15-20_Tons

Model: ELKA

ELKA

Scale: N.T.S.