

V-Series™ Architectural Louvers



V-SERIES™

Customizable appearance complements the exterior of any building.

MagicPak All-In-One® HVAC System Louvers

All-in-One HVAC Systems

MagicPak® louvers adapt to your requirements.

MagicPak is designed to make life easier during every step of a building's construction. This includes preserving the final appearance of the building by utilizing an architectural louver that adds functionality, flexibility and customization.

Louvers preserve appearances and protect components.

As the most visible and external component of a MagicPak unit, external louvers serve multiple purposes:

- Protect internal components from weather and debris
- Preserve the building's appearance by blending in with the color scheme

MagicPak gives the flexibility to specify colors and finishes.

V-Series™ units are shipped with standard metal louvers. Depending on your design needs, you can choose secondary architectural louvers that attach to the wall sleeve on the face of the building for a seamless appearance. These extruded-aluminum louvers are as varied in their colors as they are durable. Choose from a selection of 15 high-performance finishes formulated to resist fading and weathering. Or, for maximum flexibility, order MagicPak louvers to your exact specifications with custom paint and color matching.



HWC8



HWC9

Aluminum 2 Coat 70% PVDF Colors

Bone White (24)	Dark Bronze (75)	Portland Stone (49)	Light Stone (43)	Shelburne (69)	Forest Green (36)
Sandstone (67)	Herringbone (37)	Coronado Red (34)	Sahara Tan (65)	Stone Gray (78)	Ascot White (19)
Black (89)	Medium Bronze (72)	Taupe (52)			

Aluminum Pearledize 70 Standard Colors

Dark Bronze (75)	Medium Bronze (72)	Champagne (71)	Bright Silver (88)	Warm Silver (96)	Asti (86)
Copper (92)	Coral Reef (93)	Blue (05)			

Colors may vary based on screen and print resolution, request a color sample from MagicPak today. Just call 1.800.448.5872.



Built to stay beautiful. Built to work.

MagicPak® louvers aren't just durable and attractive, they're also functional. In fact, two angles of louvers are used in each external grille section, each with a different purpose.

Louvers in the upper section are angled upwards.


- Discharge air away from the condenser coil intake to prevent air recirculation
- Prevent line-of-sight to internal components to preserve appearance

Louvers in the lower section are angled downward.

- Help preserve clear air intake to condenser coil
- Direct water, dirt, and debris away from the unit

Water dispersion, built right in.

MagicPak V-Series™ units are designed to help prevent water damage to internal components and dwellings. Rather than rely solely on gaskets and seals, the units are equipped with wall sleeves that have sloped base pans allowing water to exit to the building exterior. The base pans are made of polypropylene and infused with antimicrobial protection so corrosion that leads to discoloration on a building's facade is less of a concern.

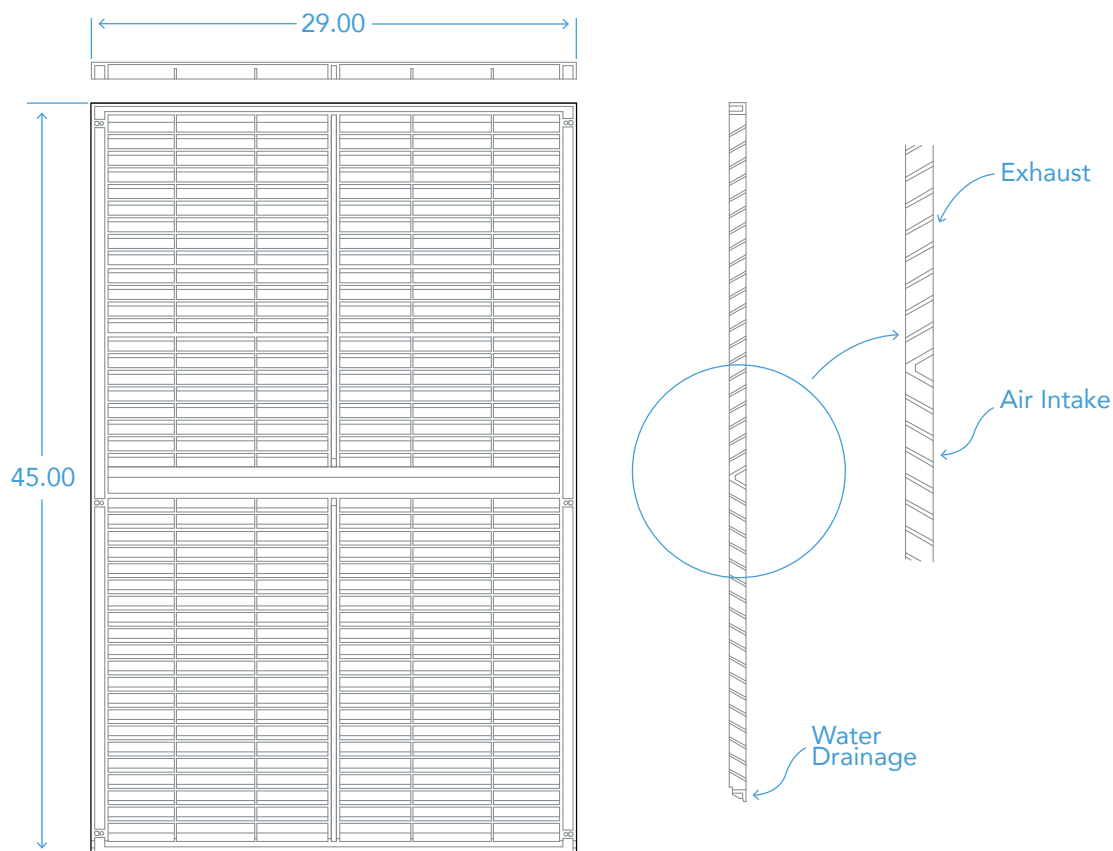

Inside MagicPak®

V-Series™

Specifications

- EWC and HWC are available in 1-, 1.5-, 2- and 2.5- ton capacities
- Cooling efficiencies up to 12.5 SEER2 and 10.5 EER2
- Self-contained package simplifies installation and service
 - No external refrigerant lines
 - No separate cooling coil
 - Internal direct venting with no separate vent
 - Self-contained, replaceable, slide-out cooling chassis
- Pre-wired and pre-charged
- Individually metered and controlled
- Antimicrobial evaporator drain pan
- Evaporator drain float switch
- Freeze Shield™ condensate trap* with side or front connection on HWC9 models
- Standard stainless steel heat exchanger
- 5-year limited warranty on parts
- 20-year limited warranty on stainless steel heat exchanger

* HWC9 model only

ELECTRIC HEATING / ELECTRIC COOLING | EWC MODEL

- Electric heating range of 5 - 15 kW
- Cooling capacity of 12,000 - 30,000 BTU/HR

GAS HEATING / ELECTRIC COOLING | HWC MODELS

HWC8

- Standard efficiency 80% AFUE
- Gas heat input of 24,000 - 60,000 BTU/HR
- Cooling capacity of 12,000 - 30,000 BTU/HR

HWC9

- High efficiency up to 95% AFUE
- Gas heat input of 22,000 - 55,000 BTU/HR
- Cooling capacity of 12,000 - 30,000 BTU/HR



To learn more, visit MagicPak.com.
One Choice. Greater Impact.