



INSTALLATION INSTRUCTIONS


SINGLE ROD PARTS LIST:

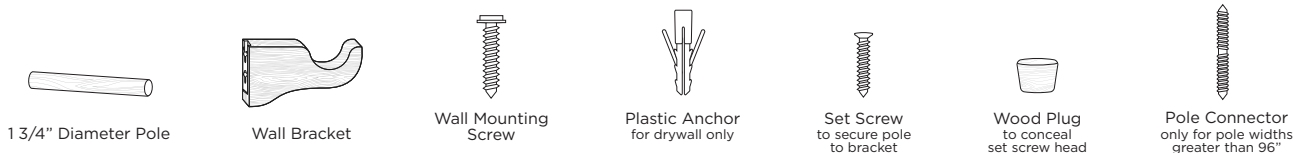

DOUBLE ROD PARTS LIST:

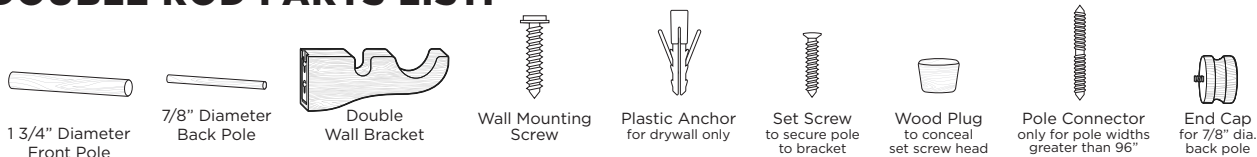


TOOLS NEEDED: NOT INCLUDED



Tape Measure



Pencil



Drill



1/16" Drill Bit for wall stud
5/16" Drill Bit for drywall



Slotted and Phillips-head screwdrivers



Hammer



Level

INSTALLATION:


- 1 Determine the placement of pole(s) using the Measuring Guide on reverse side.
- 2 Measure and mark bracket locations above window. Utilize a level to ensure the pole will be level on the wall.
- 3 Drill 5/16" diameter pilot hole in drywall (or 1/16" in stud) for all marked bracket locations.
For drywall only: Hammer plastic anchor into pilot hole until flush.
- 4 Attach all wall brackets to wall as follows:
 - a. Loosen screw 1/4 turn and remove the metal bracket.
 - b. Secure metal bracket to wall using wall mounting screws.

Hand tighten with screwdriver only, to prevent screw head damage. (Fig. 1)

 - c. Align screws on the wall bracket to the top of the key holes on the metal bracket.
 - d. Insert wall bracket screws into the metal bracket and secure by pushing the wall bracket down. (Fig. 2)
- 5 Slide drapery panels or rings onto the pole(s) and place pole(s) onto the installed brackets. Tighten set screws to secure the pole(s). Conceal set screws using wood plugs. (Fig. 3)


For pole widths greater than 96" only: screw pole sections together using pole connector(s) provided and center the pole seams in brackets. (Fig. 4)

- 6 Attach decorative finials onto each end of the single or front pole. (Decorative finials sold separately.)
For Double Poles only, attach end caps onto each end of the back pole. (Fig. 5)

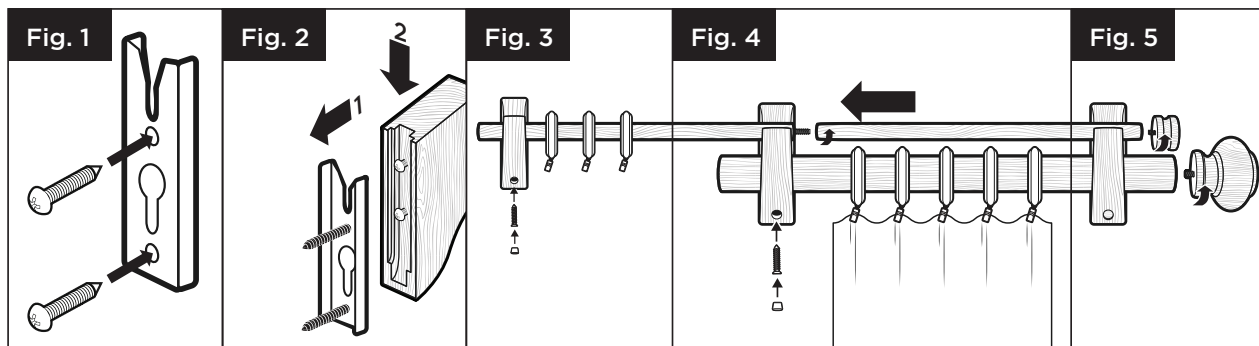

NOTE: Double rod installation shown but the same applies to Single Rod

MEASURING GUIDE DIAGRAM

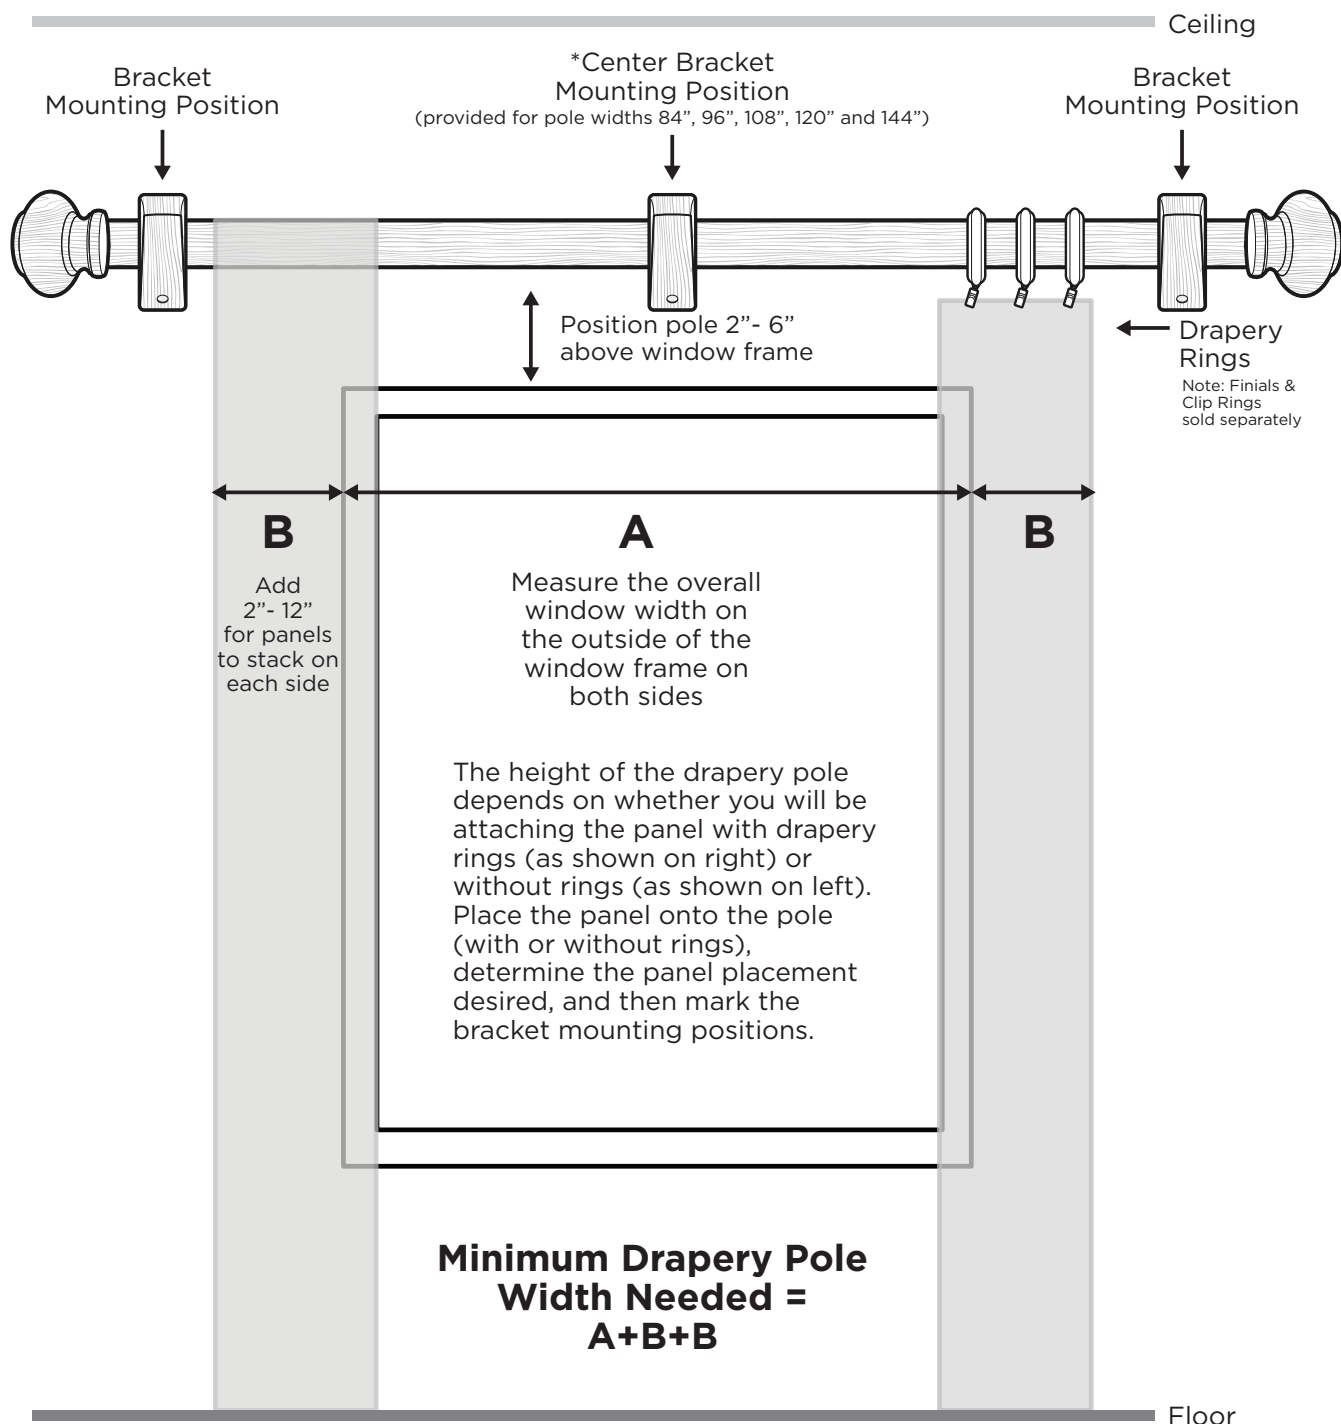

* For pole widths 126", 162" and 180", four brackets are provided and should be mounted evenly spaced apart in order to hide pole seams behind the brackets.

