







30" Long Handle Ideal for use with light and heavy truck chains

Dual Purpose Jaws One side closes cross chain hooks and the other side spreads tire chains hooks



Quick & Easy
Adjusters make fitting and tensioning tire chains quick and easy

Adjustable

Works with rims from 19.5" to 24.5"

Replacement Cross Chains with Hooks



Stock No.	Trade Size	Diameter
USA6253 7ST	7MM Studded	7MM
USA6253 8ST	8MM Studded	8MM
USA7213 8ST	8MM Studded	8MM
USA7215 8ST	8MM Studded	8MM
USA7214 8ST	8MM Studded	8MM



Stock No.	Trade Size	Diameter
USA6253	7MM Square Link	7MM
USA6434 8.2MM	8.2MM Square Link	8.2MM
USA7420 8.2MM	8.2MM Square Link	8.2MM
USA6630 8.2MM	8,2MM Square Link	8.2MM



Notes: Refer to pewag Traction Catalog for a complete listing of all parts and accessories available.






Traction Headquarters

190 Greenhorn Drive Pueblo, CO 81004 800.445.2895 Fax: 916.408.0575

Canadian Headquarters

3600B Laird Road Mississauga, ON L5L 6A7 888.598.0626 Fax: 289.201.0075



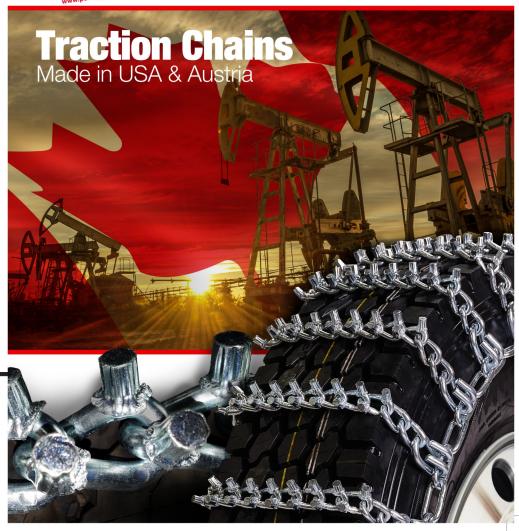



pewag Studded Chains Designed for Aggressive Off-Road Terrain











Premium Materials

Made of premium high-grade alloy steel
Unique 8 Sided Design
Increases stud surface area by 23%

Superior Penetrating TractionGets through the most extreme conditions

Advanced Engineering

For the most aggressive off-road applications

Superior Penetrating TractionGets through the most extreme conditions

Longer Lasting!

Improved up time, cost less per kilometer, lower operating costs

7 mm St TIRE	tudded RIM	SINGLES w/ Cam	SINGLES w/o Cam	TRIPLES w/ Cam	TRIPLES w/o Cam
11-	22.5	USA2247SC 7ST	USA2247S 7ST	USA4247SC 7ST	USA4247S 7ST
11-	24.5	USA2249SC 7ST	USA2249S 7ST	USA4249SC 7ST	USA4249S 7ST
8 mm St	udded				
11-	22.5	USA2247SC 8ST	USA2247S 8ST	USA4247SC 8ST	USA4247S 8ST
11-	24.5	USA2249SC 8ST	USA2249S 8ST	USA4249SC 8ST	USA4249S 8ST
8 mm St		STEER CHAIN	STEER CHAIN		
TIRE	RIM	4 Link Spacing	2 Link Spacing		
385/65	22.5	USA3255SC 8ST	USA3255S 8ST DS		
425/65	22.5	USA3271SC 8ST	USA3271S 8ST DS		
445/65	22.5	USA3261SC 8ST	USA3261S 8ST DS		
Zig Zag Studded			7 mm	8 mm	8 mm
TIRE	RIM	w/ Cam	w/o Cam	w/ Cam	w/o Cam
11-	22.5	USAZZ2247SC 7ST	USAZZ2247S 7ST	USAZZ2247SC 8ST	USAZZ2247S 8ST
11-	24.5	USAZZ2249SC 7ST	USAZZ2249S 7ST	USAZZ2249SC 8ST	USAZZ2249S 8ST
315/80	22.5	USAZZ2255SC 7ST	USAZZ2255S 7ST	USAZZ2255SC 8ST	USAZZ2255S 8ST
445/50	22.5	USAZZ3269SC 7ST	USAZZ3269S 7ST		



pewag Square Link Chains Designed for Over the Road Use











Reduce & Increase

Starwave® profile reduces weight and increases the hardened surface by 7%

Better Wear & Longer Life Reversable design increases lifespan to

Reversable design increases lifespan to reduce downtime and cost per kilometer

More Grip!

Improves traction with additional edges providing more grip to dig into the ground

Better Traction

Works like paddles in mud conditions

Premium Steel

Premium alloy **TITANGrip**® steel for extended wear and strength

Lasts Up to 8X Longer! Compared to commodity v-bar

Oversized Components
Stands up to off-road conditions

7 mm Square TIRE RIM		SINGLES w/ Cam	SINGLES w/o Cam	TRIPLES w/ Cam	TRIPLES w/o Cam	
11-	22.5	USA2247SC	USA2247S	USA4247SC	USA4247S	
11-	24.5	USA2249SC	USA2249S	USA4249SC	USA4249S	
8.2 mm	Square					
11-	22.5	USA2448SC 8.2MM	USA2448S 8.2MM	USA4448SC 8.2MM	USA4448S 8.2MM	
11-	24.5	USA2452SC 8.2MM	USA2452S 8.2MM	USA4461SC 8.2MM	USA4461S 8.2MM	
8.2 mm Square			STEER CHAIN			
TIRE	RIM	4 Link Spacing	2 Link Spacing			
385/65	22.5	USA3255SC 8.2MM	USA3255S 8.2MM DS			
425/65	22.5	USA3271SC 8.2MM	USA3271S 8.2MM DS			
445/65	22.5	USA3261SC 8.2MM	USA3261S 8.2MM DS			
Zig Zag: TIRE	Square RIM	7 mm w/ Cam	7 mm w/o Cam			
11-	22.5	USAZZ2247SC	USAZZ2247S			
11-	24.5	USAZZ2249SC	USAZZ2249S			
315/80	22.5	USAZZ2255SC	USAZZ2255S			
445/50	22.5	USAZZ3269SC	USAZZ3269S			

pewag Universal Chain for Heavy Equipment with High Traction Demands



Durability
Exclusive welded wear bars are added to a 3-link design, providing unmatched wear resistance and durability

Better Wear

Reversable design increases lifespan to reduce downtime and cost per kilometer

Smooth Ride Mesh design provides a smoother ride

Premium Steel
Premium alloy TITANGrip*
steel for extended wear
and strength

TIRE	RIM	8.2 mm	10 mm	12 mm	TIRE	RIM	8.2 mm	10 mm	12 mm	TIRE	RIM	8.2 mm	10 mm	12 mm
12-	20	69162			17.5-	25	69122	69158	69160	445/65	22.5	60197		
12.5-	20	4143			18-					385/95		69121		
13-	20	3999			18-	25				400/80	24	69164		
13-	24	69120			19.5L-	24			03481	385/95		69121		
13-	25	69120			20.5-	25			69112	445/80	25	69122		69160
14-	20	69163			23.1-				69149	445/95				03481
14-	24	69121	69156		23.5-	25			69149	505/95	25			
14.5-	20	69164			26.5-				69150	525/80				69112
15.5-	25				29.5-	25			69161	600/70	30		69125	69149
	20	73370			365/80		45657			605/80				69149
16-	20	69122		69160	395/85	20				625/70	25			84849
	24			03481	400/70		73370			650/65				84849
16-	25		69119	03481	405/70	20	73370			685/80	25			69150

Notes: This is a guide only - actual fitment may vary - always pre-fit chains before use. Please refer to our complete chain catalog for additional available tire sizes.