



A. Mesh Back
QTY 1




B. Seat
QTY 1



C. Sled base
QTY 1



D. Chair Arms
QTY 2



E. Screw 5/16**1-3/4"
QTY 4



F. Screw 5/16**1-1/2"
QTY 3



G. Screw 5/16**2-1/4"
QTY 6



H. Washer
QTY 7



I. Washer
QTY 3



J. Allen Wrench
QTY 1




K. Bracket
QTY 1




L. Fixation block
QTY 4


Step 1: Attach the sled base (C) to the mesh back(A) using the bracket(K) and following components:(J), (F), (I), (H), (K).

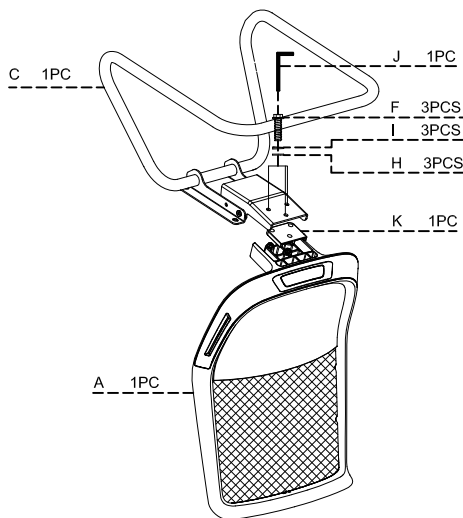

Step 2: Attach seat(B) by using the Allen Wrench(J) to secure screws(E), (H).

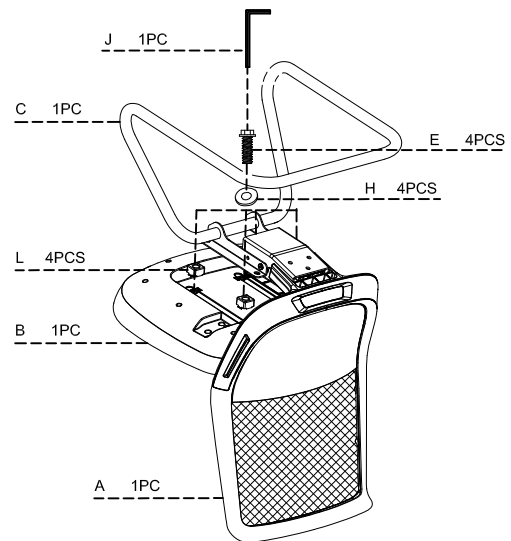

Step 3: To attach the chair arms(D), use the Allen Wrench(J) to secure screws(G) to the seat

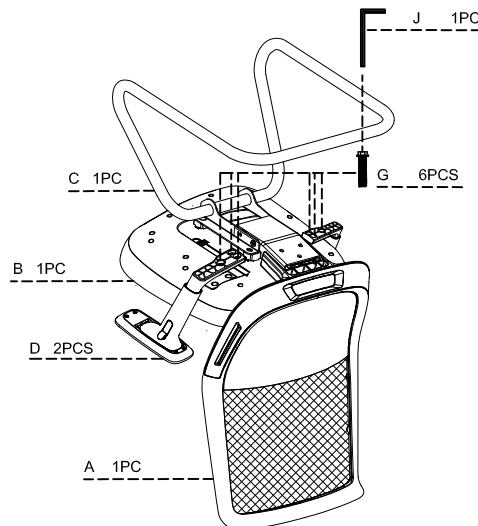

Warnings

1. This product should be used only one person at a time.
2. Do not use this chair unless all bolts, screws and knobs are securely tightened.
3. Save spanner wrench. Check that all bolts, screws and knobs are tight every three months or as needed.
4. Dispose of packing material properly. Do not use the plastic cover as a head covering. It may cause suffocation.
5. Do not use the chair as a stepladder. Use this chair for its intended purpose only.