


REPLACEMENT PARTS

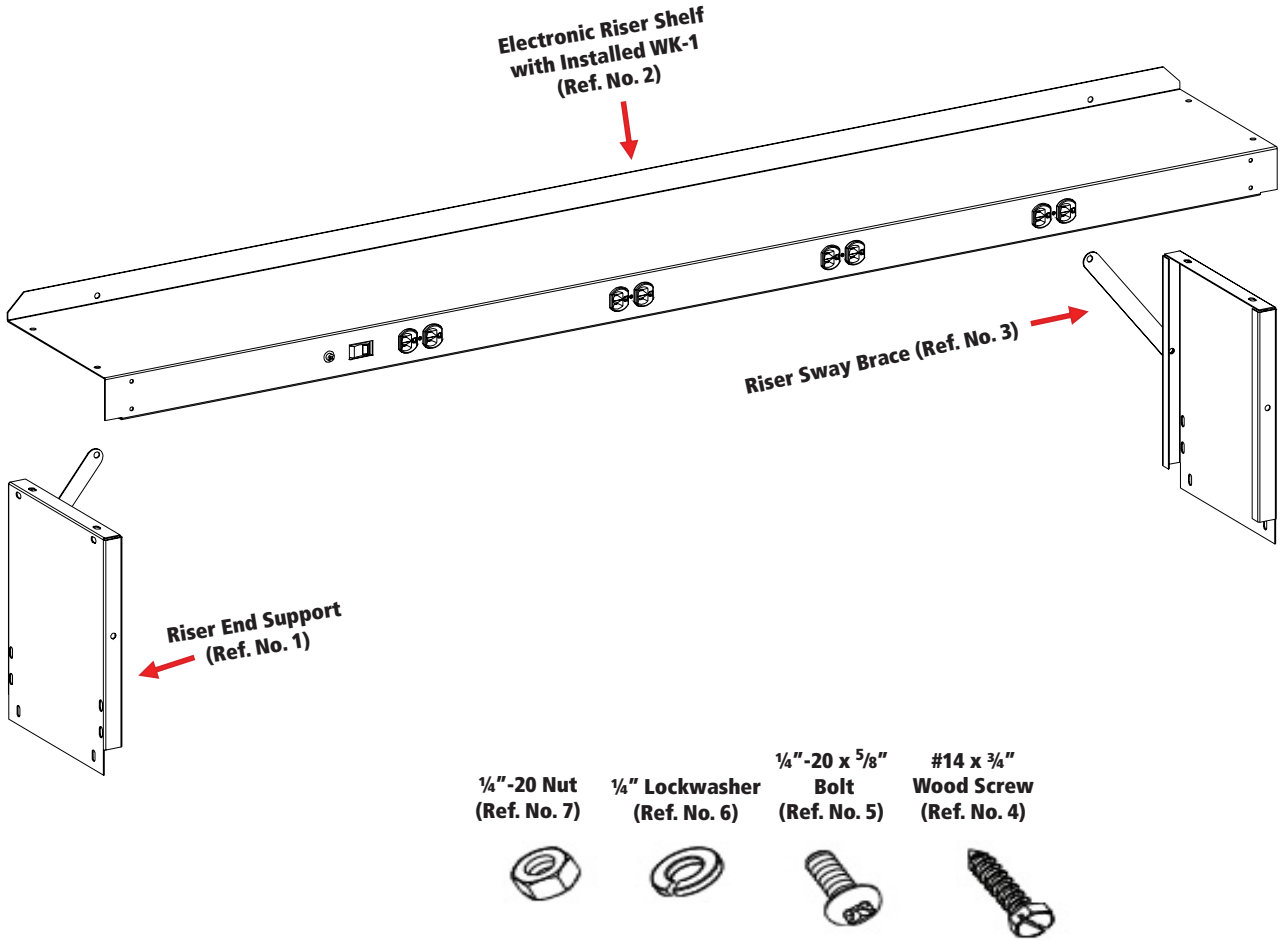

REF. NO.	DESCRIPTION	QTY.	PART NUMBERS	
			NBF-18-1560-WK-1	NBF-18-1572-WK-1
1	Riser End Support	2	WBRS-3	WBRS-3
2	Electronic Riser Shelf with installed WK-1	1	EWRS-60WK	EWRS-72WK
3	Riser Sway Brace	2	RSB-6	RSB-6
4	#14 x 3/4" Hex Head Slotted Wood Screw	4	AVAILABLE LOCALLY	
5	1/4"-20 x 5/8" Bolt	8	AVAILABLE LOCALLY	
6	1/4" Lockwasher	4	AVAILABLE LOCALLY	
7	1/4"-20 Nut	8	AVAILABLE LOCALLY	

TO OBTAIN PROPER REPLACEMENT PARTS, PLEASE PROVIDE THE FOLLOWING INFORMATION:

- Purchase Date
 - Description of part(s) needed and part number(s) as shown in Parts List (above)
 - Color (i.e. Medium Grey, etc.)
- Contact person's name
 - Your company name
 - Who the product was purchased from
 - Was item missing, or was it damaged?

If requesting parts by telephone, please have as much of the above information ready as possible.
National Business Furniture Customer Service: (800) 558-1010 Website: www.NBF.com

ASSEMBLY INSTRUCTIONS & PARTS MANUAL



Electronic Workstation Riser with Installed Wiring Kit
Models: NBF-18-1560-WK-1, NBF-18-1572-WK-1

RETAIN INSTRUCTIONS FOR FUTURE REFERENCE!



Congratulations on your purchase of an NBF Electronic Workstation Riser! Risers provide extra storage space above your working area and contain four pre-wired duplex power outlets ready for immediate use.

Tools required for assembly are a slotted screwdriver or a 3/8" nut driver, a drill with a 3/16" drill bit, a 7/16" wrench or nut driver and a Phillips head screwdriver.

GENERAL SAFETY INFORMATION

Some parts may have sharp edges. CARE must be taken when handling various pieces to avoid injury. For safety, wear a pair of work gloves when assembling or performing any maintenance on shelving.

LIMITED WARRANTY

NBF warrants goods purchased hereunder to be free of defects in materials and workmanship for a period of one (1) year from the date of shipment, hereunder. This warranty shall not apply in the event goods are damaged as a result of misuse, abuse, neglect, accident, improper application, modification or repair by persons not authorized by Seller, where goods are damaged during shipment, or where the date stamps on the goods have been defaced, modified or removed. UNLESS CONSIDERED UNENFORCEABLE OR UNLAWFUL UNDER APPLICABLE LAW:

- a. ALL IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO WARRANTIES OR MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY EXCLUDED:
- b. BUYERS REMEDY, IF ANY, FOR ANY DEFECTIVE GOODS SHALL BE LIMITED TO A REFUND BY SELLER OR REPLACEMENT OF THE GOODS AT SELLER'S OPTION, AND SHALL IN NO EVENT INCLUDE DAMAGES OF ANY KIND, WHETHER INCIDENTAL, CONSEQUENTIAL OR OTHERWISE.

NO GOODS ACCEPTED FOR RETURN WITHOUT PRIOR APPROVAL. Seller shall have the right to inspect any goods claimed to be defective at Buyers place of business or require Buyer to return the goods to Seller for inspection on Seller's premises. Transportation charges covering returned goods will be borne by Seller only if such goods are proven to be defective, are covered by this warranty and are returned within the warranty period stated above.




NBF • (800) 558-1010

ASSEMBLY OF ELECTRONIC WORKSTATION RISER


Two people are recommended for assembly. Approximate assembly time: 10-15 minutes.

The reference numbers used throughout this sheet refer to the illustration on the back cover.
This is to help you to identify the various parts as they are mentioned.


- 1. Place a riser support (Ref. No.1) on the left side of the bench and align it with the rear of the bench. Drill two pilot holes into the bench through the holes at the bottom of the riser support using a 3/16" drill bit. Attach using two #14 x 3/4" wood screws (Ref. No. 4).

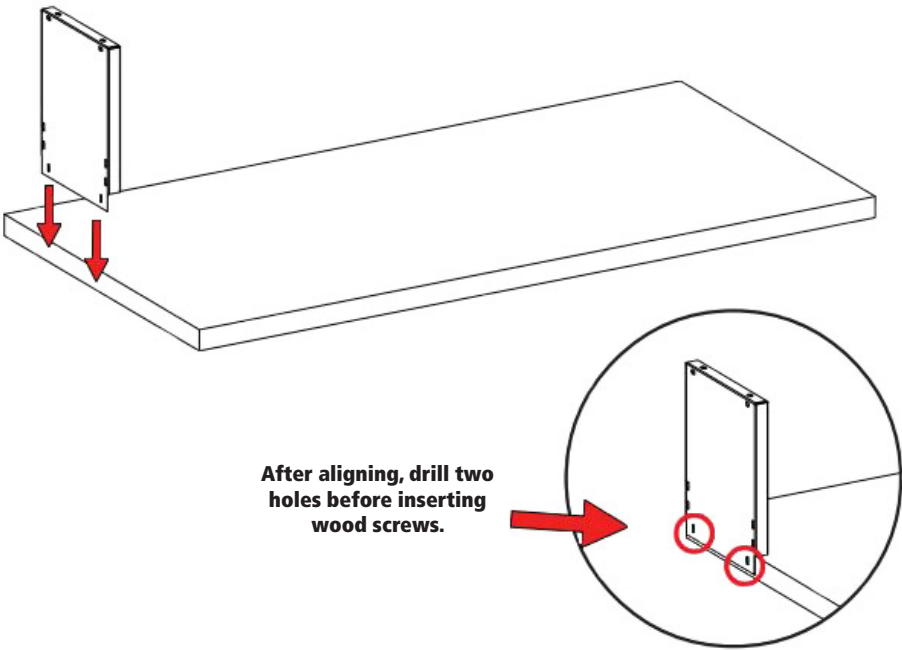


- 2. Place the second riser support on the right side of the bench, again aligning it with the rear of the bench. Attach by repeating the process described in Step 1.

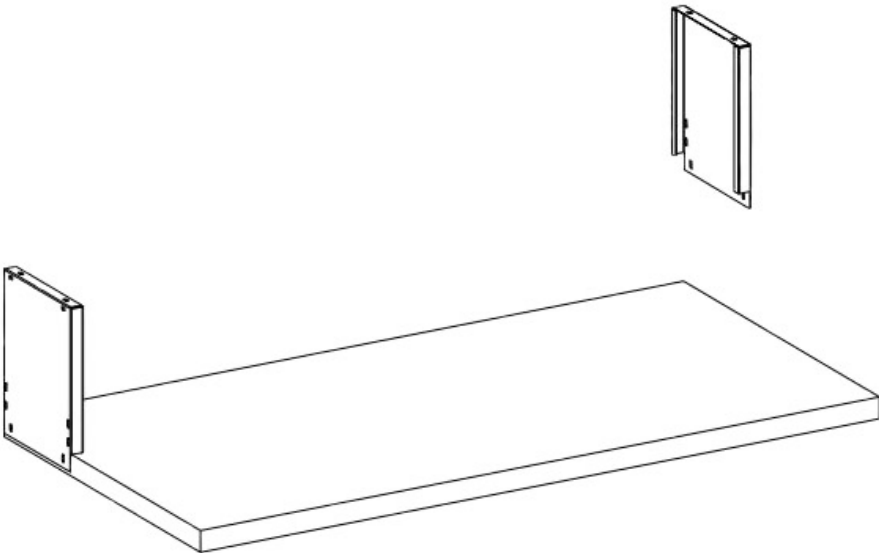

- 3. Secure the riser shelf (Ref. No. 2) to the two riser supports using two 1/4"-20 x 5/8" bolts, two 1/4" lockwashers, and two 1/4"-20 nuts (Ref. No's. 5, 6, and 7) on each side.

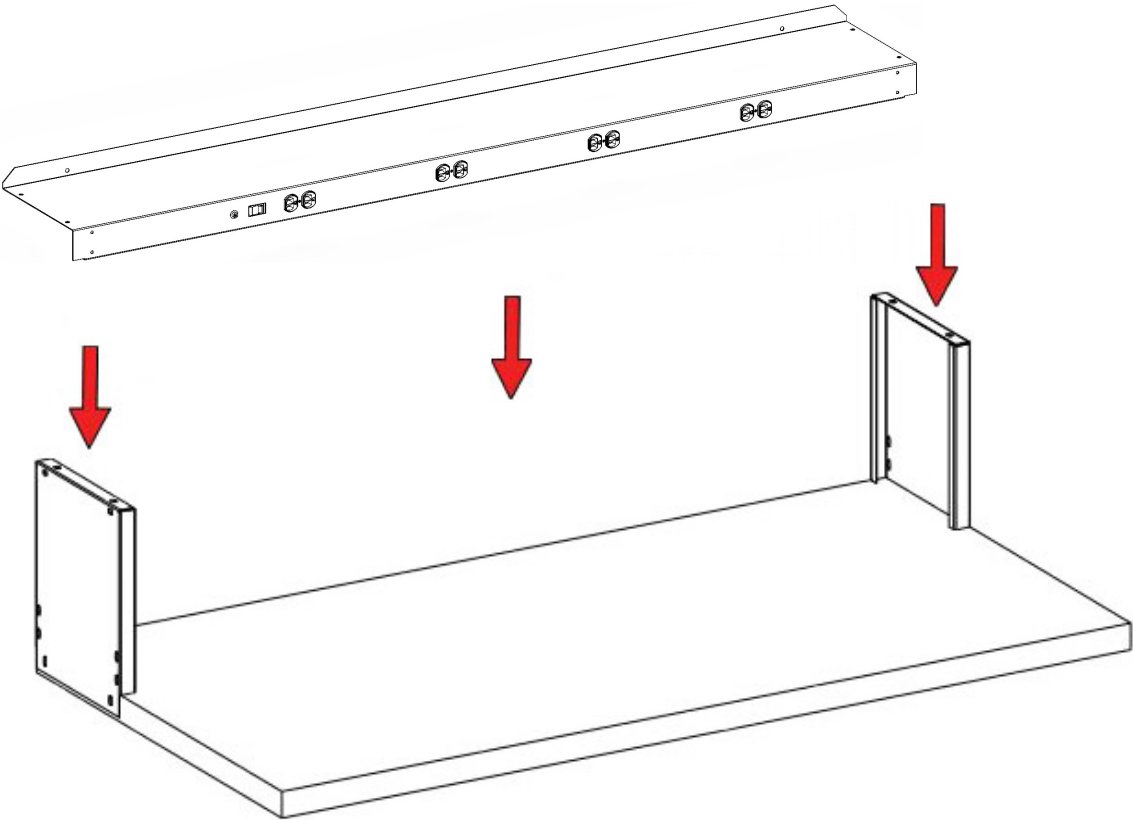

- 4. Secure sway braces (Ref. No. 3) between the riser supports and the riser shelf, using four 1/4"-20 x 5/8" bolts and four 1/4"-20 nuts.

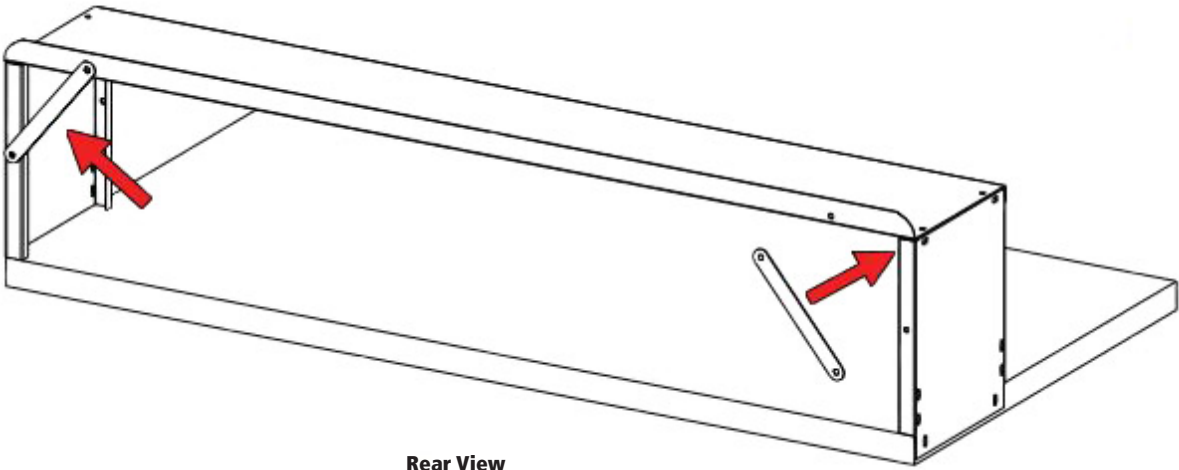

Rear View