

Assembly Instructions For Sumac Benches

Tools required: Allen wrench. (Included in hardware pack)

Note: These instructions are intended for various models and configurations. Your products may not look exactly as those shown in the diagrams.

Important: The assembly process requires that some hardware be kept loose until later in the sequence. Follow these instructions closely to ensure correct assembly.

Recommendation: Retighten all bolts on a seasonal basis to ensure your product remains strong and stable for many years of use.

Parts List

Seat Cushions
Leg Frames, 2 pcs.
H-Frame, 1 pc.

Hardware Pack

1/2" Allen Bolts, 8 pcs.
2" Allen Bolts
8 pcs. for 2-Seat Bench
12 pcs. for 3-Seat Bench
Allen Wrench

1. Unpack and identify all parts. Note: leg frames are interchangeable - no left or right.
2. Connect H-frame to leg frames using 1/2" Allen bolts, as shown in figure 1. Keep bolts slightly loose for now.
3. Attach cushions to frame assembly using 2" Allen bolts, as shown in figure 2. Get all bolts started before tightening securely.
4. Tighten frame bolts from step 2 securely.
5. Your bench is now assembled and ready to use.

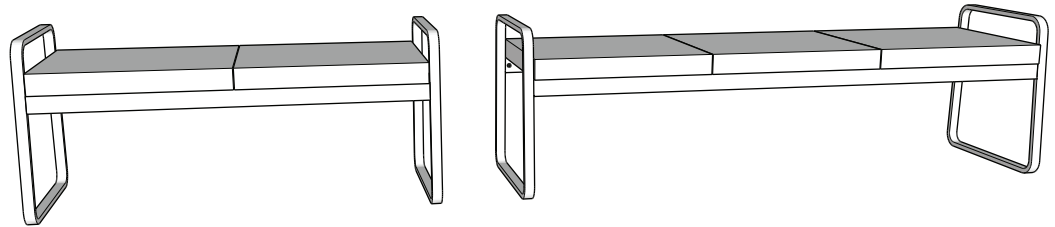


Fig 1

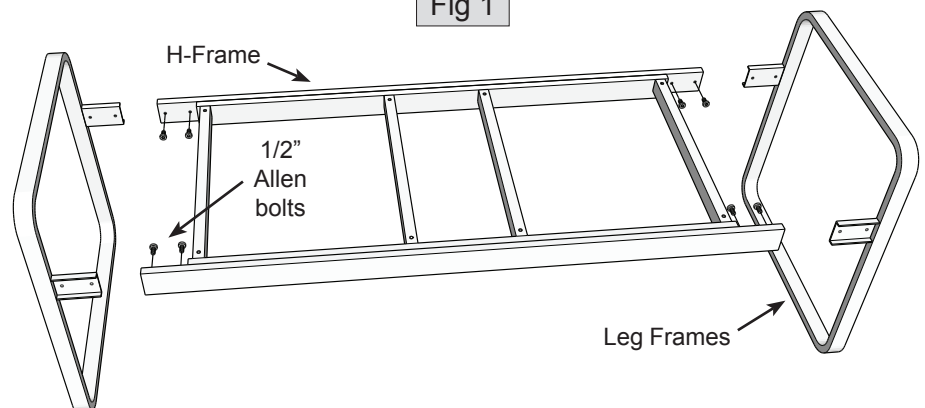


Fig 2

