



A. Mesh Back
QTY 1




B. Seat
QTY 3



C. Mechanism
QTY 1



D. Chair Arms
QTY 2




E. Cylinder
QTY 1



F. Base
QTY 1



G. Casters
QTY 5



H. Screw 3/4"
QTY 4



I. Screw 1 1/4"
QTY 3



J. Screw 2 1/4"
QTY 6




K. Washer
QTY 1



L. Washer
QTY 3



M. Allen Wrench
QTY 1



N. Bracket
QTY 1




O. Headrest
QTY 1

OPTIONAL




P. Screw 3/4"
QTY 2


Step 1: Attach the mechanism (C) to the mesh back (A) using the bracket (N) and the following components: (M), (I), (K), (N).
NOTE: Easiest to assemble upside down. May help to use box for support.

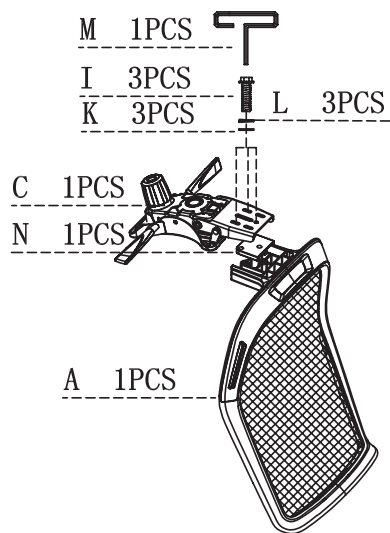


Step 2: Attach seat cushion (B) by using the Allen Wrench (M) to secure screws (H) and (I).

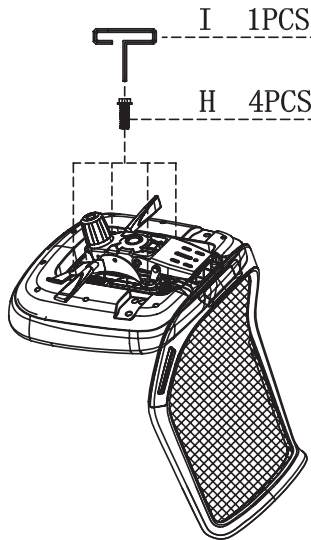


Step 3: To attach the chair arms (D), use the Allen Wrench (M) to secure screws (J) to the seat.

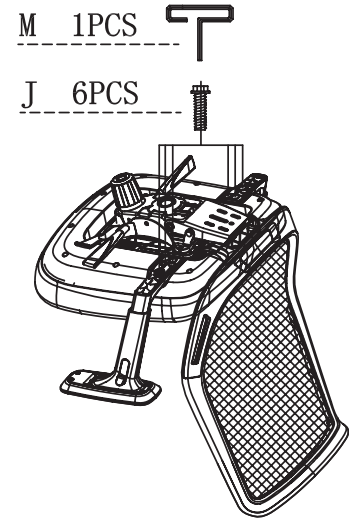

Step 4: (OPTIONAL) If attaching the headrest (O), use screws (P) and Allen Wrench (Q).

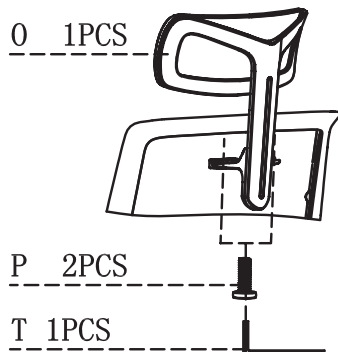

Step 5: First, Press casters (G) into base (F). Attach cylinder (E) to base (F) by using 2 people to lift the chair body onto the gas cylinder.

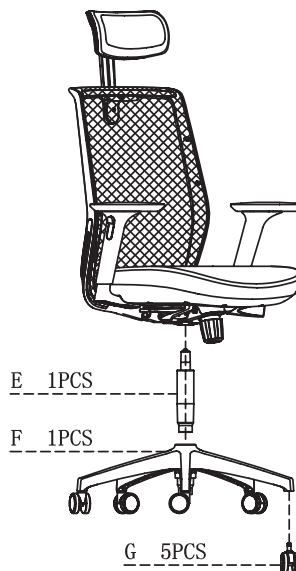

Warnings

1. This product should be used only one person at a time.
2. Do not use this chair unless all bolts, screws and knobs are securely tightened.
3. Save spanner wrench. Check that all bolts, screws and knobs are tight every three months or as needed.
4. Dispose of packing material properly. Do not use the plastic cover as a head covering. It may cause suffocation.
5. Do not use the chair as a stepladder. Use this chair for its intended purpose only.