

Models 902 / 902-DK / 902-VAM / 902-VAM-DK UtiliStool

Parts Listing

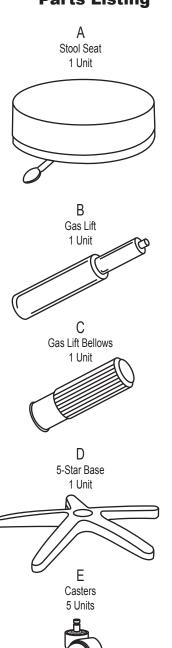

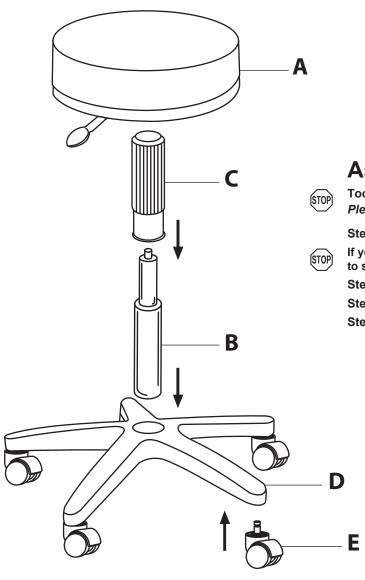

Assembly Instructions:

Tools Needed: Philips Head Screwdriver

Please read all instructions before assembly.

Step 1: Insert Casters (E) into 5-Star Base (D).

If you are assembling a model with a DK Foot Ring please proceed to subsequent pages for drafting kit assembly instructions.

Step 2: Insert Gas Lift (B) into 5-Star Base (H).

Step 3: Cover Gas Lift (B) with Gas Lift Bellows (C).

Step 4: Carefully place Stool Seat (A) onto the Gas Lift (B), aligning the holes. Press down on Stool Seat (A)

to secure onto 5-Star Base (D).

WEIGHT CAPACITY: 250 lbs.

CAUTION:

- 1. Do not use this stool as a step ladder.
- 2. Check for loose screws and tighten them every 6 months.




161 Tradition Trail, Holly Springs, NC, 27540 800-520-7471 (voice) 919-362-4765 (fax) 919-303-6389 (voice) www.ofminc.com support@ofminc.com


Model DK-2 Drafting Kit Assembly

Parts Listing


A Circular Foot Rest 1 Unit




B Tension Knob 1 Unit



C 9" Extension Tube 1 Unit



D 12" Extension Tube 1 Unit

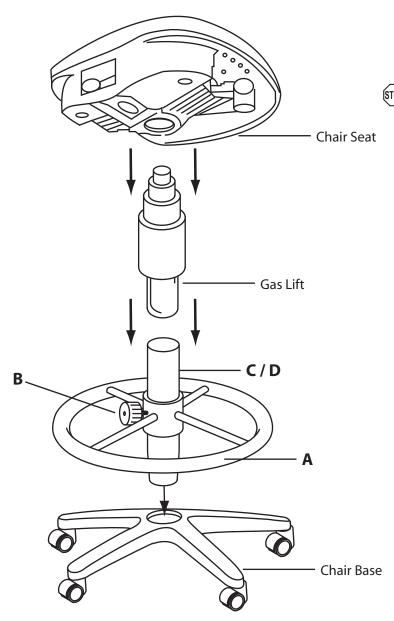

Assembly Instructions

Please read all instructions before assembly.

Prior to assembly, select only one Extension Tube for desired Height

9" Extension Tube will change seat height from 24"-28" 12" Extension Tube will change seat height from 27-31"

- Step 1: Slide the Circular Foot Rest (A) over the smaller tapered end of your chosen Extension Tube (C / D).
- **Step 2:** Screw in Tension Knob (B) and tighten to lock Foot Rest (A).
- Step 3: Place the tapered end of Extension Tube (C / D) into your Chair Base.
- **Step 4:** Insert bottom of Gas Lift Cylinder into the top end of the Extension Tube (C / D).
- Step 5: Place the Chair Seat onto the Gas Lift by inserting top of Gas Lift into the hole in the Seat Mechanism.
- Step 6: Press down firmly to secure the chair.

Note: Save the left over extension tube for future use.

