


Congratulations on the purchase of your new *Signature Series* chair!

PARTS



PART A
CHAIR BACK
QTY: 1



PART B
SEAT CUSHION
QTY: 1



PART C
ARMRESTS (L/R)
QTY: 2



PART D
SEAT LIFT
QTY: 1



PART E
BASE
QTY: 1



PART F
CASTER
QTY: 5



PART G
SCREW
QTY: 11



SPANNER
(SAVE FOR FUTURE
TIGHTENING)






CUSTOMER SERVICE HOTLINE
800-626-6060

INSTRUCTIONS

Remove all parts from carton and verify part quantities as indicated on parts list.

- ① Insert the caster (F) into the hole at the bottom of the five prong base (E).
- ② Insert the bottom end of the seat lift (D) into the center hole of the base (E).
- ③ Connect the chair back (A) and seat cushion (B) as shown, aligning the hole in the seat back with the hole in the seat cushion. Using the spanner, connect the seat back to the seat cushion with five screws (G).
- ④ Place the chair body onto the small end of the seat lift (D).
- ⑤ Insert armrests (C) into holes located at sides of seat. Insert six screws into the holes from the underside of the seat. Tighten screws (G) with spanner.

Attention: MAKE SURE ALL SCREWS ARE FULLY TIGHTENED BEFORE USING CHAIR.

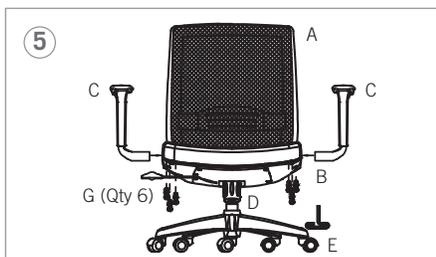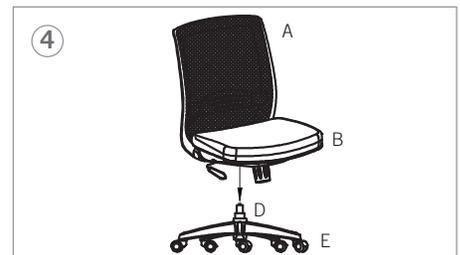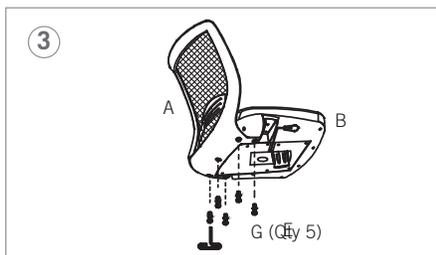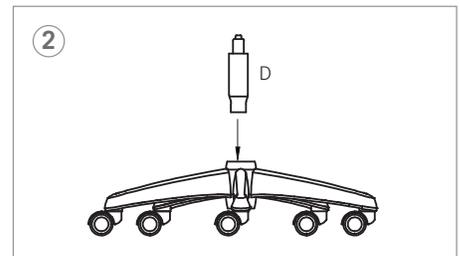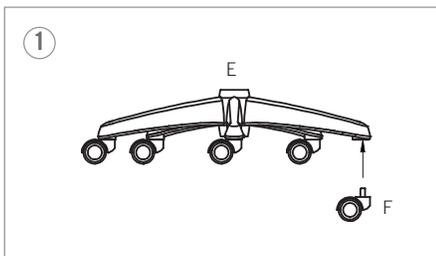

Warnings

1. This product should be used by only one person at a time.
2. Do not use this chair unless all bolts, screws and knobs are securely tightened.
3. **Save spanner wrench.** Check that all bolts, screws and knobs are tight every three months or as needed.
4. Dispose of packing material properly. Do not use the plastic cover as a head covering. It may cause suffocation.
5. Do not use the chair as a stepladder. Use this chair for its intended purpose only.




Signature Series

800-558-1010

www.NBF.com



C² CHAIR ERGONOMIC FEATURES

ADJUSTMENTS

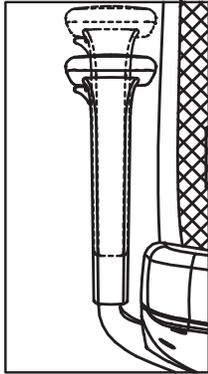


Press the button located on the side of the armrest to adjust the armrest up and down.

Button

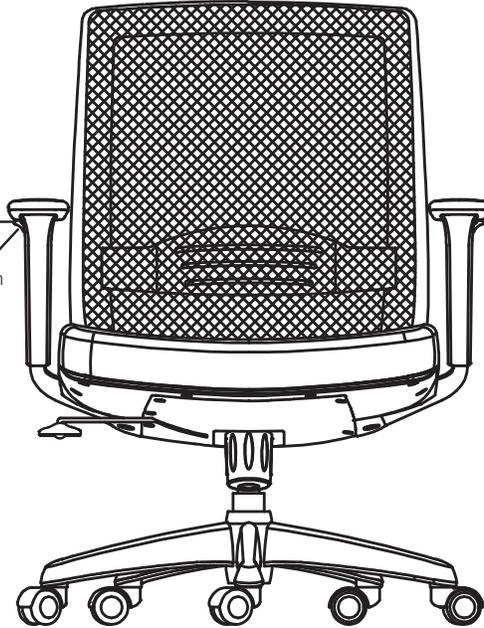


A



B

A Turn this button to adjust seat height

B Pull the handle for tilt lock control

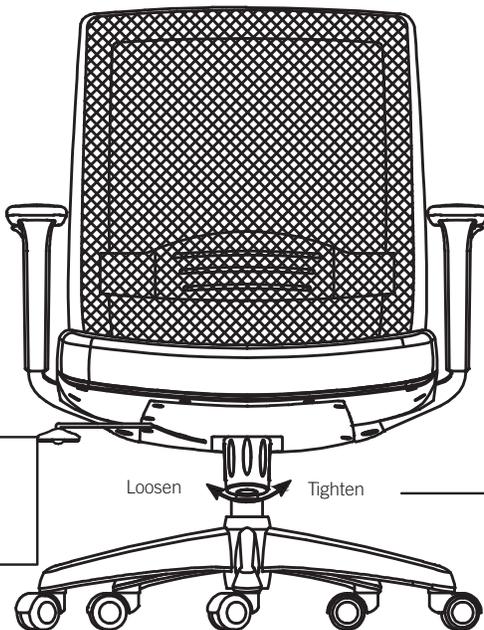

Loosen

Tighten

Turn to adjust tilt tension

CUSTOMER SERVICE HOTLINE
800-626-6060

WWW.NBF.COM