



Congratulations on the purchase of your new *Signature Series* product!

COMPONENTS

(A) Mounting Bracket - 1pc



(B) Dual Monitor Arm - 1pc



HARDWARE & TOOLS

(C) Screws M6*13 - 3pcs



(D) Nut M6 - 3pcs




(E) Allen Key(4mm) - 1pc



(F) Spanner (10mm) - 1pc





(G) Spanner (13 mm) - 1pc



(H) Monitor Mount Kit - 2 bags
4pcs of each item





(I) Cable clamp - 4pcs



INSTRUCTIONS

STEP 1


Set part Mounting bracket(A)

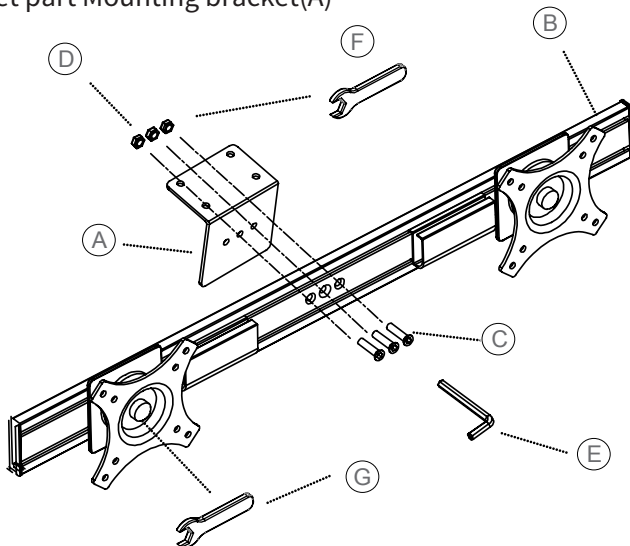

NOTE:

Make sure the opening of "Up" is facing upwards.



Rotate bracket to assemble the arm at a taller height

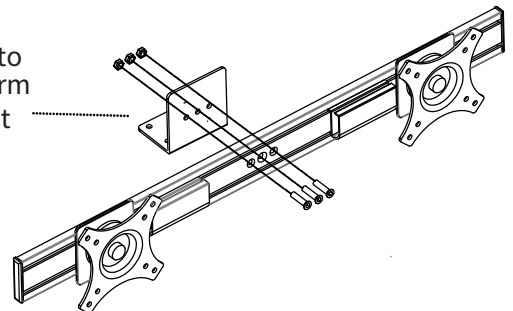

Congratulations on the purchase of your new *Signature Series* product!


INSTRUCTIONS

STEP 2

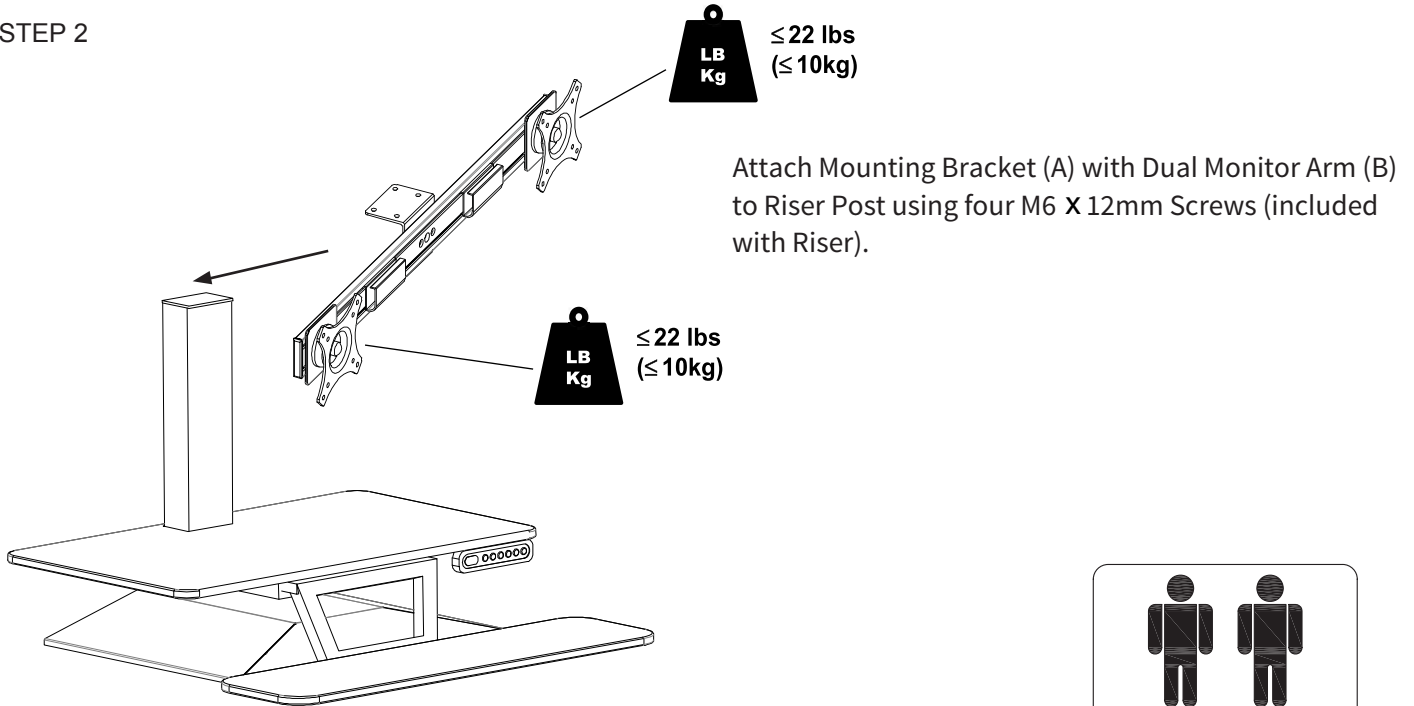


STEP 3

Attach monitor to mounting plate using hardware in Monitor Mount Kit (H).

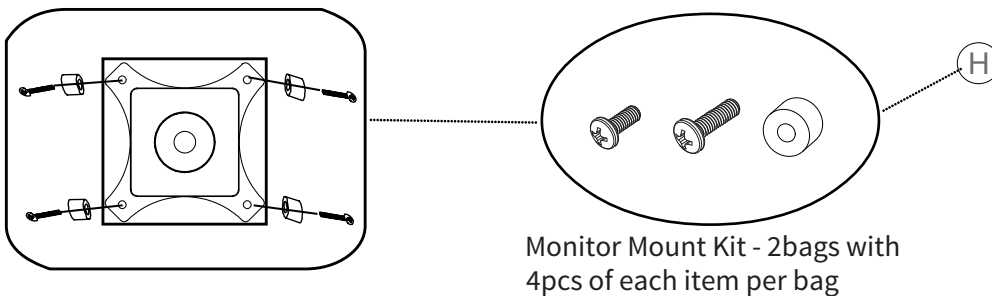

Use 13mm Spanner (G) for tightening Mounting Plate on Dual Monitor Arm(B). If Mounting Plate is loose, remove center plastic cover and tighten screw with 13mm Spanner (G).

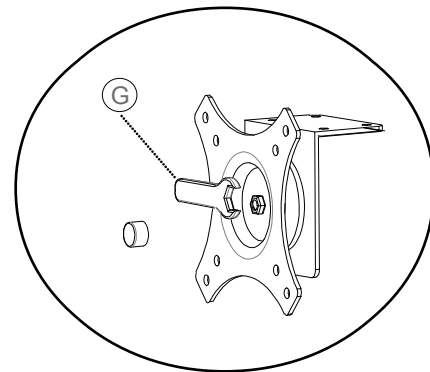

CAUTION: DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY. SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!