



Leaders in Reception Seating

Lesro Industries, Inc.  
1 Griffin Road South  
Bloomfield, CT  
06002

Phone  
860.243.3226  
Fax  
860.243.5392  
www.lesro.com

# Assembly Instructions For Newport Benches

**Tools required:** Phillips screwdriver, Allen wrench (included in hardware pack).

**Note:** These instructions are intended for various models and configurations. Your products may not look exactly as those shown in the diagrams.

**Important:** The assembly process requires that some hardware be kept loose until later in the sequence. Follow these instructions closely to ensure correct assembly.

**Recommendation:** Retighten all bolts on a seasonal basis to ensure your product remains strong and stable for many years of use.



**Weight Capacity:** 2-Seat Bench 550 lbs. 3-Seat Bench 550 lbs.

## Parts List


Seat Cushion  
Leg Frames, 2 pcs.  
Cross Tubes, 2 pcs.

## Hardware Pack

$\frac{5}{8}$ " Allen Bolts, 8 pcs.  
2  $\frac{3}{8}$ " Allen Bolts:  
8 pcs. for 2-Seat  
10 pcs. for 3-Seat  
Allen Wrench

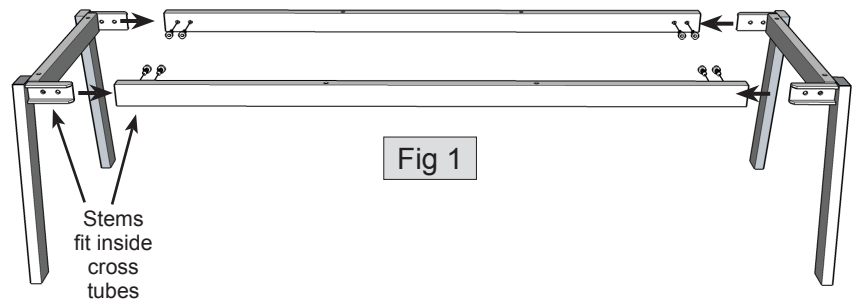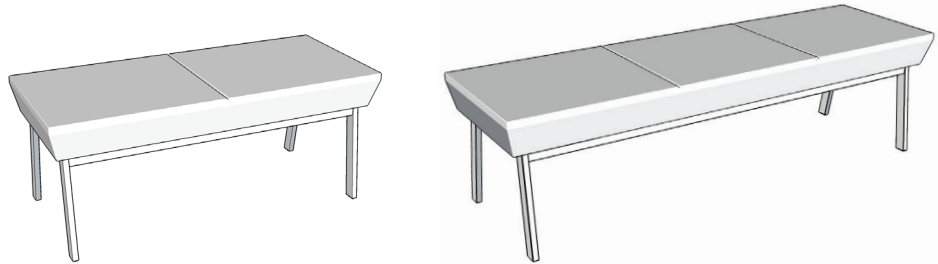

1. Unpack and identify all parts. Note: Leg frames are interchangeable - no left or right.
2. Connect cross tubes between leg frames, as shown in figure 1. Stems on leg frames slide inside cross tubes. Attach using  $\frac{5}{8}$ " Allen bolts. Keep bolts slightly loose for now.
3. Place seat cushion upside down on a clean surface.
4. Place leg frame assembly on cushion, as shown in figure 2. Align holes and attach using 2  $\frac{3}{8}$ " Allen bolts. Once all bolts are started, tighten all securely.
5. Tighten  $\frac{5}{8}$ " Allen bolts from step 2 securely.
6. Your product is now assembled and ready to use.

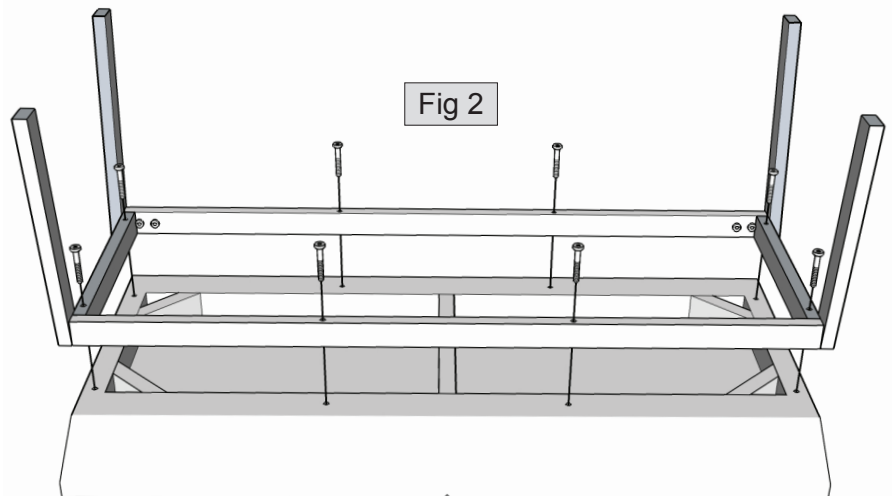

Thank you for purchasing a Lesro product.  
Need assistance with assembly? Call Lesro customer service 1-800-275-7545.  
Visit us online at [www.lesro.com](http://www.lesro.com)