

CLARASEA™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC MOSAICS

AMERICAN OLEAN®



MARBLE LOOK



AMERICAN OLEAN®
PROVEN IN TILE™

CLARASEA™

Celebrate the return of the roaring '20s with the encaustic floor tile and mosaic collection, Clarasea. Inspired by the lavish lifestyle era, Clarasea offers geometric designs drizzled with metallic accents on 8 x 8 porcelain floor tile. Complete the ensemble with marble look mosaics, perfect for shower floor installations and more.



Cover photo features Clarasea™ Couture 8 x 8 on the floor.
Above photo features Clarasea™ Metropolitan 8 x 8 on the floor and Clarasea™ Majestic penny round mosaic on the wall.

FINISHES: MATTE

USAGE  FLOOR  WALL  COUNTERTOP  SHOWER FLOOR  EXTERIOR FLOOR	MATERIAL  PG  CG	PRICING  LOW HIGH	SPECIAL FEATURES  STEPWISE™  TRUEDGE™  MADE IN THE U.S.A.  LARGE FORMAT  MOSAIC/DECO  ENCAUSTIC  TERRAZZO  PAVER  CUSTOMIZE
--	---	--	---

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK

FLOOR TILE



METROPOLITAN CL90



BELMONT CL91




COUTURE CL92

1-1/2" HEXAGON MOSAIC - 12 x 10 SHEET



MAJESTIC CL93

PENNY ROUND MOSAIC - 13 x 11 SHEET

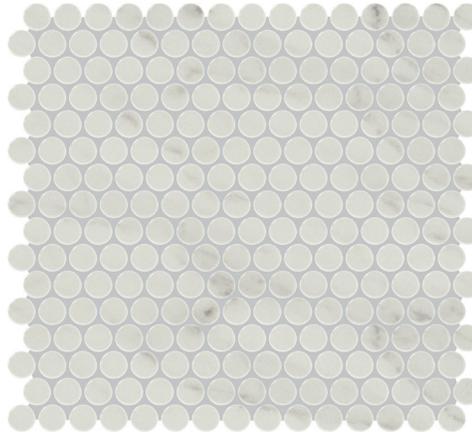

MAJESTIC CL93



VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE

USAGE	MATERIAL	PRICING	SPECIAL FEATURES
FLOOR WALL COUNTERTOP SHOWER FLOOR EXTERIOR FLOOR	PG CG	LOW HIGH	STEPWISE™ TRUEEDGE™ MADE IN THE U.S.A. LARGE FORMAT MOSAIC/DECO ENCAUSTIC TERRAZZO PAVER CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	8 x 8 Floor Tile	7-15/16" x 7-15/16" (20.26 cm x 20.26 cm)	5/16"	11.00	25
	1-1/2 Hex Mosaic (Dot-mounted)	11-5/8" x 10-1/4" Sheet (29.53 cm x 26.04 cm)	1/4"	9.72	12
	Penny Round Mosaic (Dot-mounted)	13-3/8" x 11-3/8" Sheet (33.97 cm x 28.89 cm Sheet)	1/4"	10.60	10

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	●
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●*

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Floor tile is suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates when proper installation methods are followed.

Mosaic tile is suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates when proper installation methods are followed.

* Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	HIGH (Floor - V3) RANDOM (Mosaic - V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	<3.0%
Breaking Strength	C648	> 275 lbs.	>250 lbs.
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Use of a latex modified thin-set is recommended for installation. For more information, visit americanolean.com.

FEATURES

	POST-CONSUMER RECYCLED MATERIALS		PRE-CONSUMER RECYCLED MATERIALS
--	----------------------------------	--	---------------------------------

REVEAL IMAGING®

MEMBER	CERTIFIED PORCELAIN TILE 0.5% or less water absorption	Healthy Homes Healthy Planet

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

