

FLOOR

CREEKWOOD™
GLAZED PORCELAIN



Photo features Creekwood Maple Lake 6 x 36 on the floor.

CREEKWOOD™ GLAZED PORCELAIN FLOOR WITH REVEAL IMAGING®

Creekwood™ by American Olean® provides the warmth and ambiance of natural wood flooring with the durability of a porcelain tile. The 6 x 36 size allows for traditional wood-plank installations in settings that demand higher performance and functionality than wood provides. With slight undulations, linear wood grains, and realistic 'knots', Creekwood utilizes Reveal Imaging® to create an authentic wood look on a porcelain body.

CREEKWOOD™

GLAZED PORCELAIN FLOOR TILE




BIRCH STREAM CW96



MAPLE LAKE CW97



ASH RIVER CW99

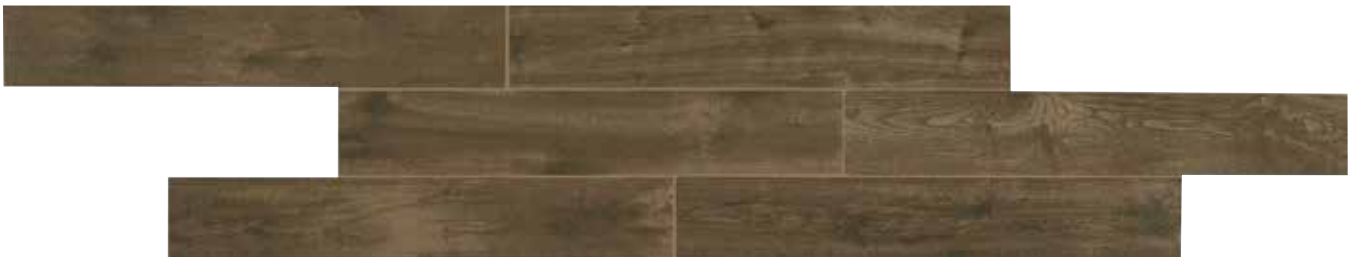

WALNUT BROOK CW98



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.


AMERICANOLEAN.COM

FLOOR



Photo features Creekwood™ Ash River 6 x 36 on the floor.

SIZES

| | | | THICKNESS | SQ. FT./ CARTON | PIECES/ CARTON |
|---|----------------------|--|-----------|--------------------|-------------------|
|  | 6 x 36 Floor Tile | 5-7/8" x 35-7/16" (15.00 cm x 90.00 cm) | 5/16" | 13.05 | 9 |

TRIM

| | | | NUMBER | PIECES/ CARTON |
|---|----------------|--------|--------|-------------------|
|  | Floor Bullnose | 3 x 18 | S-43H9 | 16 |

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)

RELATIVE PRICING: Medium

SHADE VARIATION



HIGH
(V3)

PERFORMANCE CHARACTERISTICS

| | ASTM# | FLOOR RESULT |
|---------------------|-------|----------------------------------|
| Water Absorption | C373 | < 0.5% |
| Breaking Strength | C648 | > 275 lbs. |
| Scratch Hardness | MOHS | 8.0 |
| Chemical Resistance | C650 | Resistant |
| Abrasion Resistance | C1027 | 3 (CW98) 4 (CW96, CW97, CW99) |

For additional information on test results, visit us at: americanolean.com/information/TestResults.

USAGE

| FLOORS | WALLS | COUNTERTOPS |
|--------|-------|-------------|
| F | W | C |

APPLICATIONS

| | TARGET DCOF WET | SUITABLE |
|--|--------------------|----------|
| Dry & Level – Interior Floor | N/A | ● |
| Wet & Level – Interior Floor | ≥ 0.42 | ● |
| Shower Floors (Residential or Light Commercial) | ≥ 0.42 | |
| Exterior Floor Applications (including pool decking & other wet areas with minimal footwear) | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | ● |
| Countertops | N/A | ● |
| Pool Linings | N/A | |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit americanolean.com.



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.