

DANYA™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC MOSAIC


AMERICAN OLEAN®



STONE LOOK



AMERICAN OLEAN®

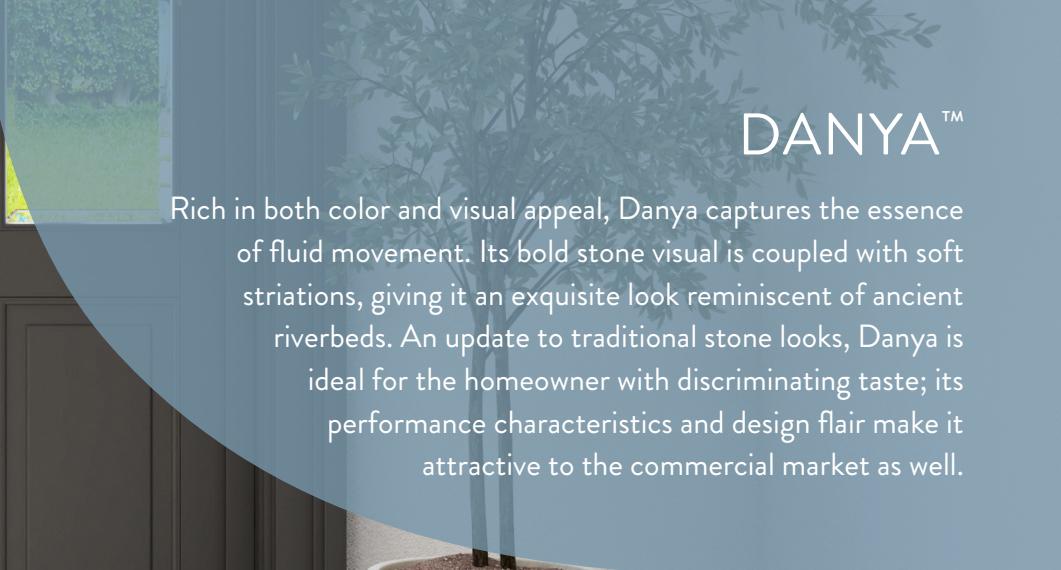

DANYA™

Rich in both color and visual appeal, Danya captures the essence of fluid movement. Its bold stone visual is coupled with soft striations, giving it an exquisite look reminiscent of ancient riverbeds. An update to traditional stone looks, Danya is ideal for the homeowner with discriminating taste; its performance characteristics and design flair make it attractive to the commercial market as well.



Cover and above photo features Danya™ Stream, 3 x 3 mosaic on the inset and 12 x 12 on the outer floor with Historic Bridge™ Old Forge, 6 x 36 as a decorative border.

FINISHES: MATTE

USAGE	MATERIAL	PRICING	SPECIAL FEATURES
 FLOOR  WALL  COUNTERTOP  SHOWER FLOOR  EXTERIOR FLOOR	 PG GLAZED PORCELAIN  CG GLAZED CERAMIC	 LOW  HIGH	 STEPWISE™  TRUEEDGE™  REVEAL SYNC3D™  MADE IN THE U.S.A.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

STONE LOOK

## GLAZED PORCELAIN FLOOR TILE



STREAM DY01



COVE DY02



BASIN DY04

## GLAZED CERAMIC STRAIGHT-JOINT MOSAIC TILE



STREAM DY01



COVE DY02



BASIN DY04



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHY TILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

## FINISHES: MATTE

USAGE	MATERIAL	PRICING	SPECIAL FEATURES
 FLOOR  WALL  COUNTERTOP  SHOWER FLOOR  EXTERIOR FLOOR	 PG GLAZED PORCELAIN  CG GLAZED CERAMIC		 STEPWISE™  TRUEDGE™  REVEAL SYNC3D™  MADE IN THE U.S.A.  LARGE FORMAT  MOSAIC/ DECO  ENCAUSTIC  TERRAZZO  PAVER  CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## SIZES

		THICKNESS	FINISH	MADE IN U.S.A.
	12 x 24 Floor Tile	11-13/16" x 23-13/16" (30.00 cm x 60.48 cm)	5/16"	 M
	12 x 12 Floor Tile	13-1/8" x 13-1/8" (33.30 cm x 33.30 cm)	5/16"	 M
	3 x 3 Straight-Joint Mosaic Tile (Dot-mounted)	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	 M

Made in the U.S.A. designation is subject to change. Please visit [americanolean.com](http://americanolean.com) for the most current manufacturing information. Matte Finish

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors - Standard Center Drain	≥ 0.42	 *
Shower Floors - Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	 *
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	 *

A DCOF value of  $\geq 0.42$  is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

## APPLICATION NOTES:

Floor tiles suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

\* Mosaic tile only

## FEATURES

 PRE-CONSUMER RECYCLED MATERIALS	 POST-CONSUMER RECYCLED MATERIALS
 REVEAL IMAGING®	



ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).

## STONE LOOK

## TRIM

	NUMBER	FINISH
	Floor Bullnose	3 x 12
	Cove Base	6 x 12
	Cove Base Outcorner	1 x 6

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

 Matte Finish

## INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	 HIGH (V3)
Mosaic Tile: 1/8"	

## PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbf	>250 lbf
Scratch Hardness	C1895	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## DURABILITY

## Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	 4 All Residential / Commercial

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit [americanolean.com](http://americanolean.com).

888.AOT.TILE



AMERICAN OLEAN®