

# DEBONAIR ESTATE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC

AMERICAN OLEAN®



WOOD LOOK



AMERICAN OLEAN®  
PROVEN IN TILE

# DEBONAIR ESTATE™

Debonair Estate takes a sophisticated approach to the natural essence of wood. This ColorBody™ porcelain tile, available in an 8 x 48 plank and an ultra-modern 1 x 24 mosaic, was inspired by Nordic minimalist design. Crafted with RevealSync 3D™, our new glazing technology that synchronizes the wood graphic and the structure for a truly authentic design. Debonair Estate achieves the timeless style of natural hardwood without the hassle.



















Cover photo features Debonair Estate™ Ebony, 1 x 24 mosaic on the shower wall. Above photo features Debonair Estate™ Heirloom, 8 x 48 on the floor, Mirasol™ Bianco Carrara, 2 x 4 on the backsplash.

# DEBONAIR ESTATE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC

AMERICAN OLEAN®

FINISHES: MATTE

<b>USAGE</b>  FLOOR  WALL  COUNTERTOP  SHOWER FLOOR  EXTERIOR FLOOR			<b>MATERIAL</b> 	<b>PRICING</b> 	<b>SPECIAL FEATURES</b>  STEPWISE™  TRUEEDGE™  MADE IN THE U.S.A.  LARGE FORMAT  MOSAIC/DECO  ENCAUSTIC  TERRAZZO  PAVER  CUSTOMIZE					
--	--	--	--	---	--	--	--	--	--	--


NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## WOOD LOOK

### FLOOR TILE




PARCHMENT DE06



ANTIQUE DE07



HEIRLOOM DE08

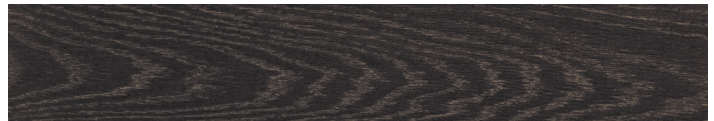

EBONY DE09


### 1 x 24 MOSAIC



PARCHMENT DE06



ANTIQUE DE07

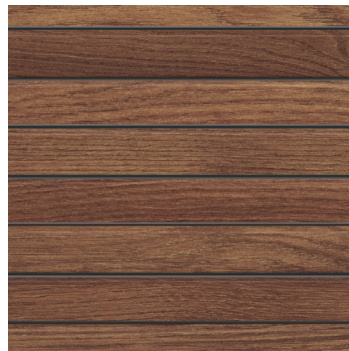

HEIRLOOM DE08



EBONY DE09

							
SLIP RESISTANT	WATERPROOF	STAINPROOF	DENTPROOF	SCRATCH-RESISTANT	FIRE-RESISTANT <small>Not Applicable to Mark-Measured Material</small>	CLIMATEPRO™	SIMPLICLEAN™

















VISIT [AMERICANOLEAN.COM/WHYTILE](http://AMERICANOLEAN.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# DEBONAIR ESTATE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC

AMERICAN OLEAN®



FINISHES: MATTE

<b>USAGE</b>  FLOOR  WALL  COUNTERTOP  SHOWER FLOOR  EXTERIOR FLOOR	<b>MATERIAL</b> 	<b>PRICING</b> 	<b>SPECIAL FEATURES</b>  STEPWISE™  TRUEEDGE™  MADE IN THE U.S.A.  LARGE FORMAT  MOSAIC/ DECO  ENCAUSTIC  TERRAZZO  PAVER  CUSTOMIZE
--	--	---	---

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## WOOD LOOK

### SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	8 x 48 Floor Tile	7-3/4" x 46-15/16" (19.70 cm x 119.20 cm)	5/16"	15.18	6
	1 x 24 Mosaic (Mesh-mounted)	11-5/8" x 23-3/8" Sheet (29.56 cm x 59.44 cm Sheet)	5/16"	7.56	4

### APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors - Standard Center Drain (Residential and Light Commercial)	≥ 0.42	
Shower Floors - Linear Drain	≥ 0.42	●*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	


A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

#### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

\* Mosaic tile is suitable for use in linear showers when length of mosaic is installed parallel with the slope.

### INSTALLATION

Grout Joint Recommendation	Shade Variation
<b>Floor:</b> 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.) <b>Mosaic:</b> 1/8"	 <b>HIGH (V3)</b>

### PERFORMANCE CHARACTERISTICS

	ASTM#	RESULTS
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

### DURABILITY

#### Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	④ All Residential / Commercial

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

### FEATURES

 PRE-CONSUMER RECYCLED MATERIALS  MADE IN THE U.S.A.

 REVEALSNC 3D™

 CERTIFIED PORCELAIN TILE  
0.5% or less water absorption



 ZERO TO X  
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).

888.AOT.TILE



AMERICAN OLEAN®  
PROVEN IN TILE™