# DEBONAIR ESTATE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC TILE

AMERICAN OLEAN®

WOOD LOOK



AMERICAN OLEAN®

# DEBONAIR ESTATE™

Debonair Estate takes a sophisticated approach to the natural essence of wood. This ColorBody™ porcelain tile, available in an 8 x 48 plank and an ultra-modern 1 x 24 mosaic, was inspired by Nordic minimalist design. Crafted with RevealSync3D™, a glazing technology that synchronizes the wood graphic and the structure for a truly authentic design. Debonair Estate achieves the timeless style of natural hardwood without the hassle.




AMERICAN OLEAN

PROVEN IN TILE

Cover photo features Debonair Estate™ Ebony, 1 x 24 mosaic on the shower wall and Unglazed Mosaics™ Wisdom, Matte Ice White, and Matte Black, 1 x 1 Hexagon Mosaic in a custom pattern on the floor.
Above photo features Debonair Estate™ Heirloom, 8 x 48 on the floor, Mirasol™ Bianco Carrara, 2 x 4 on the backsplash.

# DEBONAIR ESTATE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC TILE

AMERICAN OLEAN®

FINISHES: MATTE

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: PC COLORBODY PORCELAIN

PRICING: $ LOW — HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

WOOD LOOK


## FLOOR TILE



PARCHMENT DE06



ANTIQUE DE07

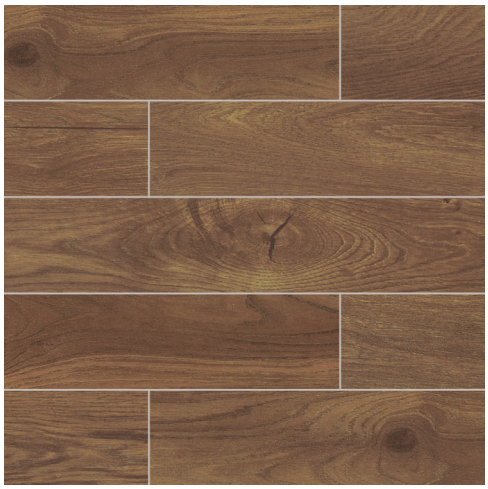

HEIRLOOM DE08



EBONY DE09

## 1 x 24 MOSAIC TILE



PARCHMENT DE06



ANTIQUE DE07



HEIRLOOM DE08



EBONY DE09

SLIP RESISTANT | WATERPROOF | STAINPROOF | DENTPROOF | SCRATCH-RESISTANT | FIRE-RESISTANT* (*Not Applicable to Mesh-Mounted Mosaics) | CLIMATEPRO™ | SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# DEBONAIR ESTATE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC TILE

AMERICAN OLEAN®

FINISHES: MATTE

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: PC COLORBODY PORCELAIN

PRICING: $ LOW — HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

WOOD LOOK

## SIZES

| | | | THICKNESS | FINISH | MADE IN THE U.S.A. |
|---|---|---|---|---|---|
| | 8 x 48 Floor Tile | 7-3/4" x 46-15/16" (19.70 cm x 119.20 cm) | 5/16" | M | |
| | 1 x 24 Mosaic Tile (Mesh-mounted) | 11-5/8" x 23-3/8" Sheet (29.56 cm x 59.44 cm Sheet) | 5/16" | M | |

Made in the U.S.A. designation is subject to change. Please visit americanolean.com for the most current manufacturing information.

M Matte Finish

## APPLICATIONS

| | TARGET DCOF WET | SUITABLE |
|---|---|---|
| Dry & Level – Interior Floor | N/A | ● |
| Wet & Level – Interior Floor | ≥ 0.42 | ● |
| Shower Floors - Standard Center Drain | ≥ 0.42 | |
| Shower Floors - Linear Drain | ≥ 0.42 (Mosaic)<br>≥ 0.60 (Floor) | |
| Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear) | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | ● |
| Countertops | N/A | ● |
| Pool Linings | N/A | |

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

**APPLICATION NOTES:**

Floor tile is suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic tile is suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Floor and mosaic tile only

## FEATURES

PRE-CONSUMER RECYCLED MATERIALS

REVEALSYNC 3D™

CERTIFIED PORCELAIN TILE 0.5% or less water absorption

U.S. GREEN BUILDING COUNCIL MEMBER

ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

## INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|---|---|
| **Floor: Tile** 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)<br>**Mosaic Tile:** 1/8" | HIGH (V3) |

## PERFORMANCE CHARACTERISTICS

| | ASTM# | RESULTS |
|---|---|---|
| Water Absorption | C373 | < 0.5% |
| Breaking Strength | C648 | > 275 lbf |
| Scratch Hardness | C1895 | 8.0 |
| Chemical Resistance | C650 | Resistant |

For additional information on test results, visit us at: americanolean.com/information/TestResults.

## DURABILITY

**Floor Surface Wear Resistance**

| | | | |
|---|---|---|---|
| 1 | Residential Bathrooms | 3 | All Residential / Light Commercial |
| 2 | All Residential Areas | (4) | All Residential / Commercial |

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



©2026 AMERICAN OLEAN (02/26)