FOYER™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

MARBLE LOOK

AMERICAN OLEAN®

PROVEN IN TILE™

FOYER™

Step into elegance with Foyer, a marble look porcelain tile designed to set the tone for refined living. Available in three sophisticated colors, this series captures the drama of bold veining with the everyday practicality of ColorBody™ porcelain. Choose from expansive large-format sizes for a seamless, luxurious foundation, or add dimension with coordinating mosaics that bring artistry and detail to your design. With Foyer, your entryway—or any room—becomes a canvas of timeless beauty that welcomes and inspires.

AMERICAN OLEAN

PROVEN IN TILE

Cover photo features Contrast 24 x 48 on the floor & wall and Hexagon mosaic surrounding the bath tub.
Above photo features Foyer™ Steely 12 x 24 on the floor and Conrad Brick™ Linen 2 x 8 on the fireplace.

FOYER™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE | POLISHED

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: PC COLORBODY PORCELAIN

PRICING: LOW — HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK

FLOOR TILE

SUMMIT FY02

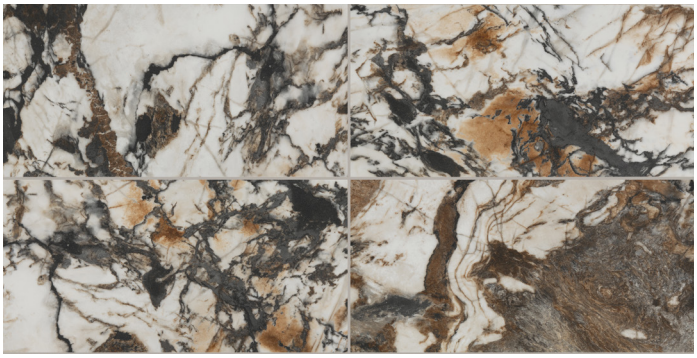

CONTRAST FY03

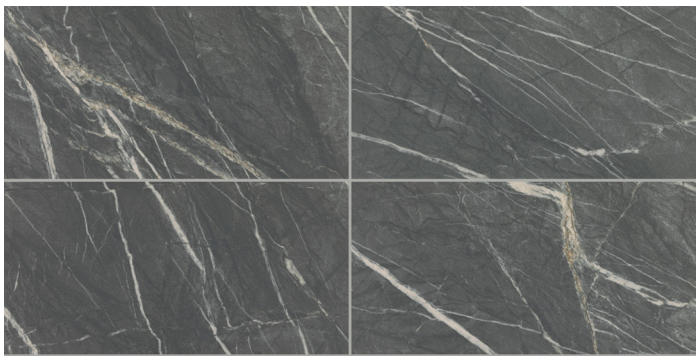

STEELY FY04

3" LANDMARK HEXAGON MOSAIC TILE

SUMMIT FY02

CONTRAST FY03

STEELY FY04

3" HEXAGON MOSAIC TILE



SUMMIT FY02



CONTRAST FY03



STEELY FY04

SLIP RESISTANT | WATERPROOF | STAINPROOF | DENTPROOF | SCRATCH-RESISTANT™ (Applicable to products with Matte and Textured Finishes) | FIRE-RESISTANT™ (Not Applicable to Mesh-Mounted Mosaics) | CLIMATEPRO™ | SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FOYER™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE | POLISHED

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: COLORBODY PORCELAIN

PRICING: LOW — HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK

SIZES

			THICKNESS	FINISH	MADE IN U.S.A.
	24 x 48 Floor Tile	23-3/8" x 46-7/8" (59.44 cm x 119.20 cm)	5/16"	M P	
	12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M P	
	3" Hexagon Mosaic (Mesh-mounted)	12-1/8" x 14-5/8" Sheet (30.80 cm x 37.15 cm Sheet)	5/16"	M	
	3" Landmark Hexagon Mosaic (Mesh-mounted)	17" x 11-1/2" Sheet (43.18 cm x 29.21 cm Sheet)	5/16"	P	

M Matte Finish P Polished Finish

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors - Standard Center Drain	≥ 0.42	●**
Shower Floors - Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	●**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●***

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, (provided it is noted as suitable in the applications chart above) when proper installation methods are followed.

* Matte finish only.

** Matte mosaic tile only.

*** Mosaic tile only.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

CERTIFIED PORCELAIN TILE 0.5% or less water absorption

U.S. GREEN BUILDING COUNCIL MEMBER

ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

TRIM

			NUMBER	FINISH
	Floor Bullnose	3 x 24	P43F9	M P

M Matte Finish P Polished Finish

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.) **Mosaic Tile:** 1/8"	**RANDOM** (V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	RESULTS
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0 (Matte) 6.0 (Polished)
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	(4)	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

©2025 AMERICAN OLEAN (10/25)