

MERIT™

GLAZED PORCELAIN FLOOR WITH STEPWISE™ TECHNOLOGY

AMERICAN OLEAN®



STONE LOOK



AMERICAN OLEAN®
PROVEN IN TILE™

MERIT™

Created to emulate the look of contemporary stone, Merit by American Olean opens doors to new design opportunities. Featuring StepWise™, a revolutionary technology providing superior slip resistance, Merit is perfect for open-concept environments where indoor living extends outdoors. Beautifully realistic veining and variation is available in four neutral shades with large format sizing. Suitable for both residential and commercial settings, Merit offers design sophistication both inside and out.



STEPWISE™

**50% MORE
SLIP RESISTANT
THAN ORDINARY TILE***

*When compared to tile meeting ANSI standards



Cover photo features Merit Cool Beige 12 x 24 on the interior and exterior floors and Historic Bridge™ Upper Ferry 6 x 36 on the fireplace. Above photo features Merit Light Gray 12 x 24 on the floor.

MERIT™

GLAZED PORCELAIN FLOOR WITH STEPWISE™ TECHNOLOGY

AMERICAN OLEAN®

FINISHES: GLOSSY

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR




EXTERIOR FLOOR

MATERIAL



PG
GLAZED
PORCELAIN

PRICING



LOW HIGH

SPECIAL FEATURES



STEPWISE™



TRUEEDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

STONE LOOK


FLOOR TILE



COOL BEIGE ME07



LIGHT GRAY ME08

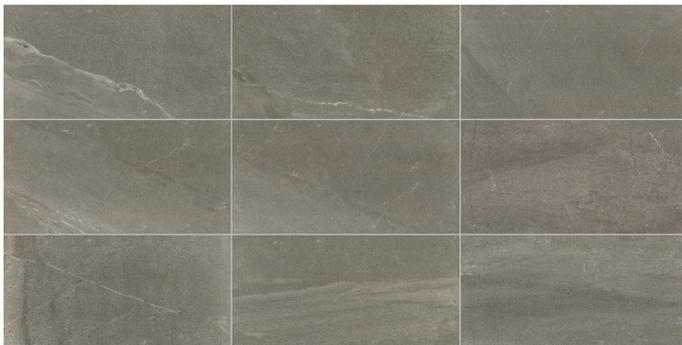

DARK GRAY ME09



50% MORE
SLIP RESISTANT
THAN ORDINARY TILE*



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



INDOOR/OUTDOOR



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: GLOSSY


USAGE



MATERIAL



PRICING



SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

STONE LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	12 x 24 Floor Tile	11-7/8" x 23-5/8" (30.23 cm x 60.12 cm)	5/16"	17.60	9

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	●
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

FEATURES

POST-CONSUMER RECYCLED MATERIALS

PRE-CONSUMER RECYCLED MATERIALS

MADE IN THE U.S.A.

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	P43C9	30

Floor bullnose trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)</p>	<p>HIGH (V3)</p>

PERFORMANCE CHARACTERISTICS

	ASTM#	RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit americanolean.com

