

MINIMUM™

AMERICAN OLEAN®



COLORBODY™ PORCELAIN FLOOR

FLOOR

STONE LOOK



AMERICAN OLEAN®
PROVEN IN TILE™

MINIMUM™

Minimum™ features both durability and beauty in design. It has the versatility and functionality for both residential and commercial installations. Available in 6 on trend colors, this TruEdge™ rectified and modular collection offers unique design possibilities by combining multiple surface textures and sizes. Minimum™ comes in 12x24 and 24x24 and features a 4x24 bullnose in both matte and polished finishes.



FLOOR

FINISHES: MATTE | POLISHED | TEXTURED

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR

MATERIAL



PC
COLORBODY
PORCELAIN

PRICING



LOW HIGH

SPECIAL FEATURES



TLE
TRUEEDGE™



LARGE
FORMAT

STONE LOOK


COLORBODY™ PORCELAIN FLOOR TILE




WHITE MN40




BEIGE MN41

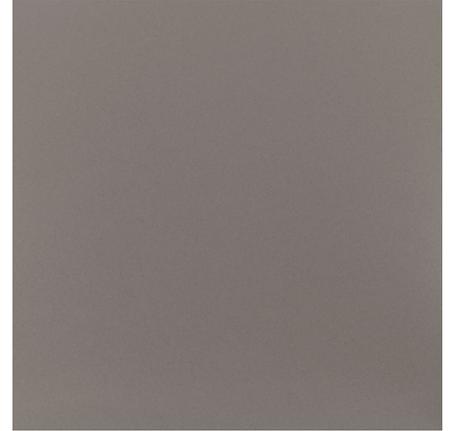


TAUPE MN42



LIGHT GRAY MN43

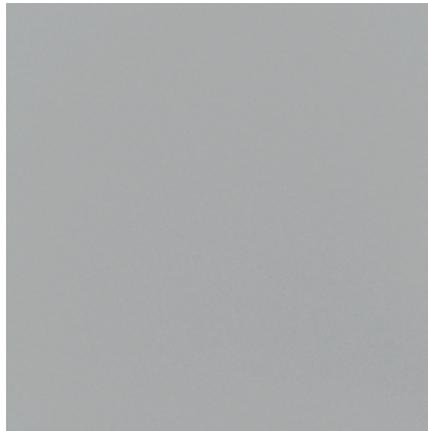

GRAY MN44

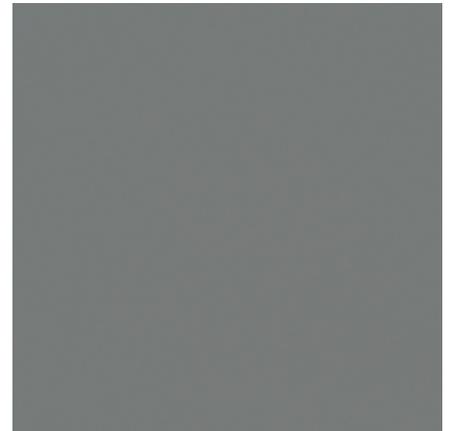

CHARCOAL MN45



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT™
Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT™
Not Applicable to Mesh-Mounted Tiles



CLIMATEPRO™



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FLOOR

FINISHES: MATTE | POLISHED | TEXTURED

USAGE




MATERIAL



PRICING



SPECIAL FEATURES



STONE LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	24 x 24 Floor Tile*	23-5/8" x 23-5/8" (60.00 cm x 60.00 cm)	3/8"	15.50	4
	12 x 24 Floor Tile	11-3/4" x 23-5/8" (29.85 cm x 60.0 cm)	5/16"	13.45	7

* Textured finish is available in 24 x 24 size only.

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors (Residential or Light Commercial)	≥ 0.42	●
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	●**
Ramps & Inclines	≥ 0.65	●
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Wall and mosaic tile suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* Matte and Textured only.

** Textured only.

TRIM

		NUMBER	SIZE	PIECES/ CARTON
	Floor Bullnose*	S44F9	4 x 24	12
	Cove Base*	P36C9TB	6 x 12	22
	Cove Outcorner*	PC36C9TB	1 x 6	15

* Bullnose available in both Matte and Polished

* Available in Matte finish only

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION & PRICING

Grout Joint Recommendation	Shade Variation
<p>Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)</p>	<p>MEDIUM (V2)</p>

PERFORMANCE CHARACTERISTICS

	ASTM#	TEXTURED RESULT	MATTE RESULT	POLISHED RESULT
Water Absorption	C373	< 0.5%	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbs.	> 275 lbs.	> 275 lbs.
Scratch Hardness	MOHS	8.0	6.0	5.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	③	All Residential / Light Commercial*
2 All Residential Areas	④	All Residential / Commercial**

* Polished

** Matte and Textured

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

FEATURES



PRE-CONSUMER
RECYCLED CONTENT



CERTIFIED
PORCELAIN™
TILE
0.5% or less water absorption

ZEROTOX
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

888.AOT.TILE



AMERICAN OLEAN®
PROVEN IN TILE™